




REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-10-03	AC

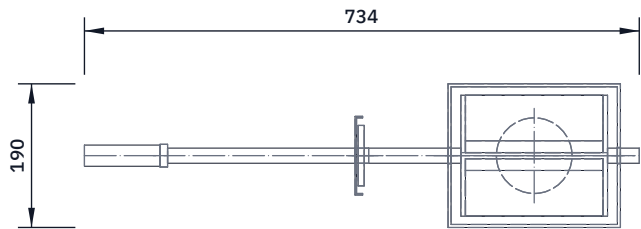


TOP VIEW
Scale 1:10; looking down (along -Z)

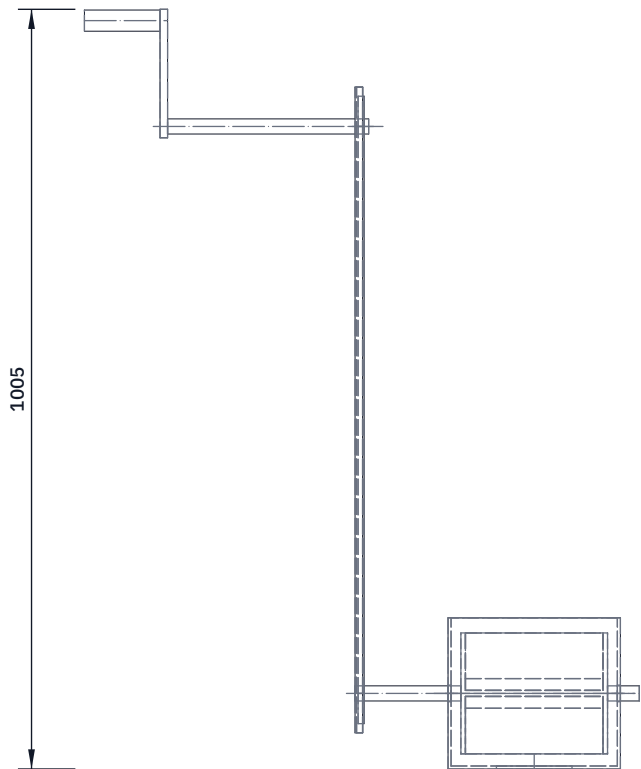

FRONT VIEW
Scale 1:10; looking at the front (along +Y)

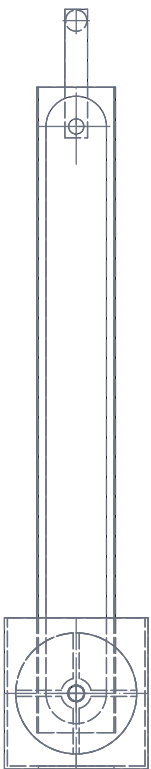

RIGHT VIEW
Scale 1:10; looking at the right side (along -X)

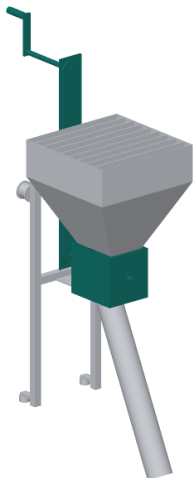

WHERE IT GOES
This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

Housing: 4 mm plate box 228 x 190 x 200 mm tall, open at the top to the hopper outlet; 100 mm round outlet in the bottom.

Rotor: 40 mm hub on a 20 mm shaft, two 8 mm plates welded across it to make four vanes, 160 mm diameter, 194 mm long, 6 mm end discs; 3 mm clear of the housing all round. About 0.77 L a pocket.

Shaft: in two flange bearings on the housing ends; it runs inward to a 15-tooth sprocket beside the carriage post.

Chain up to a matching sprocket on the 20 mm crank shaft, which passes over the top rail to a 140 mm crank and handle on the deck side, 1,260 mm above the floor. Sheet guard round the chain.

Check: rotor turns by hand with no rub; one turn, four pockets.

KILNDECK				github.com/BoujeeEnjinia1701/kilndeck			
KilnDeck metering rotor, housing and crank: making sketch							
DRAWING NO. KND-DWG-111			REV P1		SHEET 1 of 1		SIZE ANSI B
SCALE 1:10	UNITS mm	PROJECTION 		DATE 2026-10-03		DRAWN Amish Chadha	
MATERIAL / NOTES 8 mm plate; 40 mm bar; 20 mm bright bar; 4 mm plate; ISO 08B-1 chain							
Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com						Generated from cad/src; do not edit by hand	