BUILD PLAN SKETCH, PLAN NOT YET BUILT

KilnDeck · github.com/BoujeeEnjinia1701/kilndeck

| REV | DESCRIPTION | DATE | BY |
|---|---|---|---|
| P1 | Making sketch for the prototype build plan | 2026-10-03 | AC |




**TOP VIEW**

Scale 1:20; looking down (along -Z)

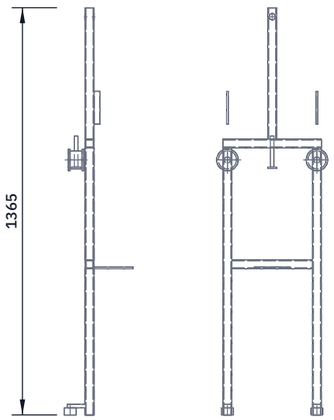


**FRONT VIEW**

Scale 1:20; looking at the front (along +Y)

**RIGHT VIEW**

Scale 1:20; looking at the right side (along -X)

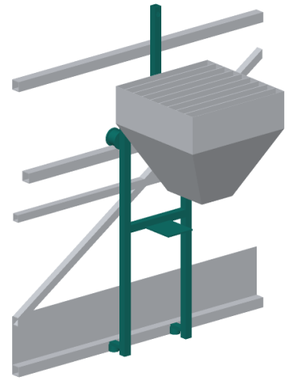

**WHERE IT GOES**

This part in colour, its neighbours in grey

**HOW TO MAKE IT AND HOW IT FITS**

Posts: two SHS 30 x 30 x 3, 300 mm apart, from the chord bottom up to 110 mm above the carriage rail; tied by two cross members.
Top wheels: 60 mm double-flanged, 40 mm tread, on 20 mm stub axles welded into the posts; they ride on top of the carriage rail.
Guide rollers: 40 mm ball-bearing rollers on vertical pins, on arms from the post feet; they bear on the outer face of the bottom chord and stop the hopper's weight swinging the frame in.
Crank post: SHS 30 x 30 x 3 up to 30 mm over the crank shaft; 21 mm bearing hole at 1,260 mm above the floor.
Hopper brackets: 6 mm plates from each post to the hopper wall.
Housing shelf: 6 x 120 mm plate under the rotor housing.
Clamp: M12 screw with a pad that clamps the frame to the rail.
Check: rolls the full rail with 2 to 5 mm play at the rollers.

KILNDECK

github.com/BoujeeEnjinia1701/kilndeck

# KilnDeck hopper carriage frame: making sketch

| DRAWING NO. | REV | SHEET | SIZE |
|---|---|---|---|
| KND-DWG-109 | P1 | 1 of 1 | ANSI B |

| SCALE | UNITS | PROJECTION | DATE | DRAWN |
|---|---|---|---|---|
| 1:20 | mm | | 2026-10-03 | Amish Chadha |

MATERIAL / NOTES

SHS 30 x 30 x 3 mm; 6 mm plate; 60 mm wheels; 40 mm rollers; S275

Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com

Generated from cad/src; do not edit by hand