BUILD PLAN SKETCH, PLAN NOT YET BUILT

KilnDeck · github.com/BoujeeEnjinia1701/kilndeck

REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-10-03	AC



TOP VIEW

Scale 1:20; looking down (along -Z)

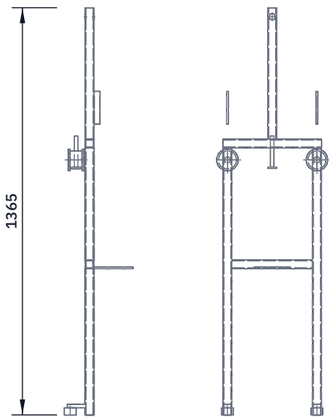

FRONT VIEW

Scale 1:20; looking at the front (along +Y)

RIGHT VIEW

Scale 1:20; looking at the right side (along -X)

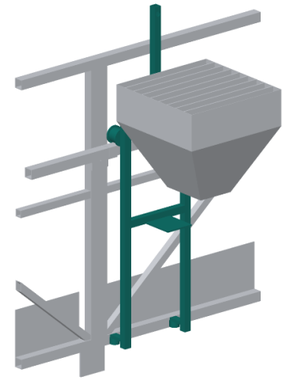

WHERE IT GOES

This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

Posts: two SHS 30 x 30 x 3, 300 mm apart, from the chord bottom up to 110 mm above the carriage rail; tied by two cross members.
Top wheels: 60 mm double-flanged, 40 mm tread, on 20 mm stub axles welded into the posts; they ride on top of the carriage rail.
Guide rollers: 40 mm ball-bearing rollers on vertical pins, on arms from the post feet; they bear on the outer face of the bottom chord and stop the hopper's weight swinging the frame in.
Crank post: SHS 30 x 30 x 3 up to 30 mm over the crank shaft; 21 mm bearing hole at 1,260 mm above the floor.
Hopper brackets: 6 mm plates from each post to the hopper wall.
Housing shelf: 6 x 120 mm plate under the rotor housing.
Clamp: M12 screw with a pad that clamps the frame to the rail.
Check: rolls the full rail with 2 to 5 mm play at the rollers.

KILNDECK

github.com/BoujeeEnjinia1701/kilndeck

KilnDeck hopper carriage frame: making sketch

DRAWING NO.	REV	SHEET	SIZE
KND-DWG-109	P1	1 of 1	ANSI B

SCALE	UNITS	PROJECTION	DATE	DRAWN
1:20	mm		2026-10-03	Amish Chadha

MATERIAL / NOTES

SHS 30 x 30 x 3 mm; 6 mm plate; 60 mm wheels; 40 mm rollers; S275

Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com

Generated from cad/src; do not edit by hand