


REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-10-03	AC

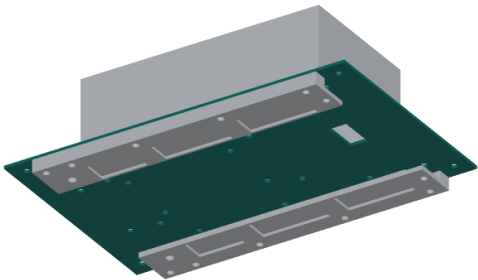


WHERE IT GOES

This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

Cut 240 x 150 mm from 2 mm carbon plate (waterjet or CNC service);
origin at the centre;
X is positive toward the front, Y to the left; top face is the datum.
Frame holes 4.5 mm at 110 mm each side of centre, 65 mm each side (4).
Rail holes 4.5 mm on lines 70 mm each side: at -93, -75, -30, 30, 90
mm along X on both lines; stop holes 4.5 mm at 95 mm, 55 mm each side.
Insert holes 4.22 mm (16): lid flange at -60, 0, 60 mm, 50 each
side; 25 mm standoffs at -75 and 25 mm, 30 each side; 8 mm
standoffs at -66 and 6 mm, 21 each side; bar posts -95 mm, 28 each side.
Cable slot 12 x 24 mm from 70 to 82 mm along X, on the centre line.
Seal every cut edge with thin epoxy; wear a mask (carbon dust).
Bond M3 flush inserts with structural epoxy, flange on top, body
flush underneath (the shoe slides 0.3 mm below the plate).
Check: run a straight edge across the underside; nothing proud.

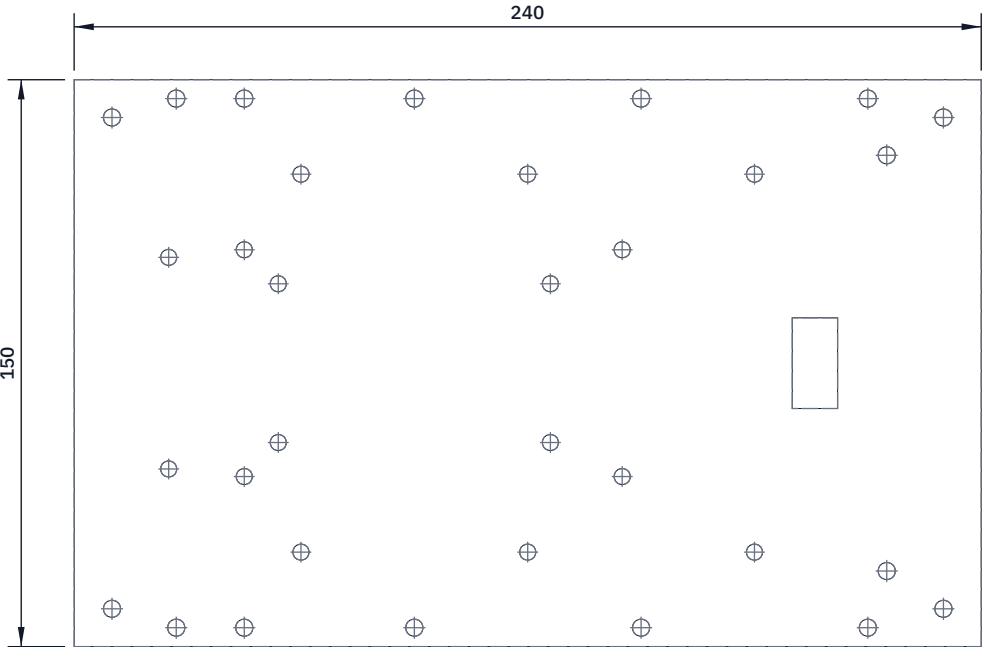

TOP VIEW

Scale 1:2; looking down (along -Z)



FRONT VIEW

Scale 1:2; looking at the front (along +Y)



RIGHT VIEW

Scale 1:2; looking at the right side (along -X)

KITEWRIGHT CORE

github.com/BoujeeEnjinia1701/kitewright-core

Kitewright Core plate: making sketch

DRAWING NO. KWC-DWG-101			REV P1	SHEET 1 of 1	SIZE ANSI B
SCALE 1:2	UNITS mm	PROJECTION 	DATE 2026-10-03		DRAWN Amish Chadha
MATERIAL / NOTES Carbon fibre plate 2 mm, quasi-isotropic					
Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com					Generated from cad/src; do not edit by hand