


REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-10-03	AC

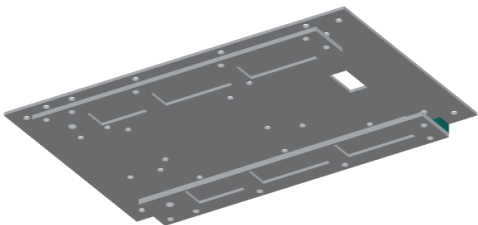

WHERE IT GOES

This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

Make two, the same. Saw 10 x 6 mm bar to 200 mm; square the ends.


Lay it 6 mm side down. Mark a centre line 5 mm from each edge.

Holes 4.5 mm on the centre line at 7, 25, 70, 130 and 190 mm from the rear end (X = -93, -75, -30, 30 and 90 mm).

Mill three windows 6 mm wide through the 6 mm height, leaving 1.5 mm walls: 31.5 to 63.5, 76.5 to 123.5, 136.5 to 183.5 mm from the rear end (6.5 mm of web from each hole centre).

Deburr; break every edge lightly. The outer 6 mm face lines up with the long edge of the core plate.

Check: lay it under the plate and look through all five holes.

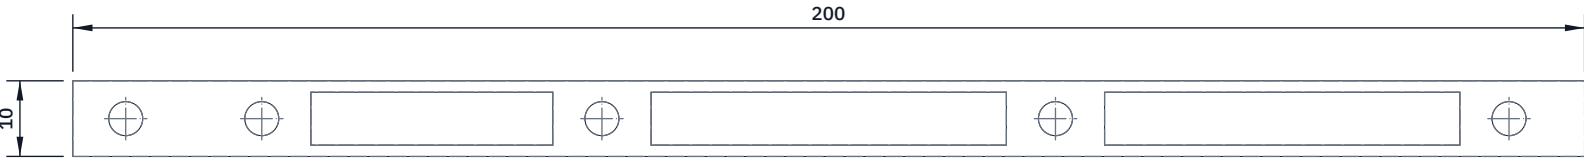

TOP VIEW

Scale 1:1; looking down (along -Z)



FRONT VIEW

Scale 1:1; looking at the front (along +Y)



RIGHT VIEW

Scale 1:1; looking at the right side (along -X)

KITEWRIGHT CORE

github.com/BoujeeEnjinia1701/kitewright-core

Kitewright Core rail spacer bar (make 2): making sketch

DRAWING NO. KWC-DWG-102			REV P1		SHEET 1 of 1		SIZE ANSI B		
SCALE 1:1		UNITS mm		PROJECTION 		DATE 2026-10-03		DRAWN Amish Chadha	
MATERIAL / NOTES Aluminium flat bar 10 x 6 mm, 6061-T6									
Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com									
Generated from cad/src; do not edit by hand									