


CONCEPT, NOT FOR FABRICATION


Kitewright Core · github.com/BoujeeEnjinia1701/kitewright-core

REV	DESCRIPTION	DATE	BY
P1	Concept sheet	2026-10-03	AC

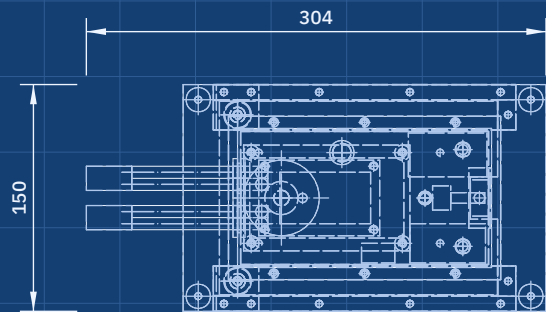


TOP VIEW

Scale 1:5; looking down (along -Z)

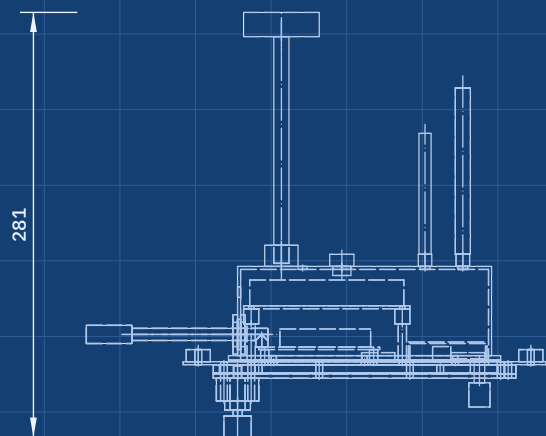


FRONT VIEW

Scale 1:5; looking at the front (along +Y)

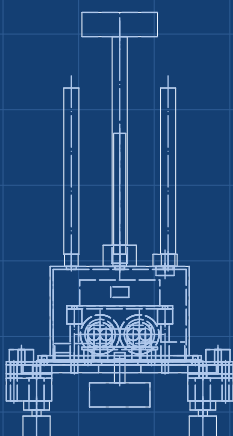

RIGHT VIEW

Scale 1:5; looking at the right side (along -X)

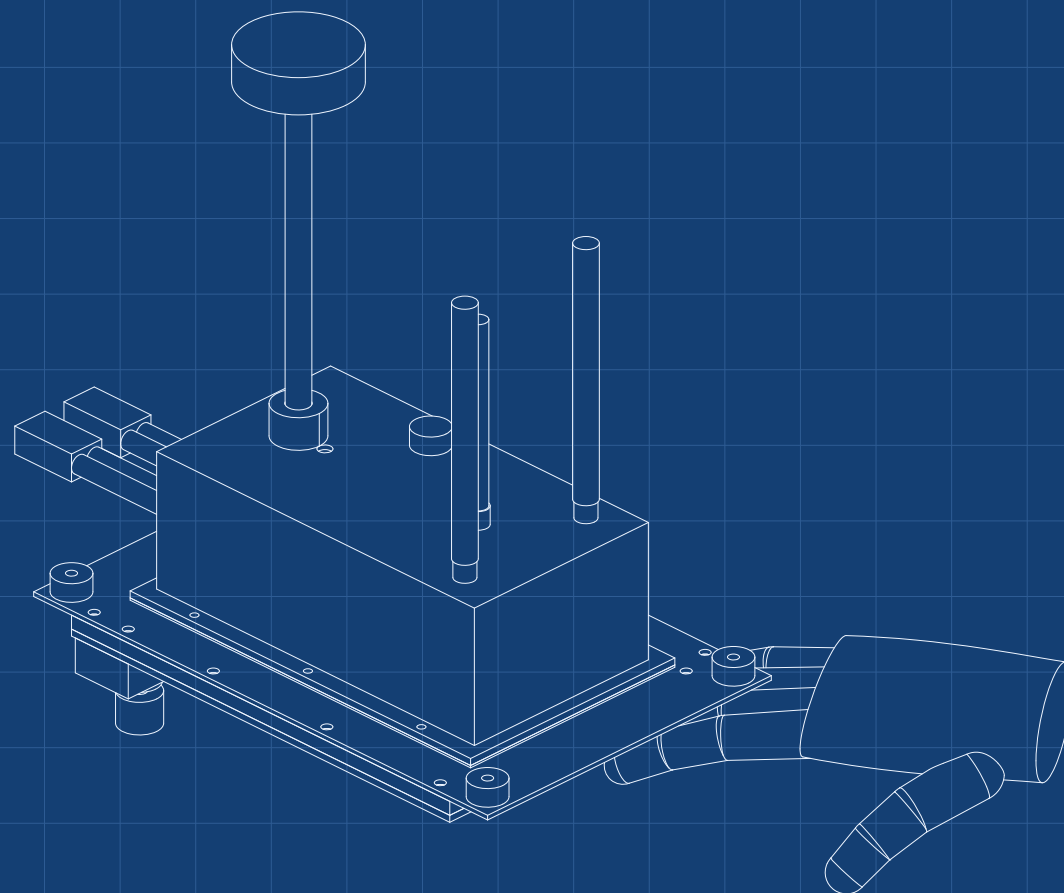

ISOMETRIC VIEW

Not to scale; grey is for scale; seen from the front right and above, about 30 deg elevation

KEY FIGURES

Core plate 240 x 150 mm; bolts to the frame on a 220 x 130 mm M4 pattern
Lid 168 x 92 x 62 mm, rises through a 200 x 112 mm opening in the frame deck
Plain rail and two locking pins; payload shoe 184 x 128 x 5 mm
Rated payload 5 kg; vertical design load 147 N, lips 99 x, screws 69 x
DS-014 40-pin pigtail; 100 W to the payload, 8 A switch
Bus 18 to 60 V; core about 1.27 kg; USD 3,941 with ground station
Hover time at 5,000 m, -20 C: 47 % cold packs, 70 % ColdCell (est.)

KITEWRIGHT CORE

github.com/BoujeeEnjinia1701/kitewright-core

Shared avionics, power and payload core

DRAWING NO. KWC-DWG-010		REV P1	SHEET 1 of 1	SIZE ANSI B
SCALE 1:5	UNITS mm	PROJECTION 	DATE 2026-10-03	DRAWN Amish Chadha
MATERIAL / NOTES Massing model for concept communication				
Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com			Generated from cad/src; do not edit by hand	