


REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-10-03	AC
P2	Lightened under Amish's decision 33B (KWC-DDR-003)	2026-10-03	AC

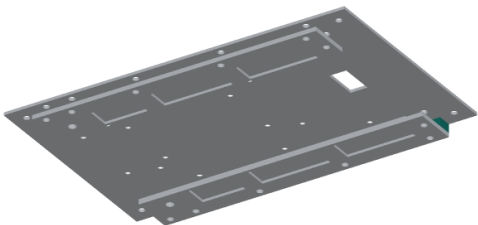


WHERE IT GOES

This part in colour, its neighbours in grey


HOW TO MAKE IT AND HOW IT FITS

Make two, the same. Saw 10 x 6 mm bar to 200 mm; square the ends.
Lay it 6 mm side down. Mark a centre line 5 mm from each edge.
Holes 4.5 mm on the centre line at 7, 25, 70, 130 and 190 mm from the rear end (X = -93, -75, -30, 30 and 90 mm).
Mill three windows 3.6 mm tall through the 10 mm width, centred on the 6 mm height (1.2 mm left top and bottom): X -66 to -36, -24 to 24 and 36 to 84 mm (34 to 64, 76 to 124, 136 to 184 from the rear).
Deburr and clear-anodise (it touches the carbon plate).
Check: lay it under the plate and look through all five holes.

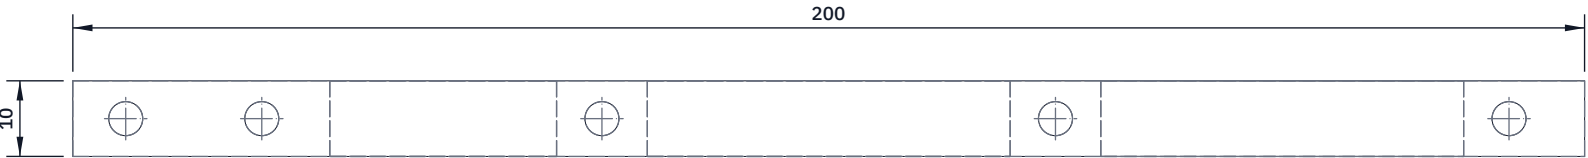

TOP VIEW

Scale 1:1; looking down (along -Z)



FRONT VIEW

Scale 1:1; looking at the front (along +Y)



RIGHT VIEW

Scale 1:1; looking at the right side (along -X)

KITEWRIGHT CORE

github.com/BoujeeEnjinia1701/kitewright-core

Kitewright Core rail spacer bar (make 2): making sketch

DRAWING NO. KWC-DWG-102			REV P2	SHEET 1 of 1		SIZE ANSI B			
SCALE 1:1		UNITS mm	PROJECTION 		DATE 2026-10-03		DRAWN Amish Chadha		
MATERIAL / NOTES Aluminium flat bar 10 x 6 mm, 6061-T6, clear-anodised									
Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com								Generated from cad/src; do not edit by hand	