




REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-10-03	AC

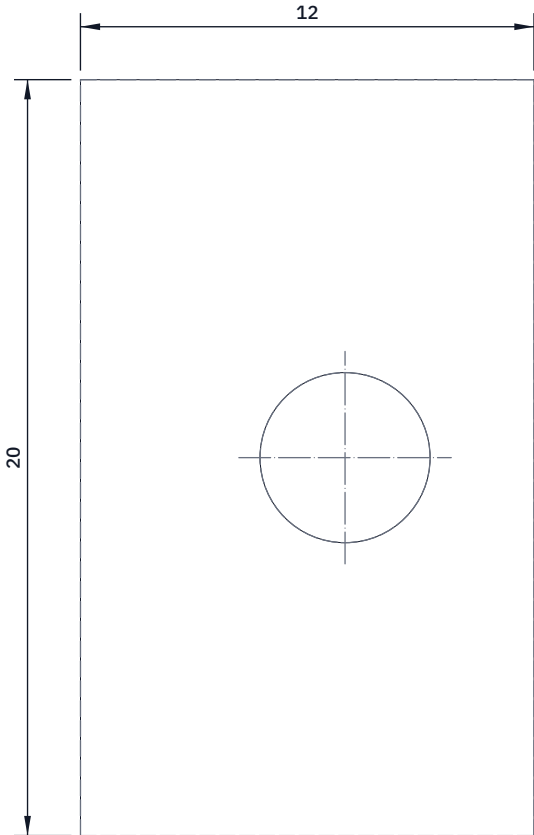


TOP VIEW
Scale 5:1; looking down (along -Z)

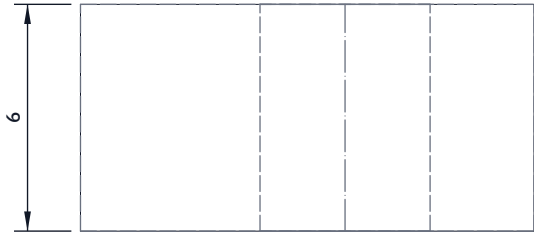

FRONT VIEW
Scale 5:1; looking at the front (along +Y)

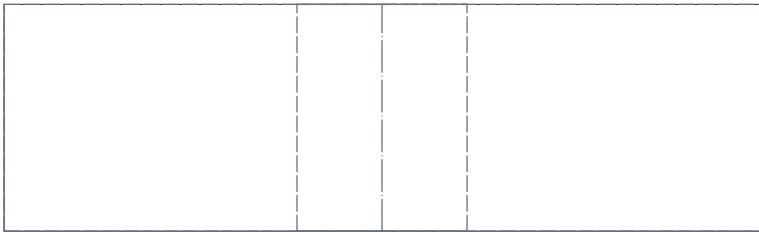

RIGHT VIEW
Scale 5:1; looking at the right side (along -X)

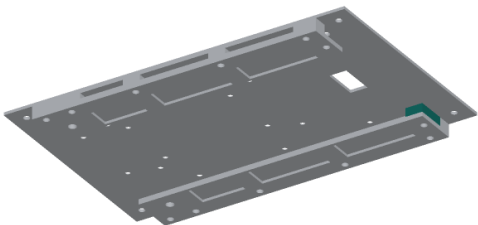

WHERE IT GOES
This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

Make two, the same. Saw 20 x 6 mm bar into 12 mm pieces.
File the cut ends square: the rear face is where the payload shoe stops, so it must be flat and square to the 6 mm face.
Drill one 4.5 mm hole 7 mm from the rear face, 5 mm from the front end and 10 mm from each side.
Fit: between the plate and the lip, against the spacer bar, at the front end of the rail. Its rear face is 12 mm in from the rail's front end.
Check: both stops line up across the plate within 0.2 mm.

KITEWRIGHT CORE				github.com/BoujeeEnjinia1701/kitewright-core			
Kitewright Core front stop (make 2): making sketch							
DRAWING NO. KWC-DWG-103			REV P1		SHEET 1 of 1		SIZE ANSI B
SCALE 5:1	UNITS mm	PROJECTION 		DATE 2026-10-03		DRAWN Amish Chadha	
MATERIAL / NOTES Aluminium flat bar 20 x 6 mm, 6061-T6							
Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com							
Generated from cad/src; do not edit by hand							