


REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-10-03	AC
P2	Lightened under Amish's decision 33B (KWC-DDR-003)	2026-10-03	AC

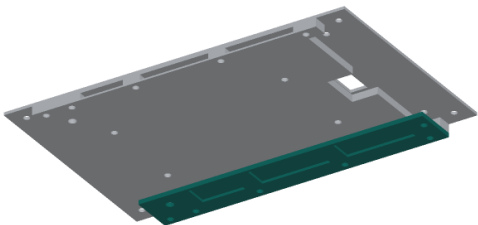

WHERE IT GOES

This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

Make a left and a right. Saw 30 x 3 mm bar to 200 mm.


Screw holes 4.5 mm on a line 5 mm from the OUTER edge, at 7, 25, 70, 130 and 190 mm from the rear end; stop hole 4.5 mm at 195 mm, 20 mm from the outer edge.

Pin hole 5.5 mm at 16 mm from the rear end, 20 mm from the outer edge. Countersink the screw holes 90 deg from the UNDERSIDE so the M4 heads sit flush; the left and right lips are mirror images.

Pockets from the UNDERSIDE, 1.8 mm deep, 2 to 18 mm from the inner edge, at 34 to 64, 76 to 124 and 136 to 184 mm from the rear end.

Stick 0.7 mm UHMW tape on the top face from the inner edge to 1 mm short of the spacer, rear end to the stop; cut out the pin hole.

Check: a 5 mm shoe offcut slides with a 0.2 to 0.4 mm feeler gap.

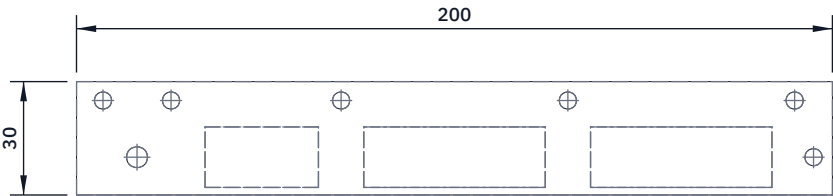

TOP VIEW

Scale 1:2; looking down (along -Z)



FRONT VIEW

Scale 1:2; looking at the front (along +Y)



RIGHT VIEW

Scale 1:2; looking at the right side (along -X)

KITEWRIGHT CORE

github.com/BoujeeEnjinia1701/kitewright-core

Kitewright Core rail lip (make 2, mirror pair): making sketch

DRAWING NO. KWC-DWG-104			REV P2	SHEET 1 of 1	SIZE ANSI B
SCALE 1:2	UNITS mm	PROJECTION 	DATE 2026-10-03		DRAWN Amish Chadha
MATERIAL / NOTES Aluminium flat bar 30 x 3 mm, 6061-T6; UHMW-PE tape 0.7 mm					
Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com					Generated from cad/src; do not edit by hand