



REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-10-03	AC
P2	Lightened under Amish's decision 33B (KWC-DDR-003)	2026-10-03	AC

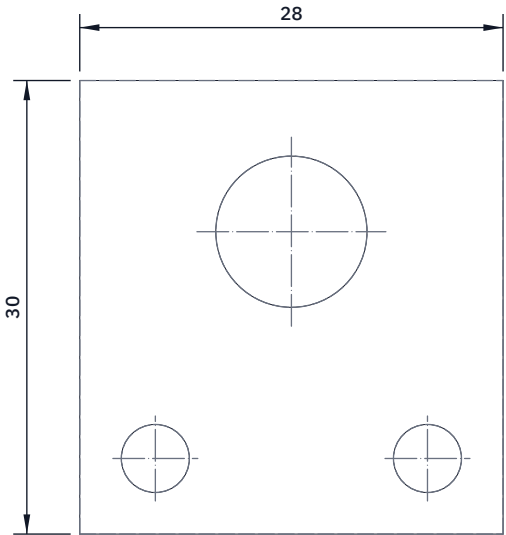


TOP VIEW

Scale 2:1; looking down (along -Z)

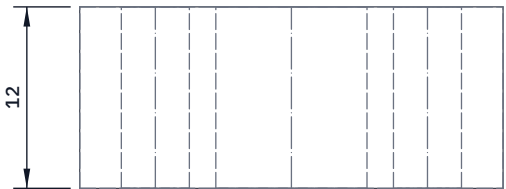


FRONT VIEW

Scale 2:1; looking at the front (along +Y)

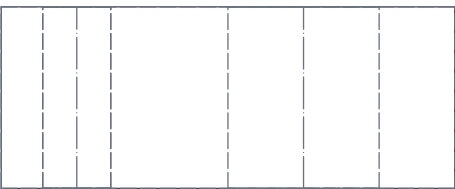

RIGHT VIEW

Scale 2:1; looking at the right side (along -X)

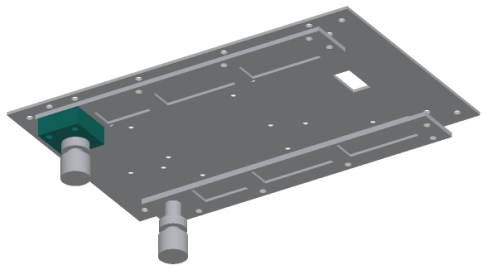

WHERE IT GOES

This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

Make two, the same. Saw 30 x 12 mm bar to 28 mm long.

Plunger hole: centre 14 mm from each end, 20 mm from the OUTER face; drill 9.0 mm through, square to the 28 x 30 face, and tap M10 x 1 (fine thread) all the way.

Two screw holes 4.5 mm, 5 mm from the outer face, at 5 mm and 23 mm from the rear end.

Fit: under the lip at the rear of the rail, outer face flush with the plate edge; two M4 x 30 cap screws through block, lip, spacer and plate, nylon-insert nuts on top.

Check: the plunger screws in by hand; its pin comes up through the lip hole without touching the sides.

KITEWRIGHT CORE

github.com/BoujeeEnjinia1701/kitewright-core

Kitewright Core pin block (make 2): making sketch

DRAWING NO. KWC-DWG-105			REV P2	SHEET 1 of 1	SIZE ANSI B
SCALE 2:1	UNITS mm	PROJECTION 	DATE 2026-10-03		DRAWN Amish Chadha
MATERIAL / NOTES Aluminium bar 30 x 12 mm, 6061-T6					
Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com				Generated from cad/src; do not edit by hand	