


REV	DESCRIPTION	DATE	BY
P1	New part under Amish's decision 33B (KWC-DDR-003)	2026-10-03	AC



TOP VIEW

Scale 2:1; looking down (along -Z)

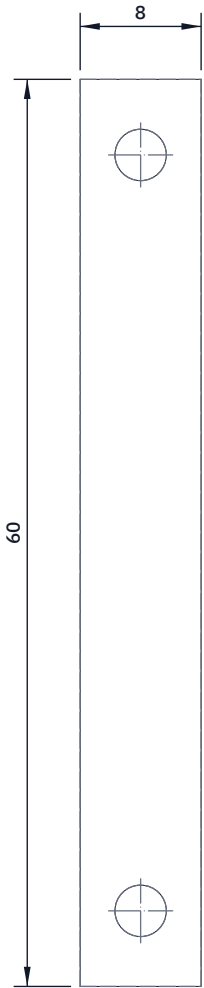


FRONT VIEW

Scale 2:1; looking at the front (along +Y)



RIGHT VIEW

Scale 2:1; looking at the right side (along -X)

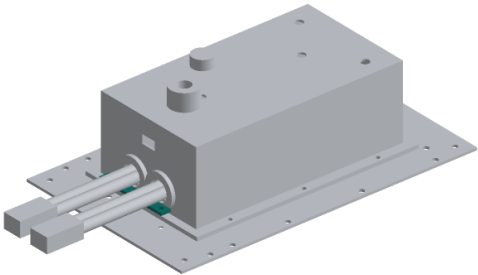

WHERE IT GOES

This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

Cut 60 x 8 mm from 2 mm G10, wet or under extraction; wear a mask (glass dust) and file the edges smooth.

Two 3.4 mm holes on the centre line, 25 mm each side of the middle (a 50 mm pattern).

Fit: on two 12 mm M3 female-female standoffs, on countersunk screws set from below the plate at X -95 mm, 25 mm each side, behind the lid; two M3 screws from the top.

The frame's four power leads lie on it and are tied to it with four UV-stable cable ties (step 11).

Check: it clears the lid flange and the frame deck by 1 mm or more.

Kitewright Core strain-relief bar: making sketch

DRAWING NO. KWC-DWG-109			REV P1	SHEET 1 of 1	SIZE ANSI B
SCALE 2:1	UNITS mm	PROJECTION 	DATE 2026-10-03		DRAWN Amish Chadha
MATERIAL / NOTES G10 / FR4 glass-epoxy sheet 2 mm (offcut of the damping plate sheet)					
Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com					Generated from cad/src; do not edit by hand