


REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-10-03	AC
P2	KWL-DDR-004: payload shoe to KWC-DWG-106	2026-10-04	AC




TOP VIEW
Scale 1:2; looking down (along -Z)

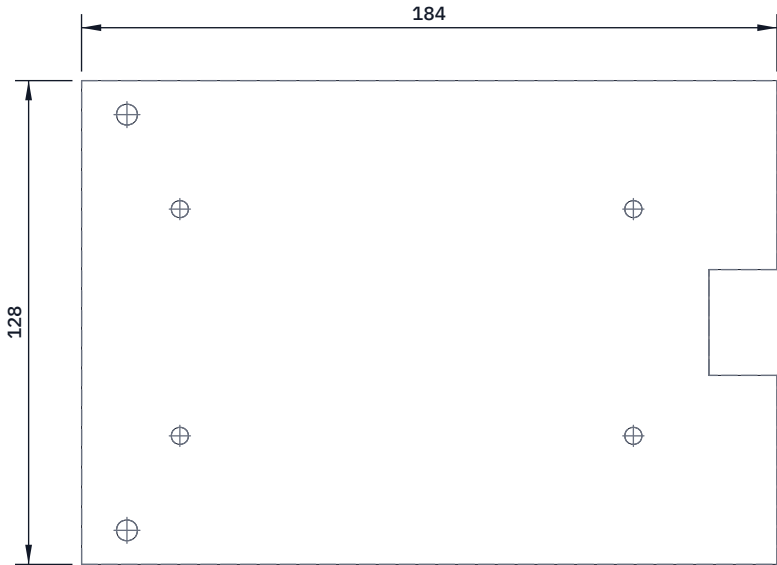

FRONT VIEW
Scale 1:2; looking at the front (along +Y)



RIGHT VIEW
Scale 1:2; looking at the right side (along -X)

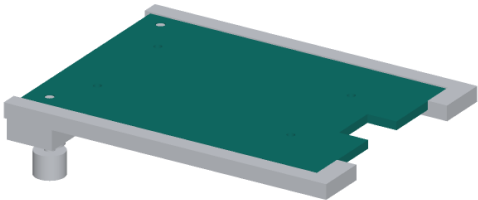

WHERE IT GOES
This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

- Made to the Kitewright Core's KWC-DWG-106: 184 x 128 x 5, edges straight and smooth
- Front notch 18 deep x 28 wide for the Core's DS-014 pigtail
- Two 5.5 pin holes 12 from the rear edge, 55 either side of the centre line
- Four 4.5 holes 26 from the rear and 146 from the rear, 30 either side
- Top face flat and clean: it runs 0.3 below the Core plate
- Float release: four 4.5 holes for the saddles, 41 and 151 from the rear, 30 either side; release unit on the four standard holes
- Tether module: four more 4.5 holes for the converter posts, 51 and 171 from the rear
- Check: slides the full length of the rail and both pins drop in

KITEWRIGHT LIFT

github.com/BoujeeEnjinia1701/kitewright-lift

Payload shoe: making sketch

DRAWING NO. KWL - DWG - 112		REV P2	SHEET 1 of 1	SIZE ANSI B
SCALE 1:2	UNITS mm	PROJECTION 	DATE 2026-10-03	DRAWN Amish Chadha
MATERIAL / NOTES 6061-T6 plate 5 mm				
Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com				

Generated from cad/src; do not edit by hand