
OPA333 MODULE for a DIP-8 socket — the op-amp runs from a 5 V window floating on a 2 V node (it never sees 9 V)

VM = 9 V * R2/(R1+R2) with the 78L05 ground current (about 4 mA) flowing into the node: R1 1k3 / R2 220R give VM ~ 2.0 V. VREG = VM + 5 V.

HT7550-1 (2.5 uA ground current) instead of the 78L05: R1 62k / R2 15k. Op-amp pins 1, 5, 8 are not connected. Plug-in side: J1 -> the pedal DIP-8 plug (see docs).

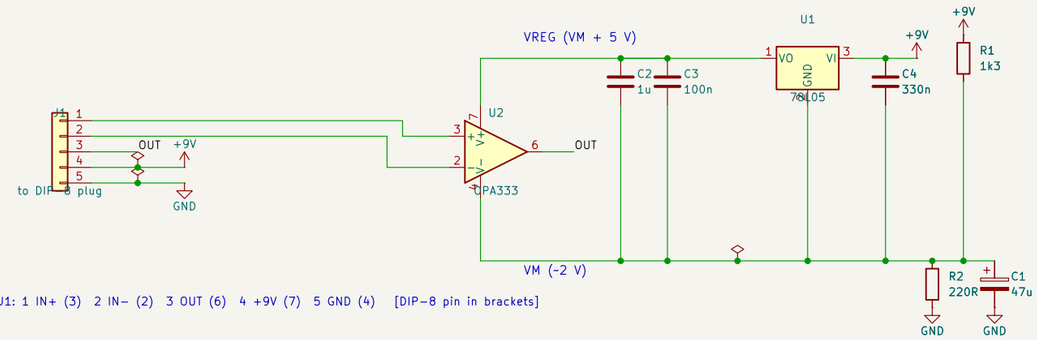

J1: 1 IN+ (3) 2 IN- (2) 3 OUT (6) 4 +9V (7) 5 GND (4) [DIP-8 pin in brackets]

Floating 5 V window for a low-voltage op-amp in a 9 V pedal

T Lab Custom Audio

Sheet: /

File: OPA333_MODULE.kicad_sch

Title: OPA333 module (LDO window)

Size: A3	Date: 2026-10-25	**Rev: 0.1**
KiCad E.D.A. 10.0.7		Id: 1/1