



REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-10-03	AC
P2	KWR-DDR-004: 156 wide, Core opening and doubler, bulkhead 645	2026-10-04	AC

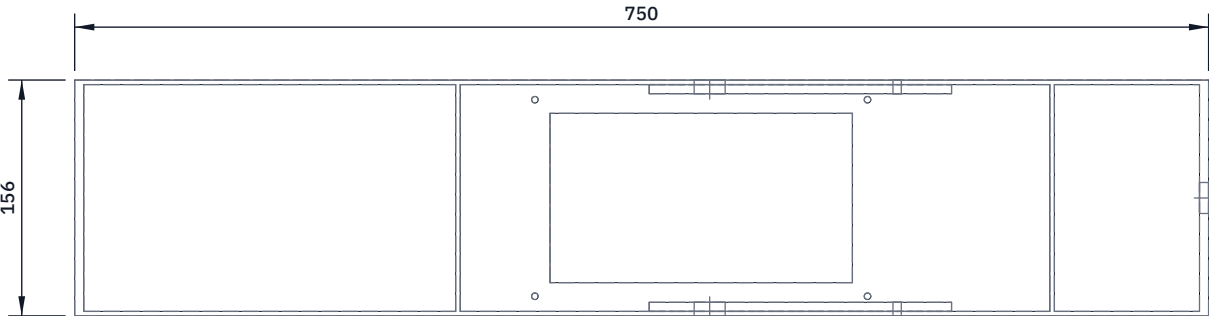


TOP VIEW

Scale 1:5; looking down (along -Z)

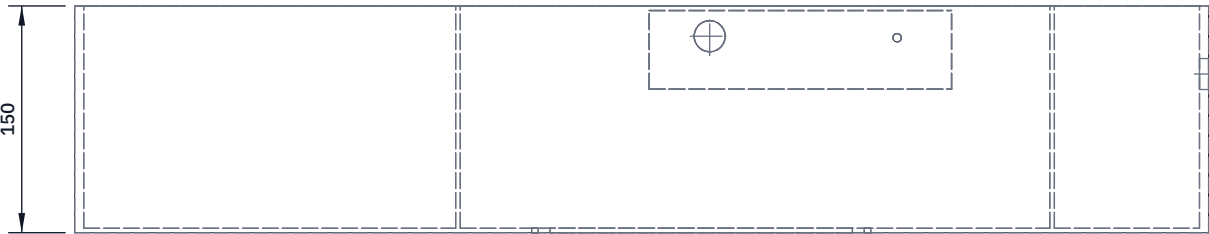


FRONT VIEW

Scale 1:5; looking at the front (along +Y)



RIGHT VIEW

Scale 1:5; looking at the right side (along -X)

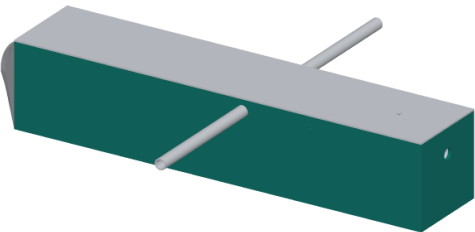

WHERE IT GOES

This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

- Box 750 long, 156 wide, 150 high, open on top for the hatch.
- Cut two sides and the floor from 3 mm lite-ply; firewall and rear wall from 6 mm birch ply.
- Two 3 mm bulkheads 252 and 645 back from the firewall face.
- 6 mm doublers inside each side, 200 x 52, top edge 3 below the rim.
- Drill the joiner hole 20.5 through side and doubler, centre 420 back and 20 down from the rim.
- Drill the wing bolt hole 5.5, centre 544 back and 21 down; same on both sides.
- Drill the rear wall 20.5 for the tail boom, 45 down from the rim, on the centre line.
- Glue on a flat board with a square; check both joiner holes line up with a straight 20 mm rod.
- Floor: cut the Kitewright Core's 200 x 112 lid opening centred 414 back, and four 4.3 holes on a 220 x 130 pattern round it.
- Bond the 6 mm birch Core deck doubler (300 x 150, same opening and holes, M4 T-nuts) on the floor inside.
- Glass the outside with 80 g/m2 cloth; keep the floor flat under the Core's four spacers.

DRAWING NO. KWR-DWG-101			REV P2	SHEET 1 of 1	SIZE ANSI B
SCALE 1:5	UNITS mm	PROJECTION 	DATE 2026-10-03		DRAWN Amish Chadha
MATERIAL / NOTES 3 mm poplar lite-ply sides, floor and bulkheads; 6 mm birch ply firewall, rear wall and doublers; glass cloth outside					
Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com					Generated from cad/src; do not edit by hand