


REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-10-03	AC



WHERE IT GOES

This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS


Rod 12 mm, 182 long; clamp grips the boom 70 inboard of each motor.

Clamp: 30 long, 36 wide, split under the boom; two M3 bolts close it; 12 bore 20 deep for the rod.

Fairing: elliptical 32 x 16, printed hollow, slides over the rod with its long axis fore and aft.

Foot: 36 round, 10 thick, with a 20 deep socket for the rod; print in TPU.

Glue the rod into the clamp and foot with epoxy; all four feet must touch a flat floor.

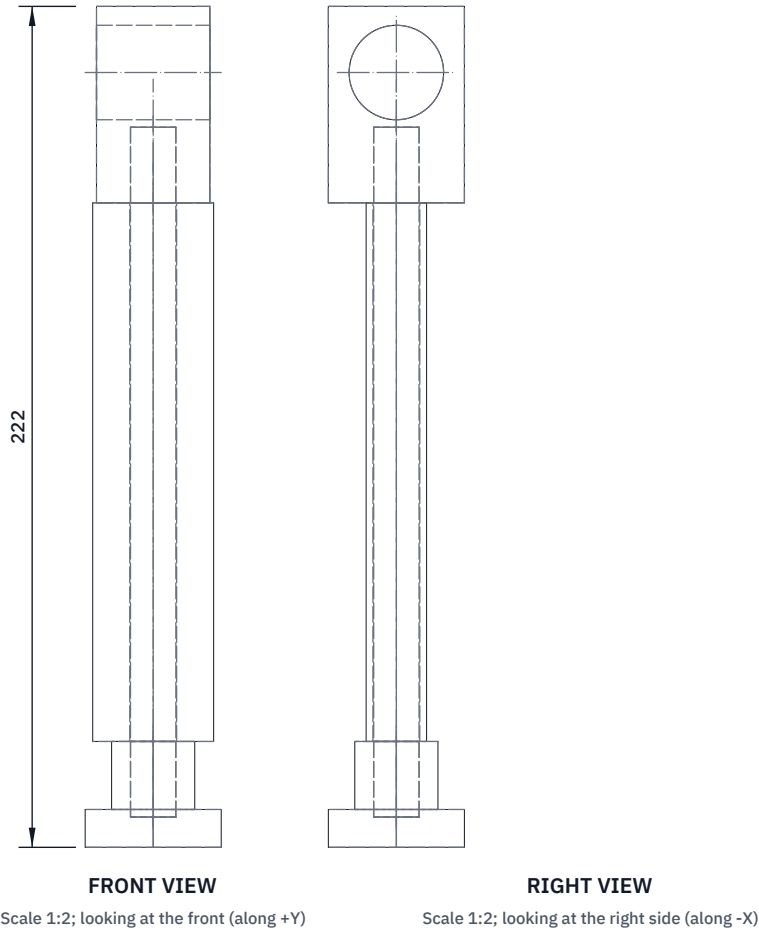

KITEWRIGHT RANGE				github.com/BoujeeEnjinia1701/kitewright-range			
Kitewright Range: landing leg (make 4) making sketch							
DRAWING NO. KWR-DWG-109			REV P1		SHEET 1 of 1		SIZE ANSI B
SCALE 1:2	UNITS mm	PROJECTION 		DATE 2026-10-03		DRAWN Amish Chadha	
MATERIAL / NOTES Carbon rod 12 mm, printed ASA clamp and fairing, printed TPU foot							
Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com				Generated from cad/src; do not edit by hand			