


REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-10-03	AC
P2	KWR-DDR-003: 22 in propellers, booms 490 out and 1,142 long	2026-10-03	AC



TOP VIEW

Scale 1:10; looking down (along -Z)

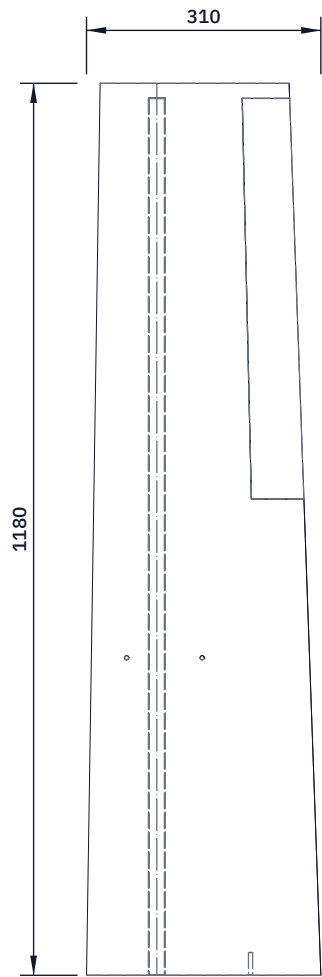


FRONT VIEW

Scale 1:10; looking at the front (along +Y)



RIGHT VIEW

Scale 1:10; looking at the right side (along -X)

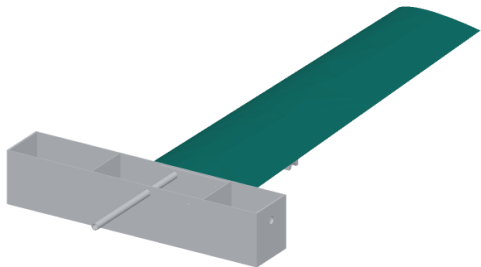

WHERE IT GOES

This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

- Hot-wire cut NACA 2412 cores: root chord 310, tip chord 250, panel 1,180 long.
- Keep the 30 % chord line straight: it is the spar line, square to the root rib.
- Rout a 22 channel on the spar line and bond in the carbon spar, 1,160 long, flush with the root.
- Set two 3 mm ply hardpoints in the lower skin over the boom pylon, 490 out from the centre line.
- Lay a 10 mm conduit from the pylon to the root for the boom wires; servo bay behind the spar.
- Glass both sides; glue the 3 mm ply root rib with the 20 joiner hole and an M5 insert at 70 % chord.
- Cut the aileron free at 75 % chord from 700 to 1230 out; hinge on tape.
- Make the left panel as a mirror image; the left panel also takes the pitot tube.

KITEWRIGHT RANGE			github.com/BoujeeEnjinia1701/kitewright-range		
Kitewright Range: wing panel with aileron (make a left and a right) making sketch					
DRAWING NO. KWR-DWG-105		REV P2	SHEET 1 of 1		SIZE ANSI B
SCALE 1:10	UNITS mm	PROJECTION 	DATE 2026-10-03		DRAWN Amish Chadha
MATERIAL / NOTES XPS foam 30 kg/m3, carbon spar tube 22 x 20, 80 g/m2 glass both sides, 3 mm ply root rib					
Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com			Generated from cad/src; do not edit by hand		