



REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-10-03	AC
P2	KWR-DDR-003: 22 in propellers, booms 490 out and 1,142 long	2026-10-03	AC




TOP VIEW
Scale 1:2; looking down (along -Z)



WHERE IT GOES
This part in colour, its neighbours in grey

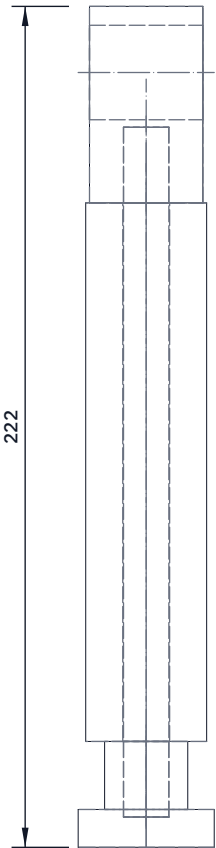

FRONT VIEW
Scale 1:2; looking at the front (along +Y)

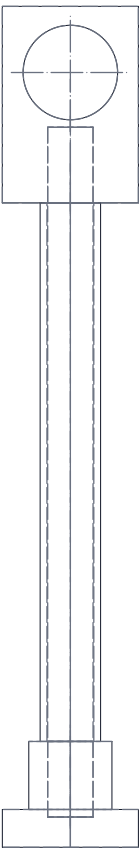

RIGHT VIEW
Scale 1:2; looking at the right side (along -X)

HOW TO MAKE IT AND HOW IT FITS

- Rod 12 mm, 182 long; clamp grips the boom 70 inboard of each motor.
- Clamp: 30 long, 36 wide, split under the boom; two M3 bolts close it; 12 bore 20 deep for the rod.
- Fairing: elliptical 32 x 16, printed hollow, slides over the rod with its long axis fore and aft.
- Foot: 36 round, 10 thick, with a 20 deep socket for the rod; print in TPU.
- Glue the rod into the clamp and foot with epoxy; all four feet must touch a flat floor.

Kitewright Range: landing leg (make 4) making sketch

DRAWING NO. KWR-DWG-109			REV P2	SHEET 1 of 1	SIZE ANSI B
SCALE 1:2	UNITS mm	PROJECTION 	DATE 2026-10-03		DRAWN Amish Chadha
MATERIAL / NOTES Carbon rod 12 mm, printed ASA clamp and fairing, printed TPU foot					
Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com					Generated from cad/src; do not edit by hand