



CONCEPT, NOT FOR FABRICATION

LampNode · github.com/BoujeeEnjinia1701/lampnode


REV	DESCRIPTION	DATE	BY
P1	Preliminary GA from cad/src/model.py (LPN-CAL-001)	2026-09-25	AC
P2	Port power note: 2.5 W above 50 C inside (LPN-DDR-002)	2026-09-25	AC
P3	Design for construction: fixings, boards, bracket (LPN-DDR-003)	2026-09-30	AC

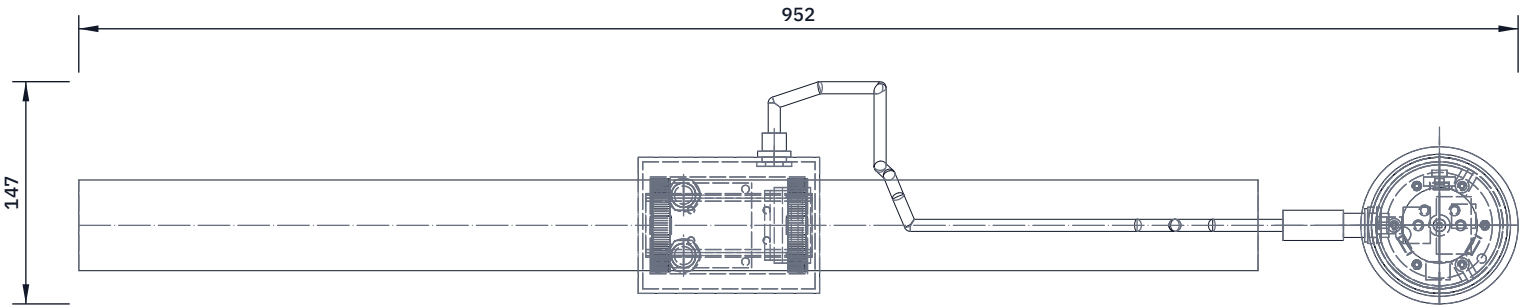


TOP VIEW
Scale 1:5; looking down (along -Z)

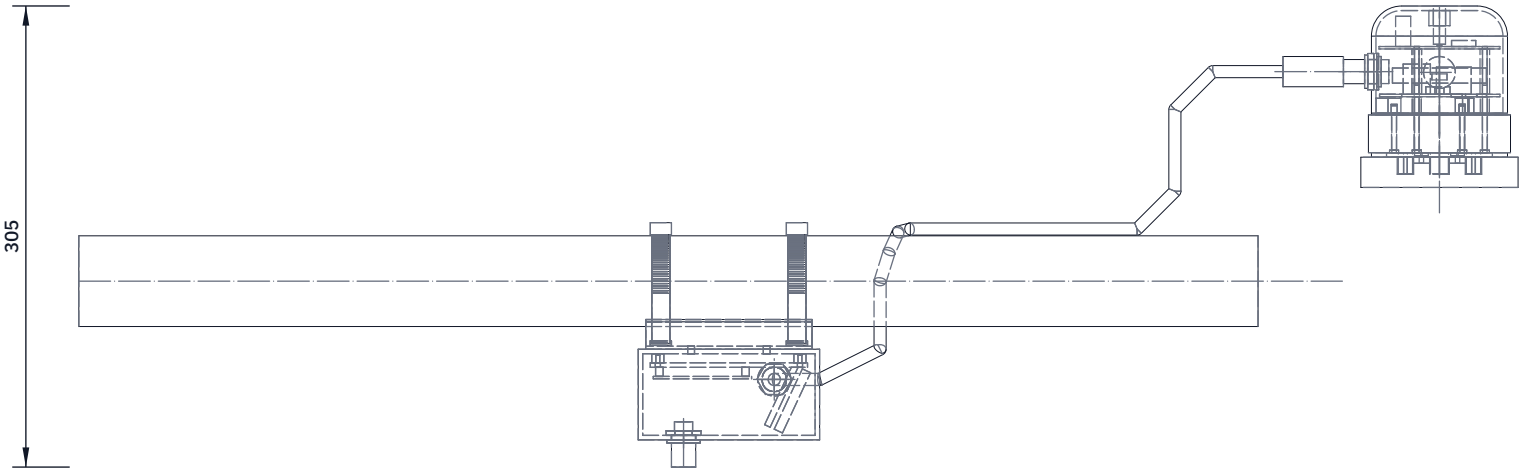

FRONT VIEW
Scale 1:5; looking at the front (along +Y)

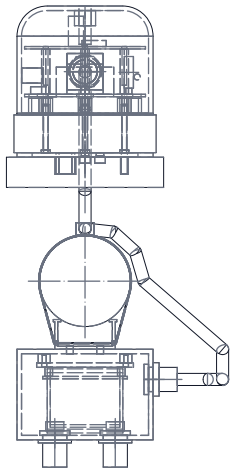

RIGHT VIEW
Scale 1:5; looking at the right side (along -X)

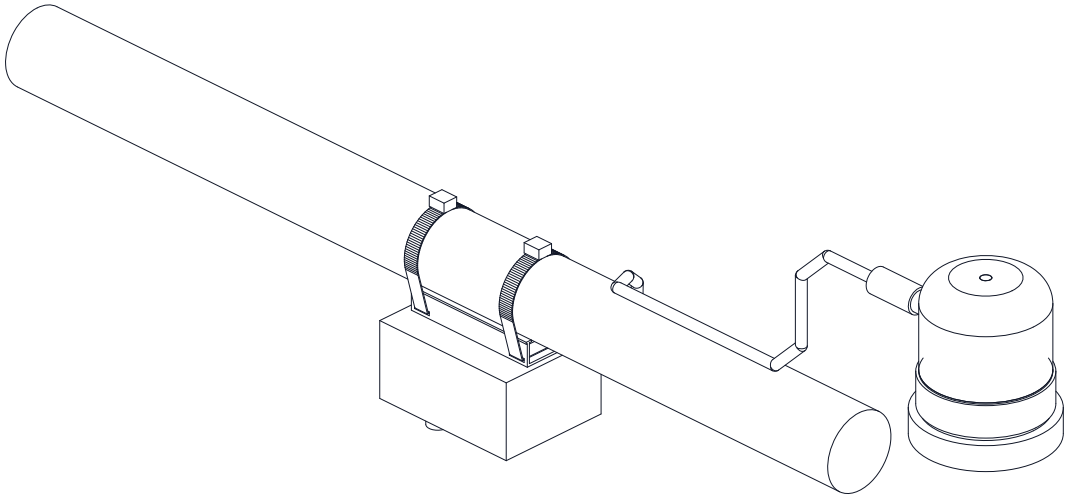

ISOMETRIC VIEW

Not to scale; grey = existing receptacle and arm; seen from the front right and above, about 30 deg elevation

KEY DIMENSIONS AND INTERFACES (MM)

Controller 94 dia. x 111 incl. blades; dome 90 x 72
Base: ANSI C136.41 7-contact twist-lock (representative),
3 power blades, 4 low-voltage contacts, no earth
Sensor head 120 x 90 x 60, center 470 from
receptacle toward the pole; 15 below a 60 dia. arm
Radar tilted 25 deg down, looking along the street
M12 5-pole: dome pad to head, 1 m cable; 2 ports in head lid
Band clamps for 50 to 80 arms, pitch 90, through
slots in a folded 2 mm bracket; arm rests on rubber strips
Dome and board stack: 6 x M3 from under the base
Mains 120 to 277 V AC; 0 to 10 V dimming
Ports 12 V SELV, 3 W total; 2.5 W above 50 C inside
Relay normally closed: lamp on if the controller fails
Mass: controller 0.33 kg, head 0.42 kg (LPN-CAL-001)
PRELIMINARY, NOT FOR FABRICATION

LAMPNODE

github.com/BoujeeEnjinia1701/lampnode

General arrangement, controller and sensor head

DRAWING NO. LPN-DWG-001			REV P3	SHEET 1 of 1	SIZE ANSI B
SCALE 1:5	UNITS mm	PROJECTION 	DATE 2026-09-30		DRAWN Amish Chadha
MATERIAL / NOTES Dome ASA; base and head box PC; clamps stainless; bracket 2 mm Al. See bom/bom.csv					
Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com					Generated from cad/src; do not edit by hand