


CONCEPT, NOT FOR FABRICATION

| REV | DESCRIPTION   | DATE       | BY |
|-----|---------------|------------|----|
| P1  | Concept sheet | 2026-09-25 | AC |




TOP VIEW  
Scale 1:5

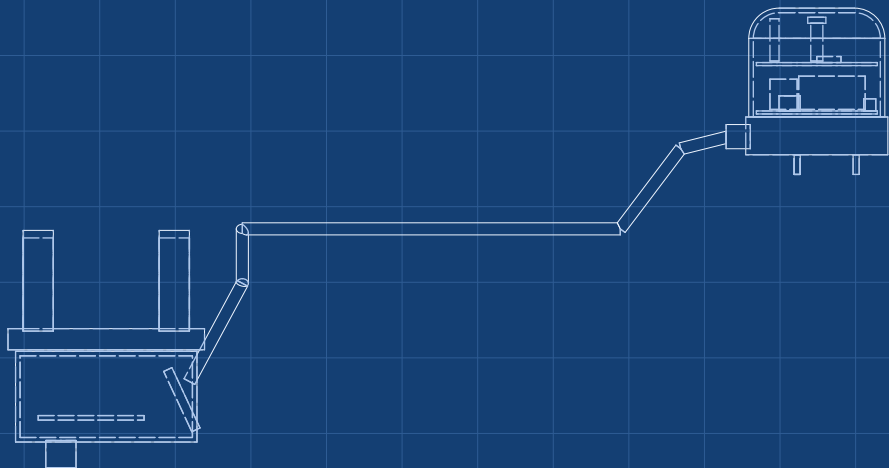

FRONT VIEW  
Scale 1:5



RIGHT VIEW  
Scale 1:5

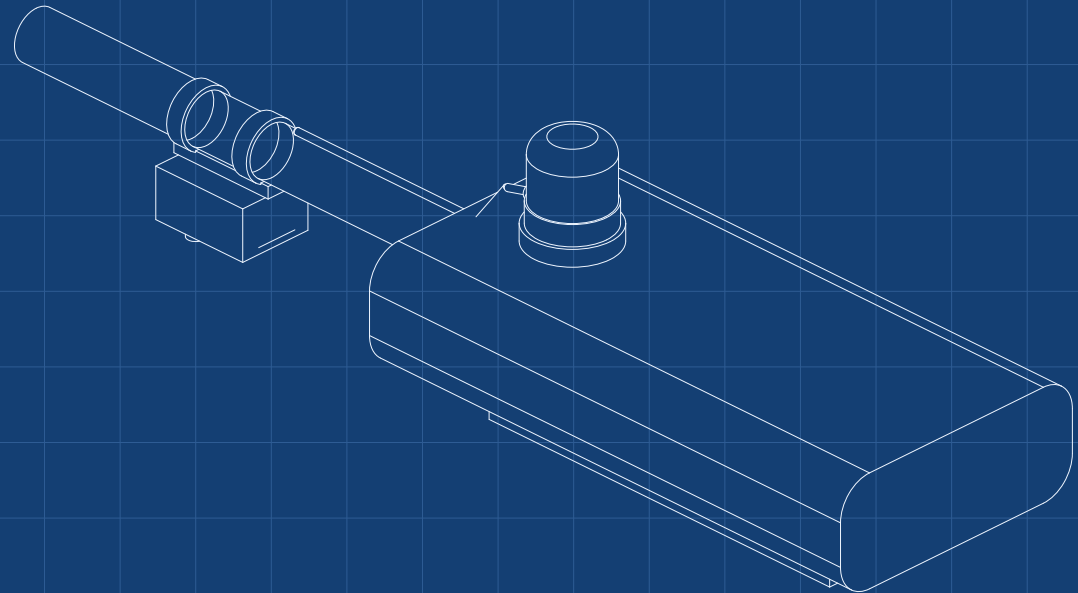

ISOMETRIC VIEW  
Not to scale; grey is for scale

KEY FIGURES

Plugs into ANSI C136.41 7-contact receptacle (proposed)  
120 to 277 V AC; 0 to 10 V dimming; fails on at night  
100 W luminaire: about 243 kWh/yr vs 410 (estimate)  
24 GHz radar: presence only, no images or audio  
LoRaWAN; about \$124 in parts (indicative)

LAMPNODE

Streetlight controller concept

|                            |             |                                                                                                     |                    |                       |
|----------------------------|-------------|-----------------------------------------------------------------------------------------------------|--------------------|-----------------------|
| DRAWING NO.<br>LPN-DWG-010 |             | REV<br>P1                                                                                           | SHEET<br>1 of 1    | SIZE<br>ANSI B        |
| SCALE<br>1:5               | UNITS<br>mm | PROJECTION<br> | DATE<br>2026-09-25 | DRAWN<br>Amish Chadha |

MATERIAL / NOTES  
Massing model for concept communication