



CONCEPT, NOT FOR FABRICATION


REV	DESCRIPTION	DATE	BY
P1	Preliminary GA from cad/src/model.py (LPN-CAL-001)	2026-09-25	AC

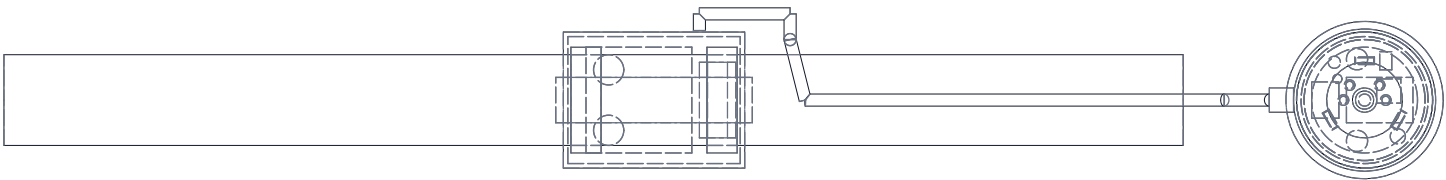


TOP VIEW
Scale 1:5

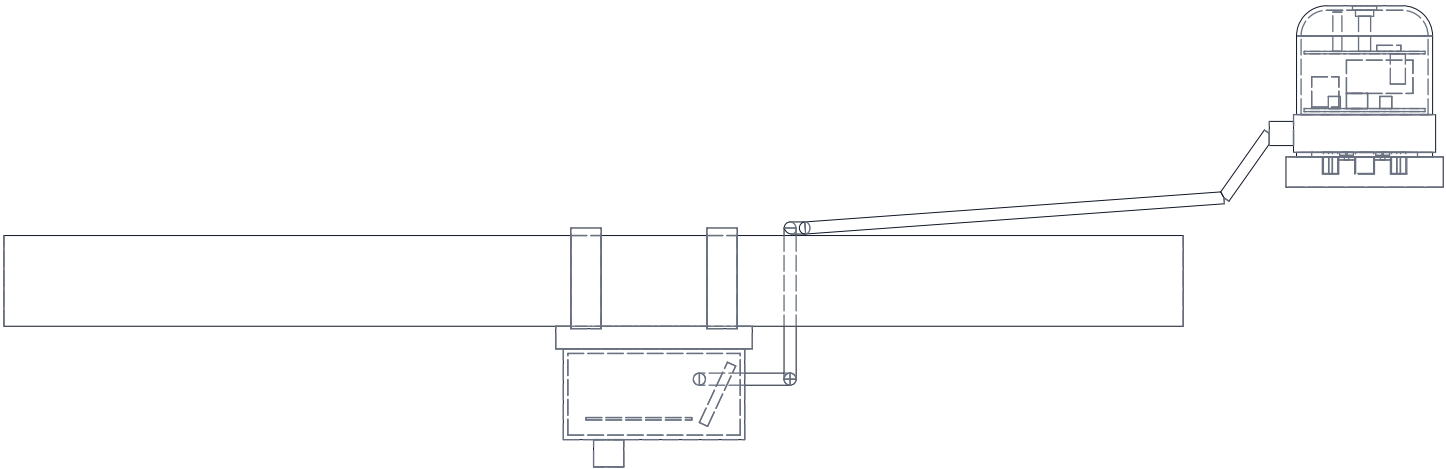

FRONT VIEW
Scale 1:5

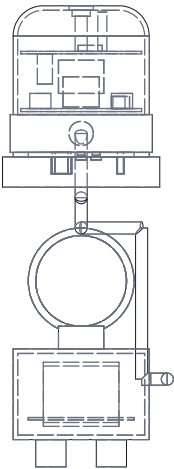

RIGHT VIEW
Scale 1:5

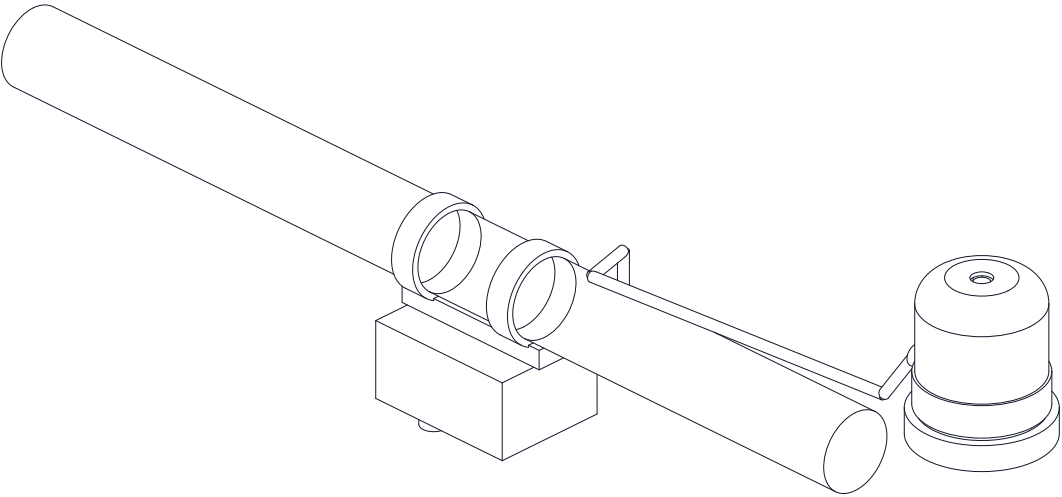

ISOMETRIC VIEW
Not to scale; grey = existing receptacle and arm

KEY DIMENSIONS AND INTERFACES (MM)

Controller 94 dia. x 111 incl. blades; dome 90 x 72
Base: ANSI C136.41 7-contact twist-lock (representative),
3 power blades, 4 low-voltage contacts, no earth
Sensor head 120 x 90 x 60, center 470 from
receptacle toward the pole; 15 below a 60 dia. arm
Radar tilted 25 deg down, looking along the street
M12 5-pole: base to head, 1 m cable; 2 ports under head
Band clamps for 50 to 80 arms, pitch 90
Mains 120 to 277 V AC; 0 to 10 V dimming; 12 V SELV 3 W
Relay normally closed: lamp on if the controller fails
Mass: controller 0.34 kg, head 0.45 kg (LPN-CAL-001)
PRELIMINARY, NOT FOR FABRICATION

LAMPNODE

General arrangement, controller and sensor head

DRAWING NO. LPN-DWG-001			REV P1	SHEET 1 of 1	SIZE ANSI B
SCALE 1:5	UNITS mm	PROJECTION 	DATE 2026-09-25		DRAWN Amish Chadha
MATERIAL / NOTES Dome ASA; base and head box PC; clamps stainless; bracket Al. See bom/bom.csv					
Licensed CERN-OHL-S-2.0 · Open Hardware Portfolio · amishchadha.com				Generated from cad/src; do not edit by hand	