



CONCEPT, NOT FOR FABRICATION

REV	DESCRIPTION	DATE	BY
P1	Preliminary GA from LDZ-CAL-001 v0.1	2026-09-25	AC
P2	Epoxy bed; notes per LDZ-DDR-002	2026-09-25	AC

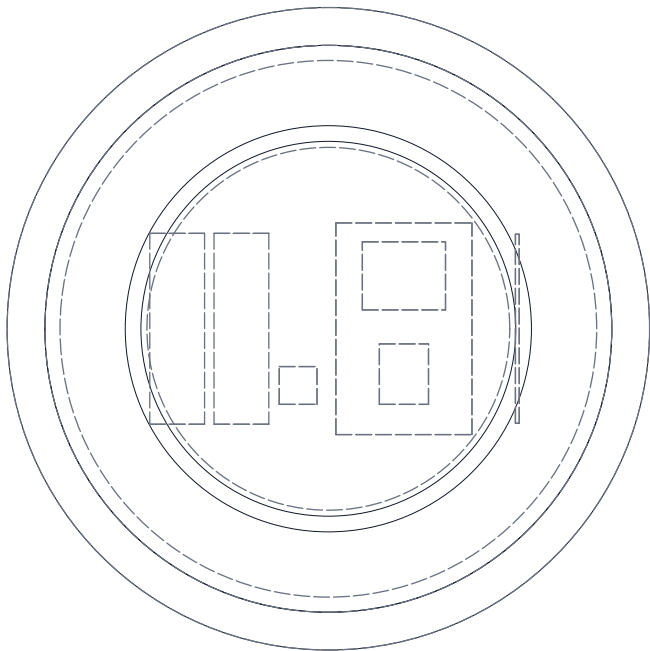


TOP VIEW
Scale 1:2



FRONT VIEW
Scale 1:2



RIGHT VIEW
Scale 1:2

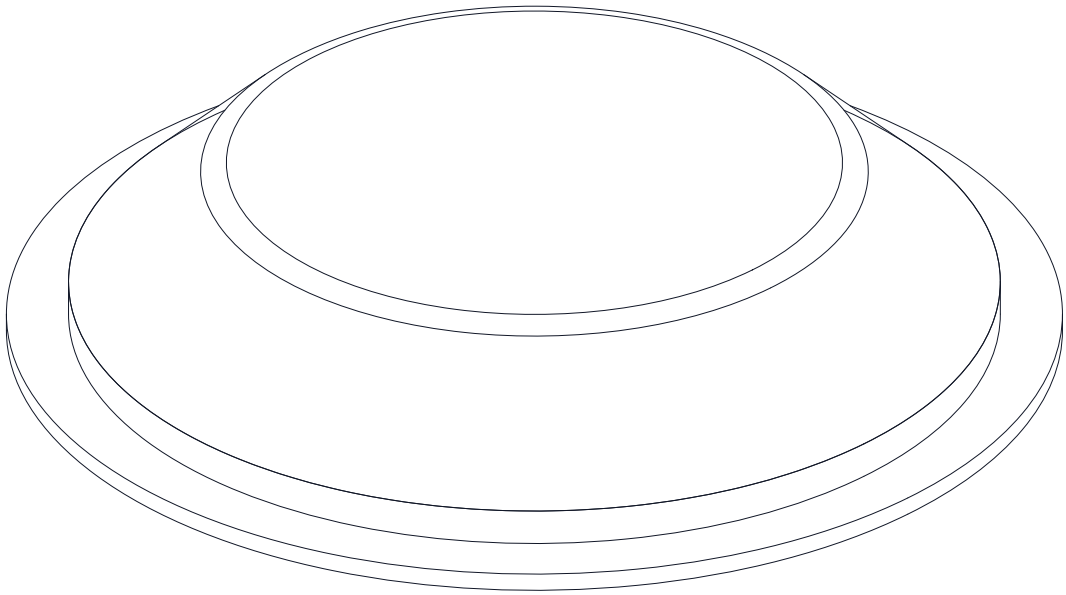

ISOMETRIC VIEW
Not to scale

KEY DIMENSIONS AND INTERFACES (MM)

Height 31 above road: pad 3, base 6, dome 22
Base dia 150; pad dia 170; crown dia 104
Dome wall 4; crown radius 6; cavity fully potted
Cells 2 x AA Li-SOCl2 (14.5 x 50.5), Schottky per cell
Magnetometer on the carrier, sensing axis Z up
Antenna at the +X dome edge; no metal above it
Placement: slot center, 1.3 m from curb face,
one puck per 7 m slot, clear of bike lanes
Bond: two-part road-marker epoxy bed
Crown 7.4 MPa at a 49 kN wheel (LDZ-CAL-001 F)
Gateway within 300 m of the bay (R4)
Mass about 0.45 kg without pad
Road work only under permit and traffic control
PRELIMINARY, NOT FOR FABRICATION

LOADZONE

General arrangement, bay sensor puck

DRAWING NO. LDZ-DWG-001			REV P2	SHEET 1 of 1	SIZE ANSI B
SCALE 1:2	UNITS mm	PROJECTION 	DATE 2026-09-25		DRAWN Amish Chadha
MATERIAL / NOTES Dome rigid cast PU, yellow; PU potting; ASA base; two-part road-marker epoxy bed. See bom/bom.csv					
Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com					Generated from cad/src; do not edit by hand