


REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-10-01	AC




TOP VIEW
Scale 1:1; looking down (along -Z)

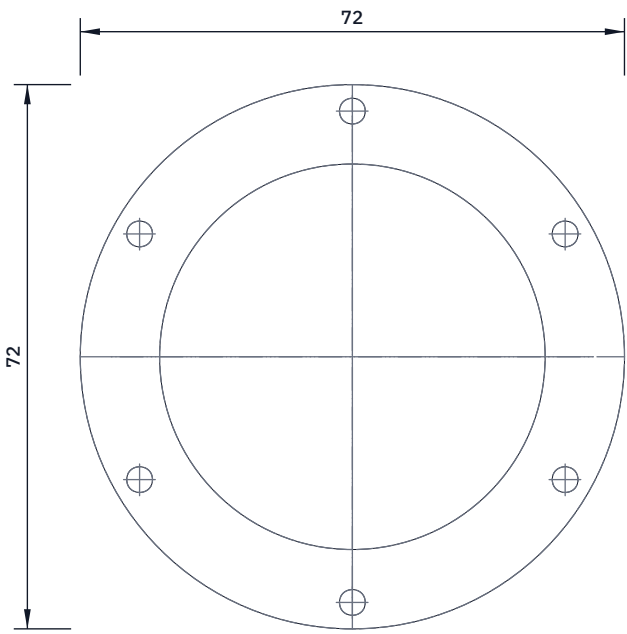

FRONT VIEW
Scale 1:1; looking at the front (along +Y)



RIGHT VIEW
Scale 1:1; looking at the right side (along -X)

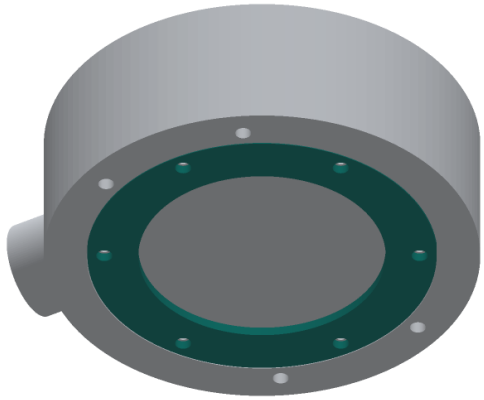

WHERE IT GOES
This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

Laser cut a ring 72 outside dia, 51 inside dia, from 2 mm 316.

Six 3.4 mm holes on a 65 dia circle, every 60 deg starting at 30 deg; countersink them 90 deg on the bottom (LED) face so M3 countersunk screws sit flush.

Lap the top face flat on fine paper on glass: the quartz window sits on it, metal to glass, and must bear evenly.

Break the inside edge 0.3 mm. Passivate.

Fit: it sits in the 72.4 recess in the cap's bottom face, flush with that face. Six M3 x 8 screws into the cap, tightened evenly in a cross pattern to about 0.5 N m.

The 51 mm bore is the window's open span used in the stress calculation; do not open it out.

Check: flat within 0.05 mm across a straight edge.

LUMAFLOW

github.com/BoujeeEnjinia1701/lumaflow

LumaFlow window retaining ring: making sketch

DRAWING NO. LMF-DWG-104			REV P1	SHEET 1 of 1	SIZE ANSI B
SCALE 1:1	UNITS mm	PROJECTION 	DATE 2026-10-01		DRAWN Amish Chadha
MATERIAL / NOTES 316 stainless sheet 2 mm; laser cut					
Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com					Generated from cad/src; do not edit by hand