
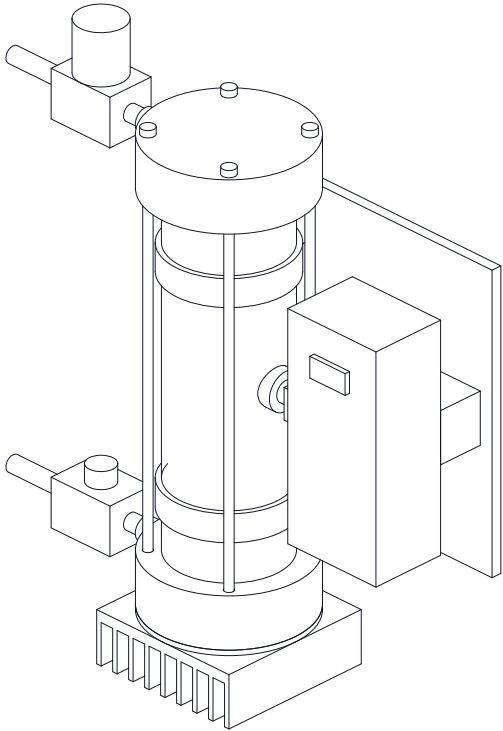


CONCEPT, NOT FOR FABRICATION

LumaFlow · github.com/BoujeeEnjinia1701/lumaflow

REV	DESCRIPTION	DATE	BY
P1	Preliminary GA for TRL 3 (from cad/src/model.py)	2026-09-25	AC
P2	50 mm bore, wall dose sensor, M5 rods (LMF-DDR-002)	2026-09-25	AC
P3	Layout and labels tidied	2026-09-30	AC

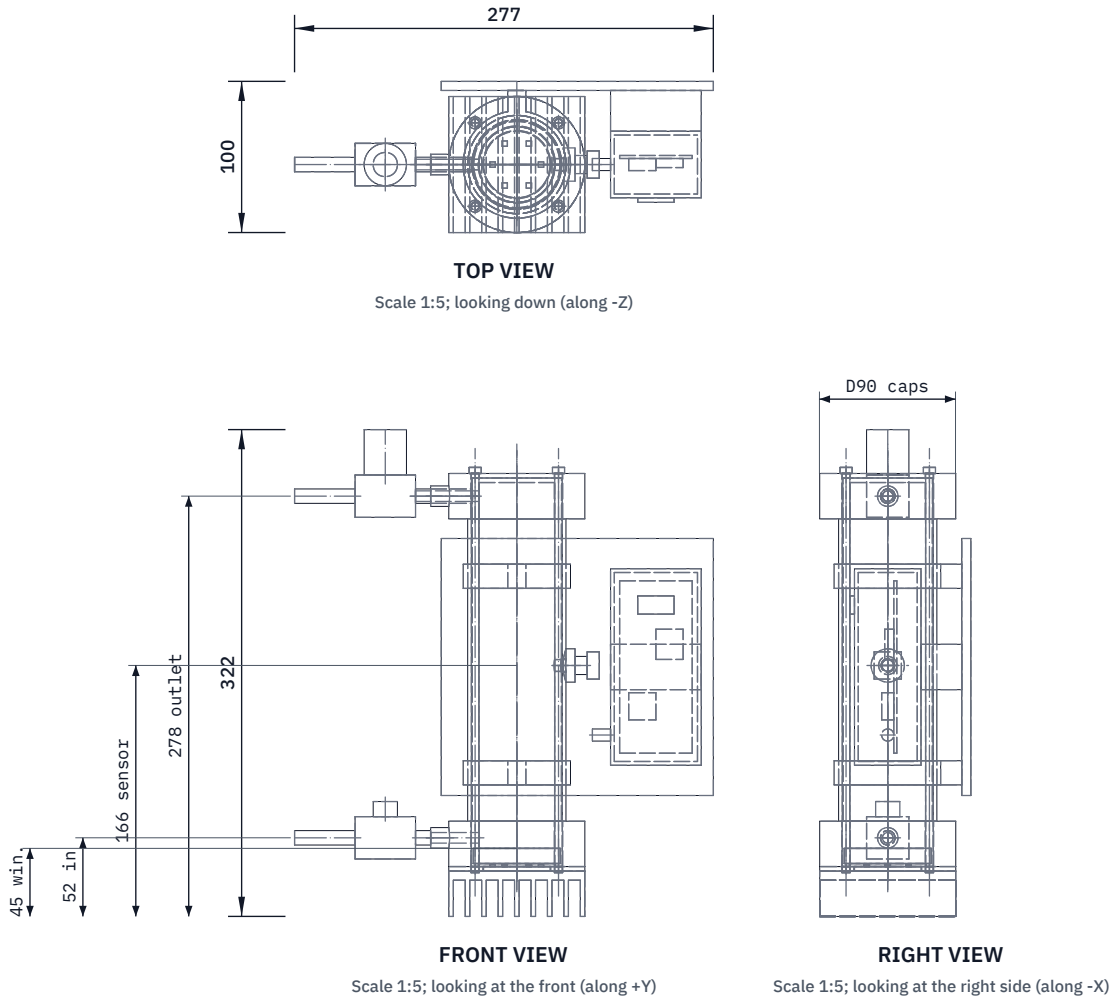

Not to scale; adapter not shown; seen from the front right and above, about 30 deg elevation

MAIN DIMENSIONS AND INTERFACES (MM)

- Unit 277 W x 100 D x 322 H, adapter excluded
- Channel D50 x 242; ports at Z 52 and 278
- Dose sensor D8 window in tube wall at Z 166, facing +X
- Tube D65 x 3 wall x 200, 316; high-refl. PTFE liner D59
- Window D57 x 10 fused silica on a D51 seat
- 6 x 275 nm LEDs on a 32 mm circle, 0.8 mm below window
- Caps D90 x 30; 4 x M5 316 tie rods on D78
- Ports 3/8 in push-fit; outlet through a 316 insert
- Heat sink 90 x 90 x 30, fins down
- Working pressure 8 bar; limiter at 4 bar upstream; flow up
- Third-angle; front view from -Y, right view from +X

LUMAFLOW

github.com/BoujeeEnjinia1701/lumaflow

General arrangement

DRAWING NO. LMF-DWG-001			REV P3	SHEET 1 of 1	SIZE ANSI B
SCALE 1:5	UNITS mm	PROJECTION 	DATE 2026-09-25		DRAWN Amish Chadha
MATERIAL / NOTES 316 tube and lower cap, high-reflectance PTFE liner, fused silica window, acetal upper cap; see bom/bom.csv. PRELIMINARY, NOT FOR FABRICATION					
Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com					Generated from cad/src; do not edit by hand