


REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-10-01	AC



TOP VIEW

Scale 1:2; looking down (along -Z)




FRONT VIEW

Scale 1:2; looking at the front (along +Y)



RIGHT VIEW

Scale 1:2; looking at the right side (along -X)

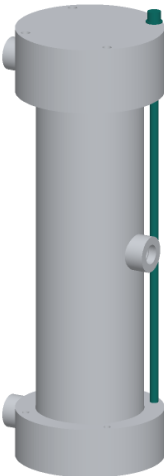

WHERE IT GOES

This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

Cut four 258 long from M5 A4 threaded rod; chamfer and dress both ends so a nut runs on by hand.

One end goes 12 into the lower cap's tapped holes with a drop of medium threadlocker; run it in with two nuts locked together, then remove the nuts.

The other end passes through the upper cap and carries a 10 mm washer and an M5 acorn nut.

Tighten the four acorn nuts evenly, a quarter turn at a time, until both tube ends are down on their seats, then to about 2 N m. Do not over-tighten: the upper cap is acetal.

Check: all four studs stand 246 above the lower cap's top face.

LumaFlow tie rod stud (make 4): making sketch

DRAWING NO. LMF-DWG-109			REV P1	SHEET 1 of 1	SIZE ANSI B
SCALE 1:2	UNITS mm	PROJECTION 	DATE 2026-10-01		DRAWN Amish Chadha
MATERIAL / NOTES M5 threaded rod, A4 (316) stainless					
Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com				Generated from cad/src; do not edit by hand	