



CONCEPT, NOT FOR FABRICATION

| REV | DESCRIPTION                                      | DATE       | BY |
|-----|--------------------------------------------------|------------|----|
| P1  | Preliminary GA for TRL 3 (from cad/src/model.py) | 2026-09-25 | AC |

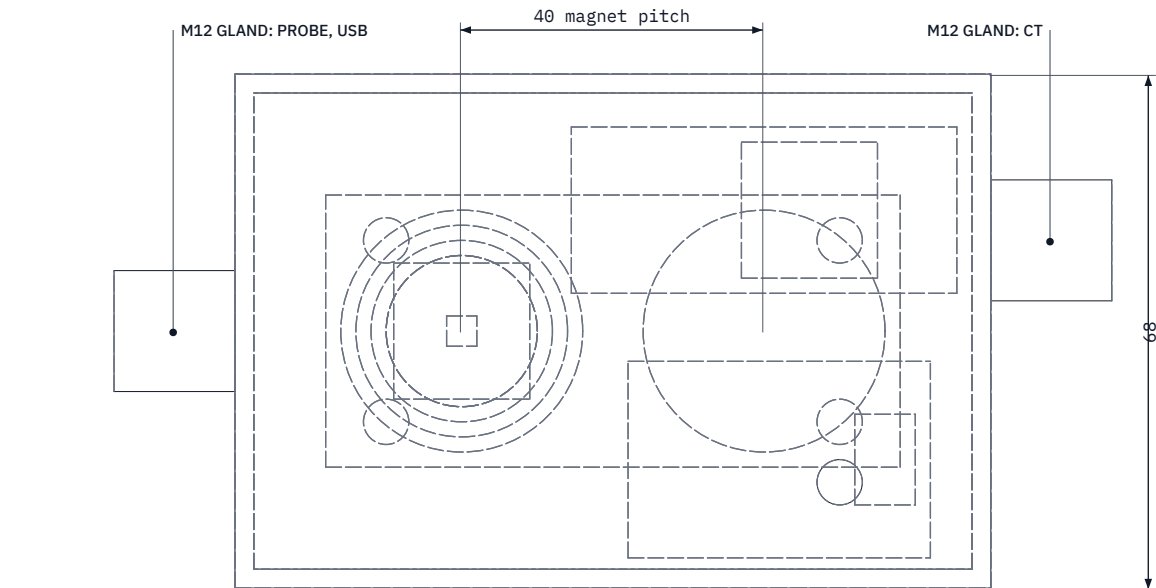


TOP VIEW

Scale 1:1

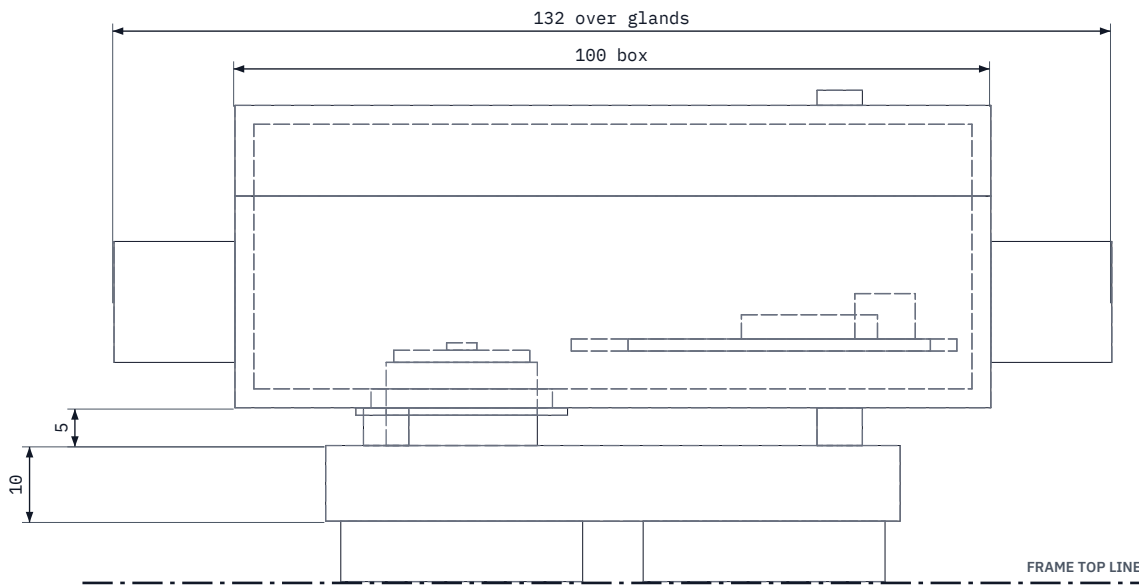


FRONT VIEW

Scale 1:1

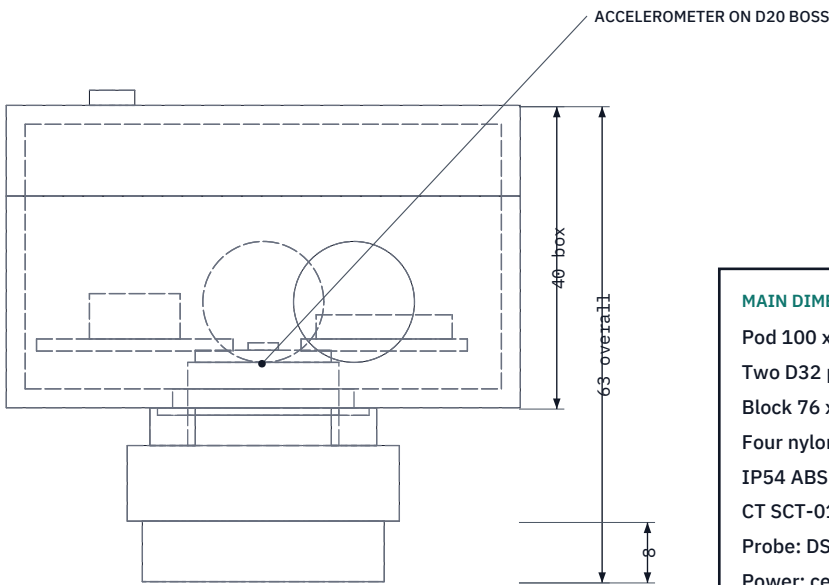

RIGHT VIEW

Scale 1:1

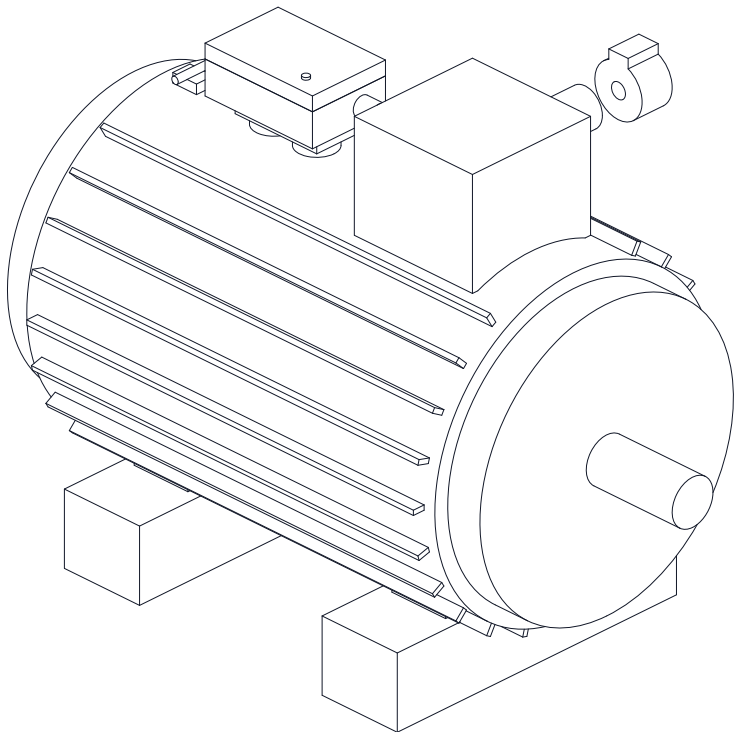

ISOMETRIC VIEW, INSTALLED

Not to scale; motor grey context, not in the BOM

MAIN DIMENSIONS AND INTERFACES (MM)

Pod 100 x 68 x 63 high from magnet face; 132 over glands

Two D32 pot magnets, M6 studs, 40 pitch on the frame top line

Block 76 x 36 x 10 aluminium; boss D20 x 11 through a D24 hole

Four nylon stand-offs D6 x 5; silicone boot seals the boss

IP54 ABS box, base 28 + lid 12; boards on 5 stand-offs

CT SCT-013 class, D13 aperture, one insulated conductor

Probe: DS18B20 sleeve D6 in a magnetic clip near a bearing

Power: certified 5 V USB adapter, 2 m lead; 0.42 W (MPL-CAL-001)

Third-angle; front view from -Y; X along the motor shaft

MACHINEPULSE

General arrangement

|                                       |                    |                                                                                                     |                           |                              |
|---------------------------------------|--------------------|-----------------------------------------------------------------------------------------------------|---------------------------|------------------------------|
| DRAWING NO.<br><b>MPL - DWG - 001</b> |                    | REV<br><b>P1</b>                                                                                    | SHEET<br><b>1 of 1</b>    | SIZE<br><b>ANSI B</b>        |
| SCALE<br><b>1:1</b>                   | UNITS<br><b>mm</b> | PROJECTION<br> | DATE<br><b>2026-09-25</b> | DRAWN<br><b>Amish Chadha</b> |

MATERIAL / NOTES  
ABS box, 6061 block, nylon stand-offs; bought-in parts per bom/bom.csv. PRELIMINARY, NOT FOR FABRICATION