



CONCEPT, NOT FOR FABRICATION

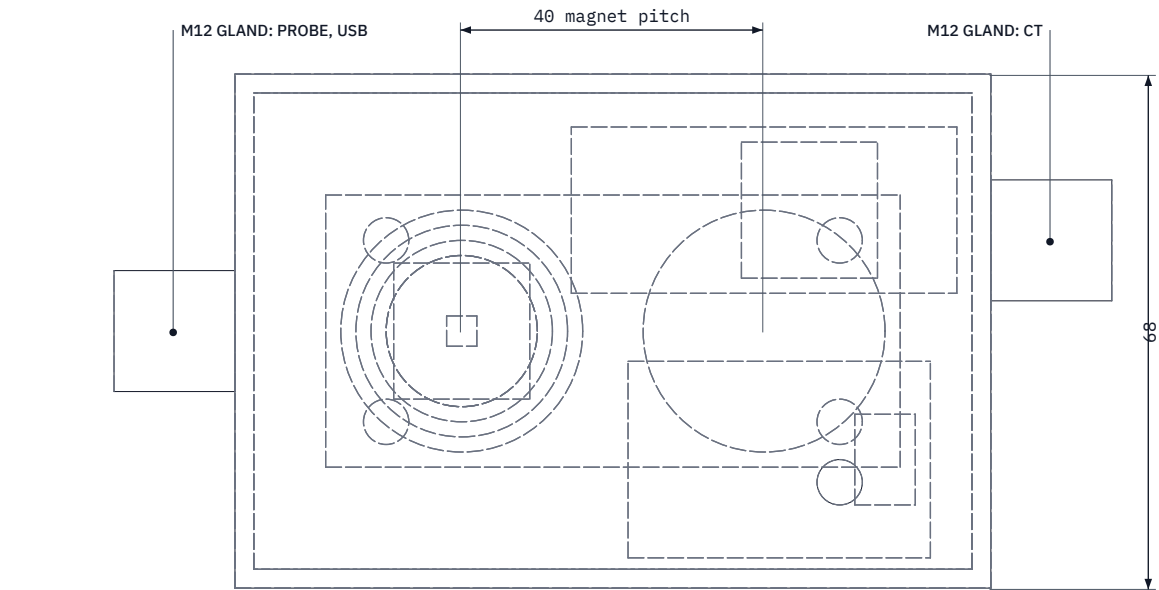


TOP VIEW

Scale 1:1

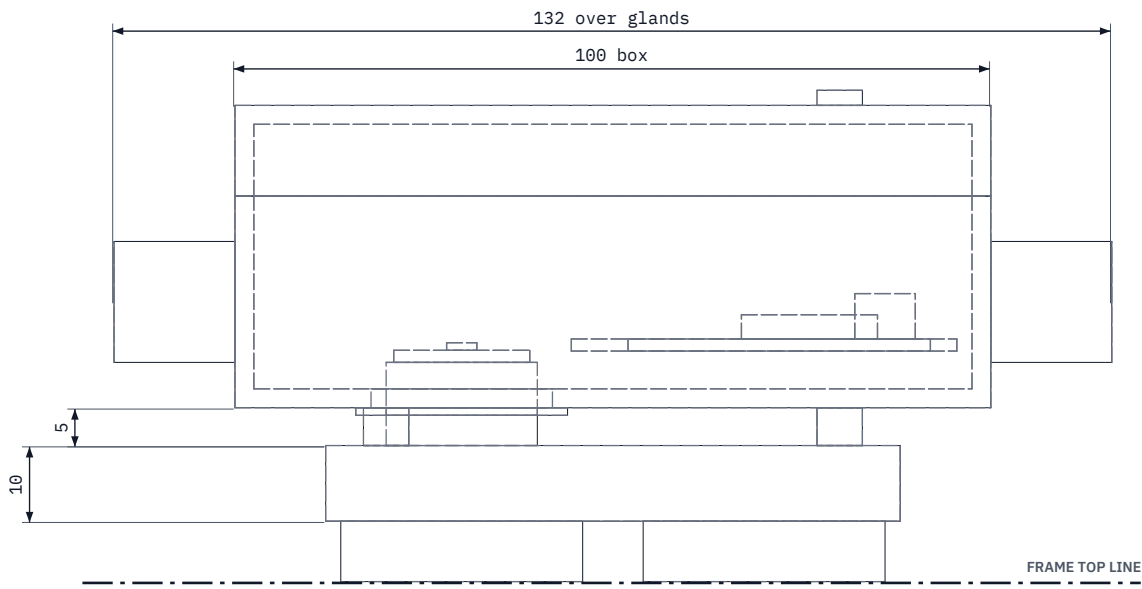


FRONT VIEW

Scale 1:1

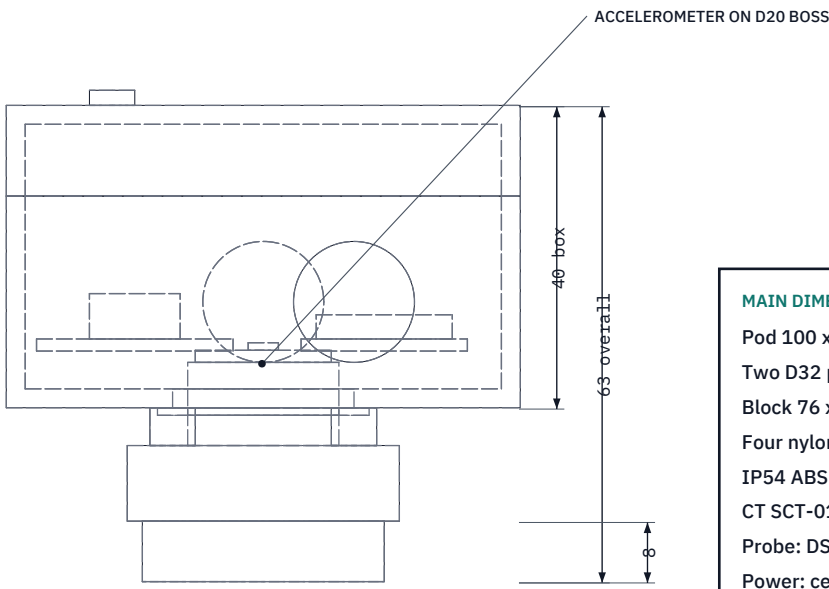

RIGHT VIEW

Scale 1:1

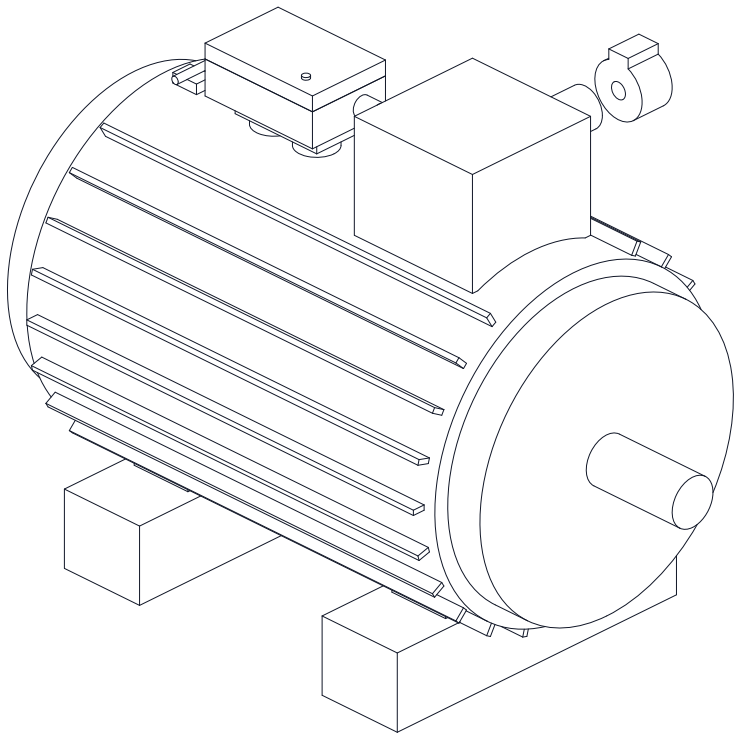

ISOMETRIC VIEW, INSTALLED

Not to scale; motor grey context, not in the BOM

MAIN DIMENSIONS AND INTERFACES (MM)

Pod 100 x 68 x 63 high from magnet face; 132 over glands

Two D32 pot magnets rated 120 °C, M6 studs, 40 pitch

Block 76 x 36 x 10 aluminium; boss D20 x 11 through a D24 hole

Four nylon stand-offs D6 x 5; silicone boot seals the boss

IP54 ABS box, base 28 + lid 12; boards on 5 stand-offs

CT SCT-013 class, D13 aperture, one insulated conductor

Probe: DS18B20 sleeve D6 in a magnetic clip near a bearing

Power: certified 5 V USB adapter, 2 m lead; 0.42 W (MPL-CAL-001)

Third-angle; front view from -Y; X along the motor shaft

MACHINEPULSE

General arrangement

DRAWING NO.

MPL - DWG - 001

REV

P2

SHEET

1 of 1

SIZE

ANSI B

SCALE

1:1

UNITS

mm

PROJECTION



DATE

2026-09-25

DRAWN

Amish Chadha

MATERIAL / NOTES

ABS box, 6061 block, nylon stand-offs; bought-in parts per bom/bom.csv. PRELIMINARY, NOT FOR FABRICATION