



REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-10-01	AC




TOP VIEW

Scale 1:5; looking down (along -Z)

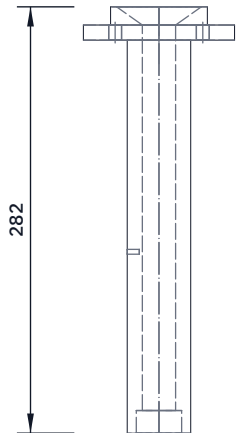

FRONT VIEW

Scale 1:5; looking at the front (along +Y)

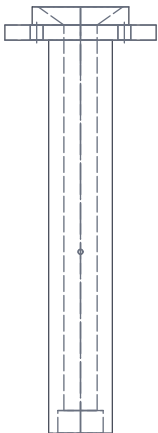

RIGHT VIEW

Scale 1:5; looking at the right side (along -X)



WHERE IT GOES

This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

A machine shop part. The tube is 42 mm bar, 260 mm long, bored and honed to 22 mm H8 right through; the flange and funnel collar may be turned from 100 mm bar and welded on, then the bore finish-honed.

Flange 100 mm across, 10 mm thick, at the top of the tube; four 8.5 mm holes on an 82 mm circle at 45 degrees to the front.

Funnel 64 mm across, 12 mm above the flange; cone from 56 to 22 mm.

Lower end: M30 x 1.5 thread, 15 mm deep, for the nozzle; face square.

Thermocouple well: 3.2 mm, 8 mm deep, on the left side, 120 mm above the lower end, between the two band heaters.

Fit: the flange sits on four mica pads on the shelf, held by four M8 cap screws; the tube passes the shelf hole with 2 mm all round.

Check: the plunger slides through the whole bore by hand, cold.

MICROMOLD

github.com/BoujeeEnjinia1701/micromold

MicroMold barrel: making sketch (machine shop)

DRAWING NO. MMD-DWG-103			REV P1	SHEET 1 of 1	SIZE ANSI B
SCALE 1:5	UNITS mm	PROJECTION 	DATE 2026-10-01		DRAWN Amish Chadha
MATERIAL / NOTES Steel bar 42 mm and 100 mm, C45 or 1045					
Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com					Generated from cad/src; do not edit by hand