



REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-10-01	AC




TOP VIEW

Scale 1:1; looking down (along -Z)

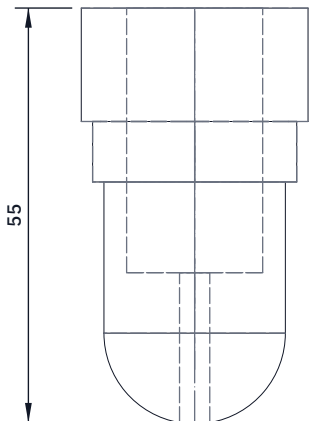


FRONT VIEW

Scale 1:1; looking at the front (along +Y)

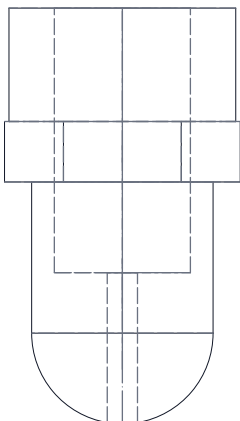

RIGHT VIEW

Scale 1:1; looking at the right side (along -X)

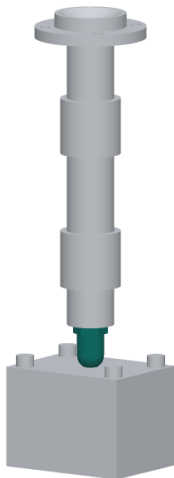

WHERE IT GOES

This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

A lathe part, from 32 mm steel bar.
Tip: 12 mm spherical radius, 24 mm across where it meets the body.
Body 24 mm across, 20 mm long, for the 100 W nozzle heater band.
Hex 27 mm across the flats, 8 mm long, for a spanner.
Spigot: M30 x 1.5 thread, 15 mm long, above the hex.
Orifice 4 mm, 20 mm deep from the tip; then 18 mm bore through the rest, so melt meets no step bigger than 2 mm.
Fit: screws into the barrel's lower end with copper anti-seize until the hex face is tight on the barrel face; the bores line up.
The tip seats in the mold's 12.5 mm spherical seat; it touches at the centre, around the sprue.
Check: blow through it; the tip has no burr or flat.

MICROMOLD

github.com/BoujeeEnjinia1701/micromold

MicroMold nozzle: making sketch (machine shop)

DRAWING NO. MMD-DWG-104			REV P1	SHEET 1 of 1	SIZE ANSI B
SCALE 1:1	UNITS mm	PROJECTION 	DATE 2026-10-01		DRAWN Amish Chadha
MATERIAL / NOTES Steel bar 32 mm, C45 or 1045					
Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com					Generated from cad/src; do not edit by hand