



REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-10-01	AC

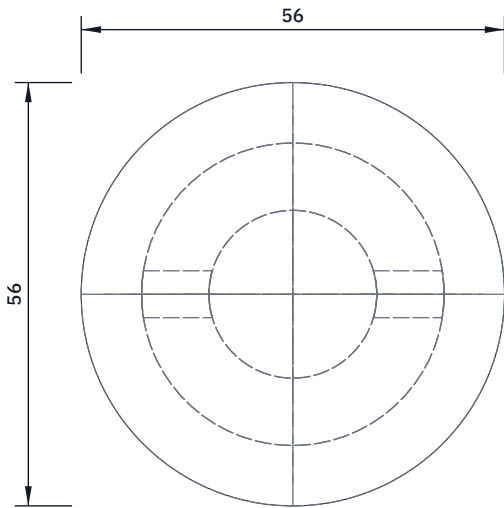


TOP VIEW

Scale 1:1; looking down (along -Z)

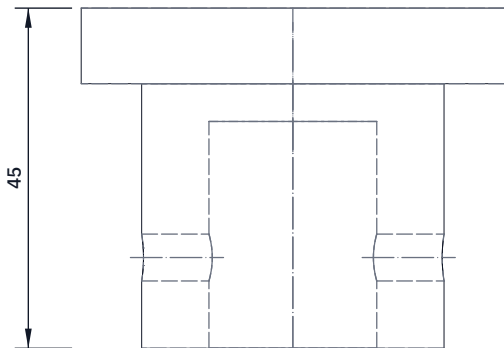


FRONT VIEW

Scale 1:1; looking at the front (along +Y)

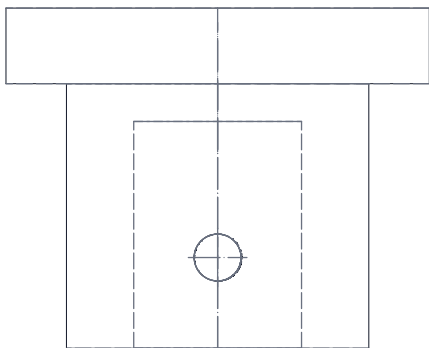

RIGHT VIEW

Scale 1:1; looking at the right side (along -X)

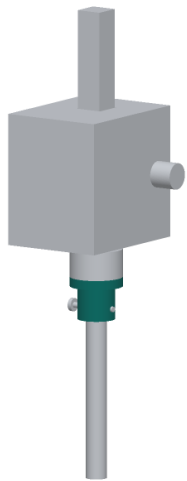

WHERE IT GOES

This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

Coupling: cut 35 mm of 40 mm steel bar, faces square (drill press).
Drill a 22.2 mm hole 30 mm deep in one face (step up from 10 mm).
Cross drill 6.2 mm through the centre, 12 mm from that face.
In the other face drill and tap three M5 holes 8 deep on a 28 mm circle.
Spacer: cut a 56 mm disc from 10 mm G-11. Three 5.5 mm holes on a 28 mm circle, counterbored 10 mm across and 4 deep from the top face.
Three M5 holes tapped 6 deep in the top face, on the circle of the load cell's flange holes (46 mm assumed), 60 degrees from the others.
Fit: three M5 x 12 low-head screws hold the coupling under the spacer, heads 1 mm below its top; three M5 screws through the cell's flange into the spacer. No screw crosses the spacer.
Check: no metal path from the coupling to the cell.

MICROMOLD

github.com/BoujeeEnjinia1701/micromold

MicroMold plunger coupling and thermal spacer: making sketch

DRAWING NO. MMD-DWG-107			REV P1	SHEET 1 of 1	SIZE ANSI B
SCALE 1:1	UNITS mm	PROJECTION 	DATE 2026-10-01		DRAWN Amish Chadha
MATERIAL / NOTES Steel bar 40 mm; glass-epoxy (G-11) sheet 10 mm					
Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com				Generated from cad/src; do not edit by hand	