
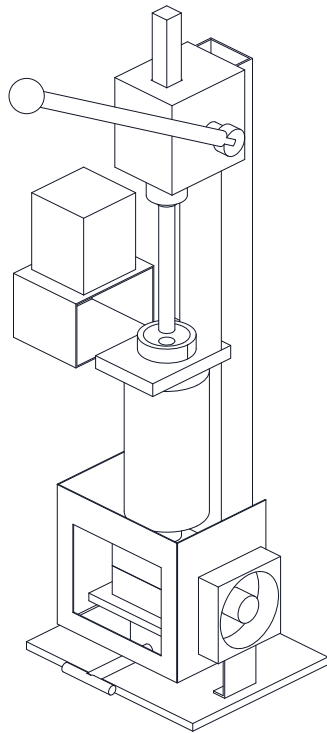
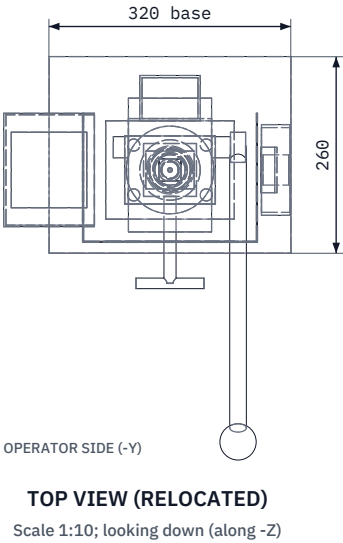


CONCEPT, NOT FOR FABRICATION

MicroMold · github.com/BoujeeEnjinia1701/micromold

REV	DESCRIPTION	DATE	BY
P1	Preliminary GA for TRL 3 (from cad/src/model.py)	2026-09-25	AC
P2	Mold cooling fan added; 300 W bands (MMD-DDR-002)	2026-09-25	AC
P3	Layout and labels tidied	2026-09-30	AC

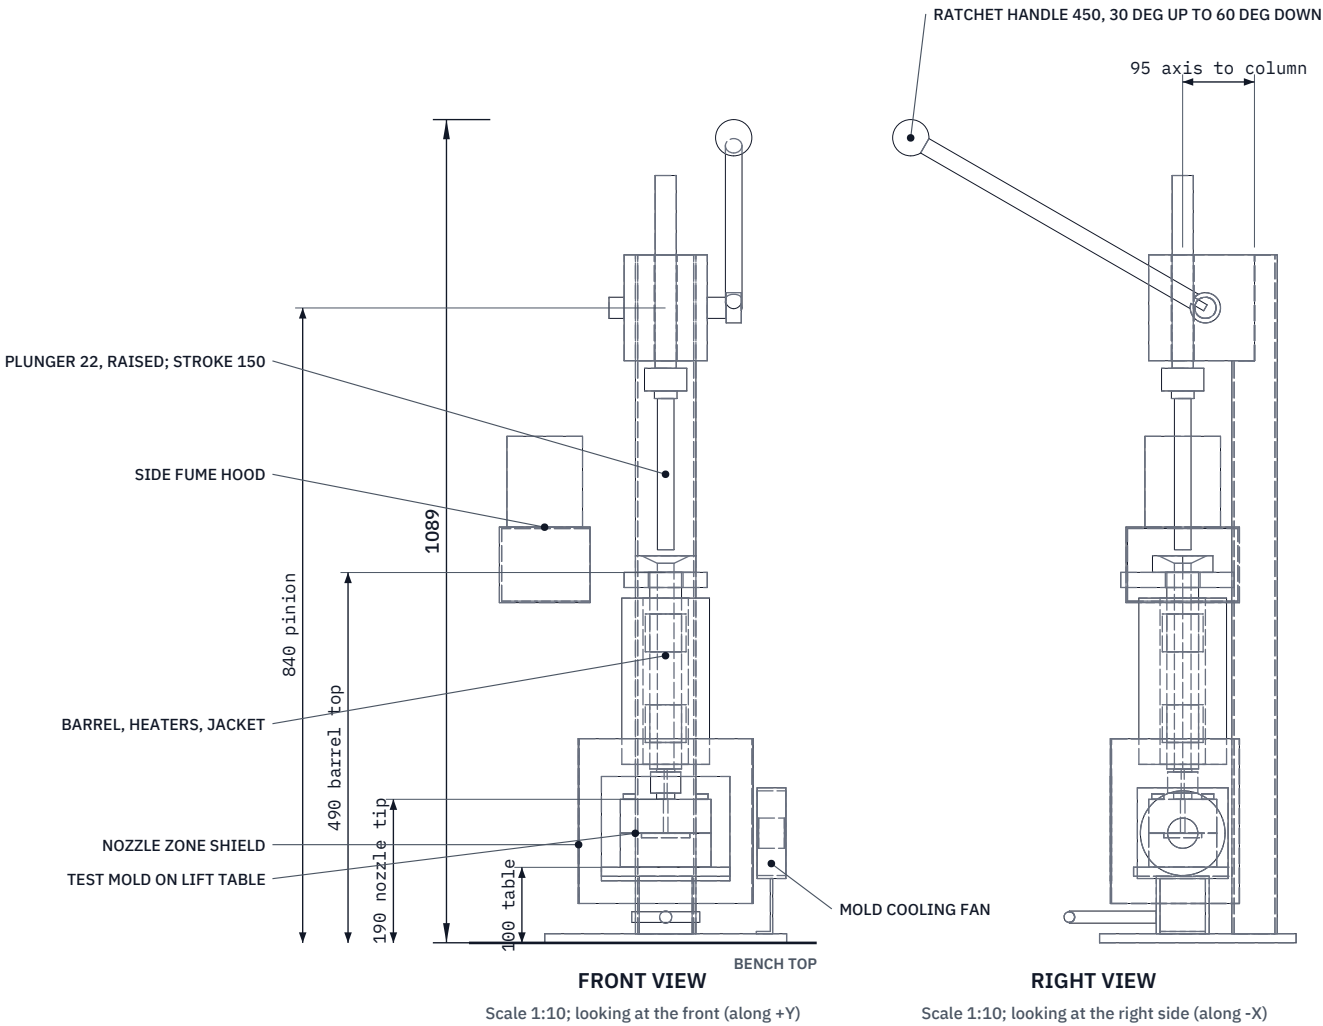

MAIN DIMENSIONS AND INTERFACES (MM)

- Barrel 42 OD, bore 22 (22 H8/f7 plunger fit), 260 long
- Flange 80 OD on 4 mica pads on a 20 mm bracket at 490
- Nozzle orifice 4; sprue 5 to 7 taper; tip at 190
- Stroke 150, 120 in the bore; ram 255 long, 28 square
- Pinion r 20; ratchet handle 450; 22.5:1
- Lift table 170 x 130, top 60 to 160; stack 30 to 120
- Test mold 120 x 90 x 90; four M10 8.8 at 20 kN
- Load cell 10 kN on a 10 mm G-11 thermal spacer
- Hood face 150 x 100, 100 from the axis; 100 duct
- Mold cooling fan 120 x 120 x 38 at X 140; barrel bands 2 x 300 W
- Third-angle; front view from -Y (operator side)

MICROMOLD

github.com/BoujeeEnjinia1701/micromold

General arrangement

DRAWING NO. MMD-DWG-001			REV P3	SHEET 1 of 1	SIZE ANSI B
SCALE 1:10	UNITS mm	PROJECTION 	DATE 2026-09-25		DRAWN Amish Chadha
MATERIAL / NOTES Steel frame and barrel; 6061 mold; bought-in parts per bom/bom.csv. PRELIMINARY, NOT FOR FABRICATION					
Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com				Generated from cad/src; do not edit by hand	