



Interpolation Chain - Derived Design

1000.0000 kHz x 125 = 125.000 MHz, split [5, 25], 200.000 kHz signal

Composite magnitude across the converter band

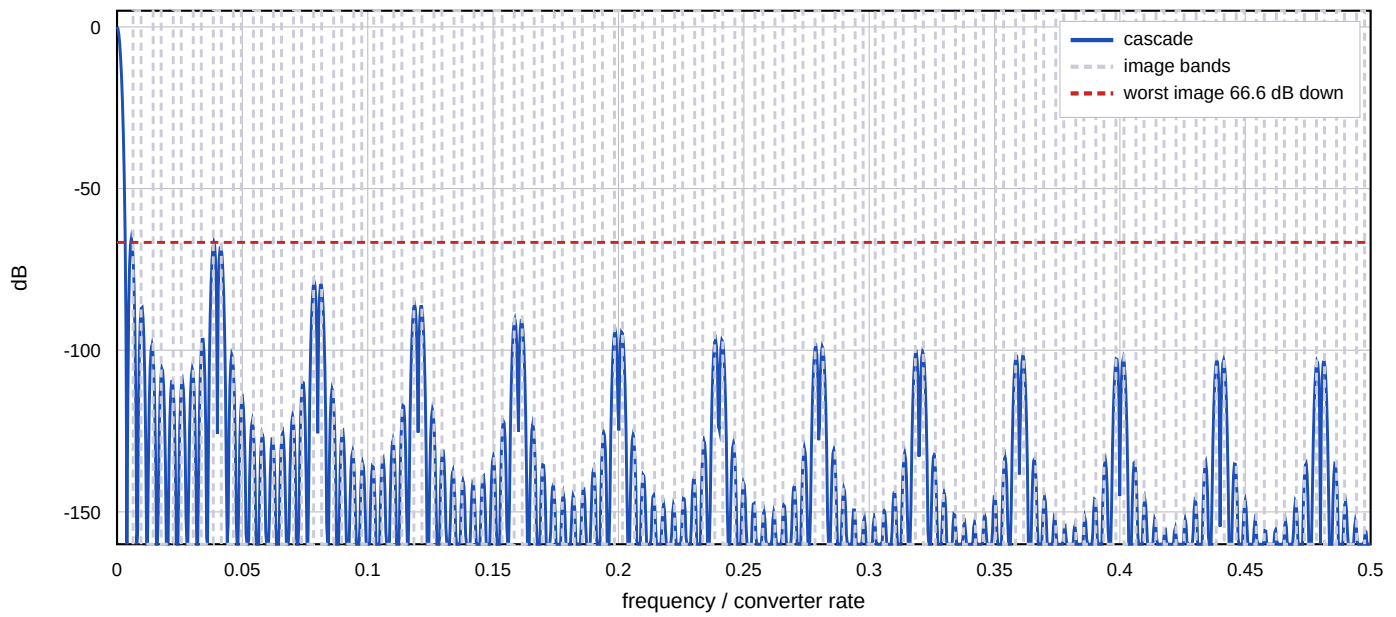

The signal and its first image

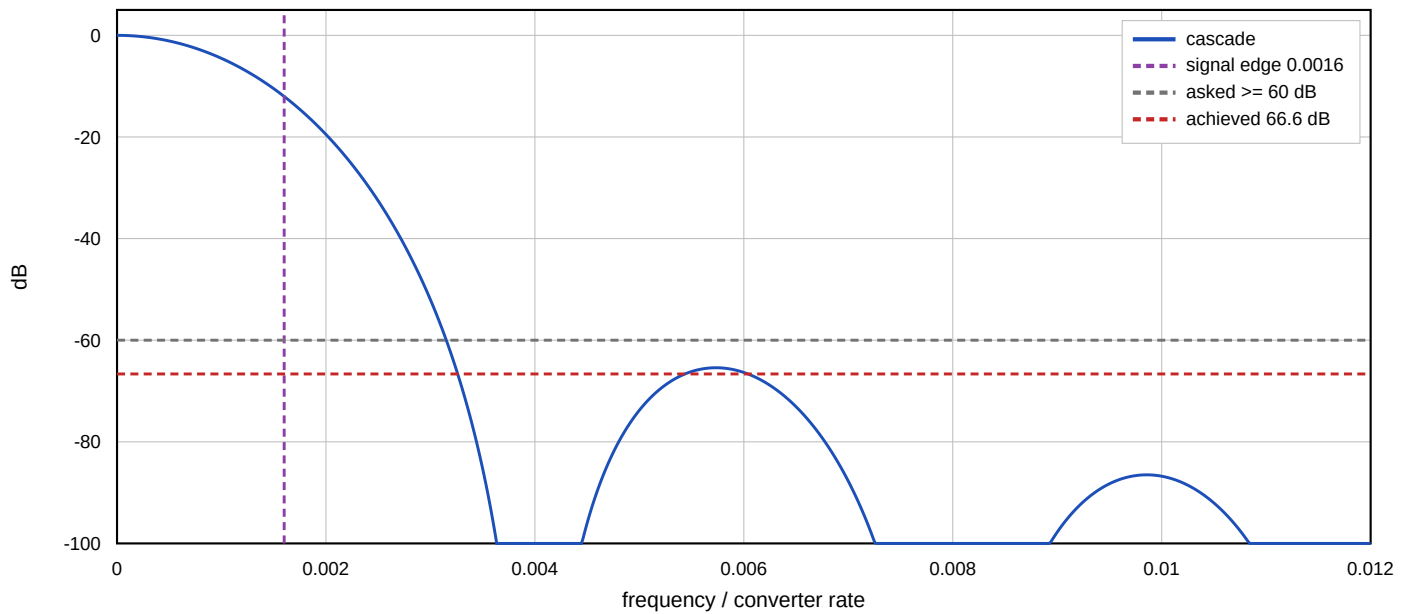

Stages

stage 1: x5 N=5 M=2 combs at 1.0000 MHz, integrators at 5.0000 MHz
in 16 bits, uniform accumulator 31 bits, tapered widths [17, 18, 19, 20, 21, 21, 24, 26, 28, 31]
620 register bits uniform, 415 as built (lossless), bound 415
widths as built [17, 18, 19, 20, 21, 21, 24, 26, 28, 31]


stage 2: x25 N=2 M=1 combs at 5.0000 MHz, integrators at 125.000 MHz
in 31 bits, uniform accumulator 36 bits, tapered widths [32, 33, 32, 36]
216 register bits uniform, 199 as built (lossless), bound 198
widths as built [32, 33, 33, 36]

The combs run at the stage's input rate and the integrators at its output rate, so an integrator bit costs R times what a comb bit costs. Depth belongs early and rate late. The tapered widths are lossless: each stage sized to its own growth bound holds its value exactly, so a tapered interpolator is bit-identical to a uniform one.


Compensation and Result

9 taps, 16-bit coefficients, at the 1.0000 MHz envelope rate

Droop, pre-compensator, and the two together - the signal band

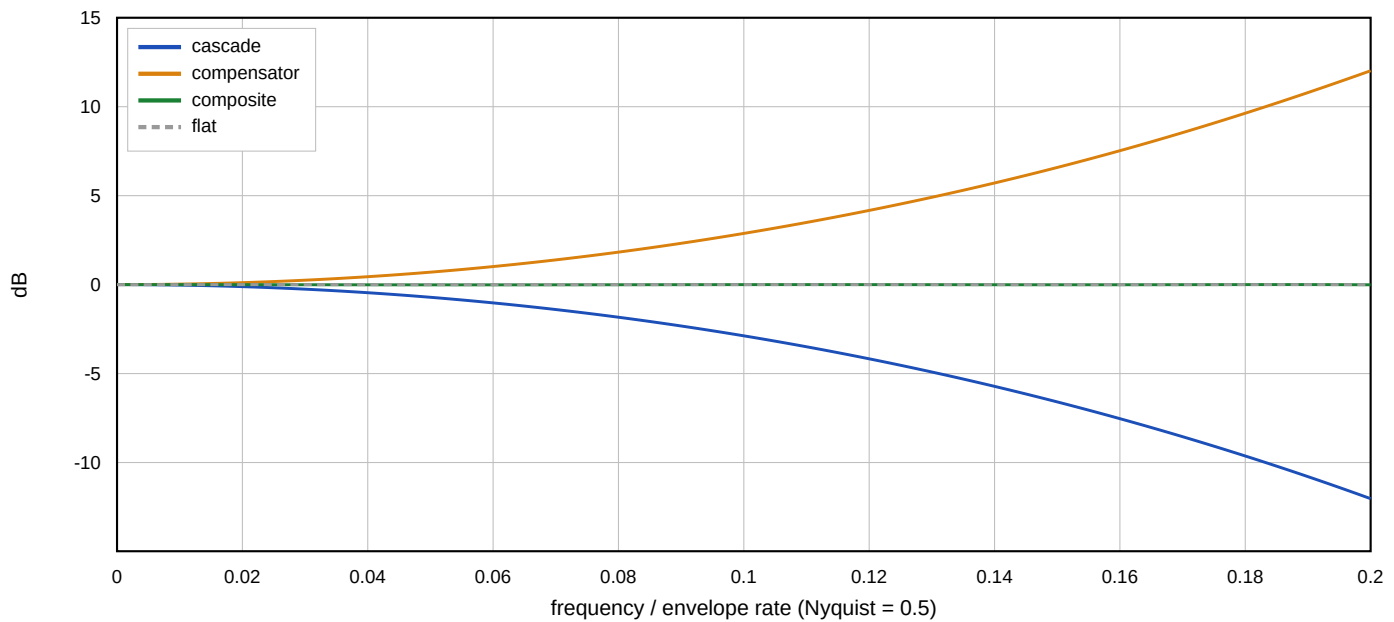

The compensator repeats, so it lifts every image as much as the signal

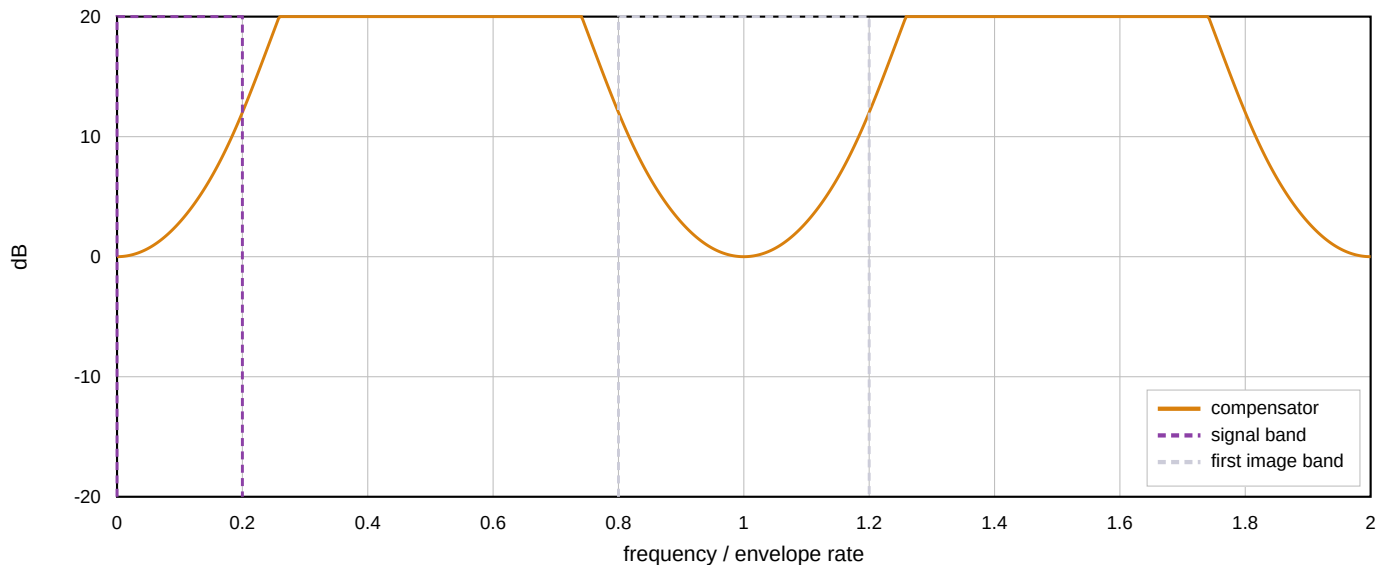

Figures

images 66.6 dB down (asked ≥ 60.0)
worst image at 4.8297 MHz
passband ripple 0.0147 dB (asked ≤ 0.100)
uncompensated droop .. -11.986 dB at the band edge
converter floor 86.0 dB at 14 bits (the chain adds none)
register bits 836 uniform, 614 as built, 613 at the exact bound
compensator DC gain .. 1.0000, shift 10
compensator headroom . 23 bits for any input, 18 for in-band only
norms l1 81.1289, passband peak 3.9907
rates reachable 73 of 124 in 2..=125 (a split restricts them)
worst image at rate .. 125
adder depth 5 deep in the combs, 1 in the integrators
runner-up split [5, 25] N=[5, 2] M=[2, 2], 924 register bits
taps [304, -2290, 8288, -18223, 24866, -18223, 8288, -2290, 304]

Build to the any-input headroom unless the envelope is band-limited.

The in-band figure is the peak gain an in-band sinusoid sees. The any-input figure is the sum of the taps' magnitudes, which is the bound for an arbitrary bounded input -- and a transmit envelope is not band-limited: switch-on, a burst boundary and a modulation change are all steps, and a step is exactly the input that reaches it. Choosing the narrower figure for a burst transmitter is how a compensator saturates on the first sample.

More taps will not improve image rejection