



REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-10-02	AC

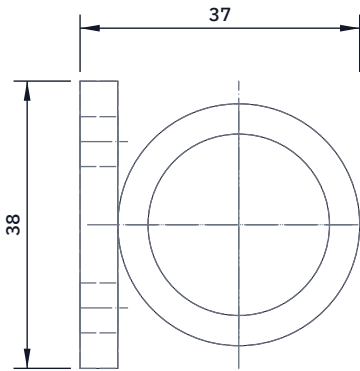


TOP VIEW

Scale 1:1; looking down (along -Z)

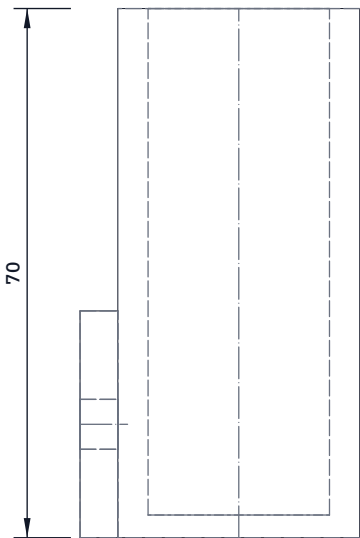

FRONT VIEW

Scale 1:1; looking at the front (along +Y)

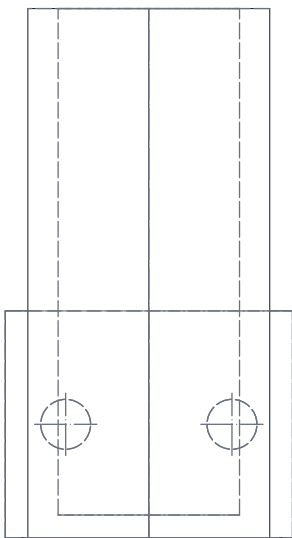

RIGHT VIEW

Scale 1:1; looking at the right side (along -X)



WHERE IT GOES

This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

Cut the plate 38 x 30 x 5 mm from flat bar. Drill two 6.6 mm holes 22 mm apart on its centre line, for M6 rivnuts in the column wall.

Cut the cup from 32 mm OD x 24 mm ID steel tube, 70 mm long; cut a 3 mm disc 32 mm across for its base and weld it all round.

Stand the cup on its base against the plate's outer face, flush with the plate's lower edge, and weld it along both sides of the contact line.

Fit: two M6 rivnuts in the column's right wall (see the column sketch), two M6 screws through the plate. The cup then leans out 61 mm from the wall.

Check: the plunger stands tip down in the cup, 67 mm deep, and cannot be knocked over by a push of the hand; the cup is clear of the shelf.

MICROMOLD

github.com/BoujeeEnjinia1701/micromold

MicroMold plunger rest: making sketch

DRAWING NO. MMD-DWG-115			REV P1	SHEET 1 of 1	SIZE ANSI B
SCALE 1:1	UNITS mm	PROJECTION 	DATE 2026-10-02		DRAWN Amish Chadha
MATERIAL / NOTES Steel flat bar, steel tube and 3 mm plate offcuts					
Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com					Generated from cad/src; do not edit by hand