


CONCEPT, NOT FOR FABRICATION


MotionCore · github.com/BoujeeEnjinia1701/motioncore

REV	DESCRIPTION	DATE	BY
P1	Preliminary GA, interface v0.1 (MTC-CAL-001)	2026-09-25	AC
P2	Notes: 20 to 60 V, 2.0 kg limit, XT90 provisional (DDR-002)	2026-09-25	AC
P3	Constructable design: tube, floor, rivet nuts, sockets (DDR-003)	2026-10-01	AC
P4	Coil economizer on the carrier board; sealed power connector to follow (DEC-...	2026-10-02	AC

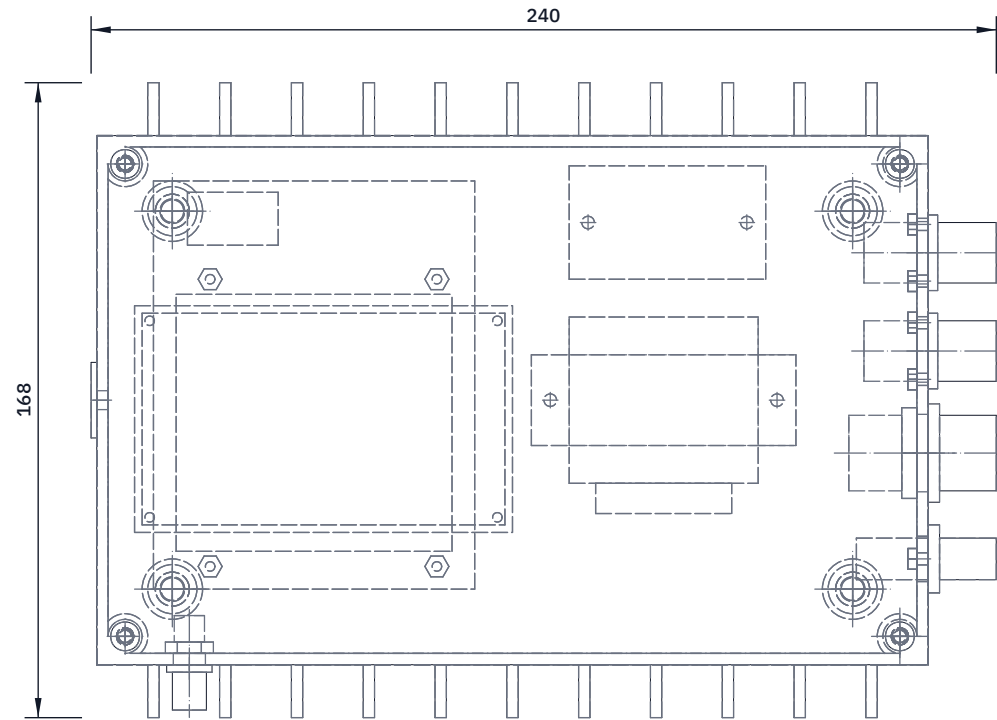


TOP VIEW

Scale 1:2; looking down (along -Z)

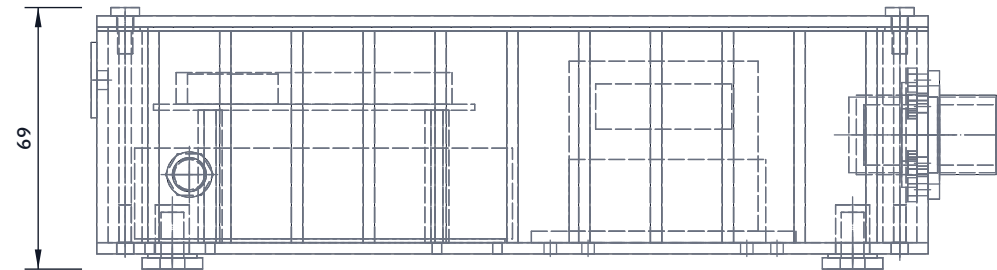


FRONT VIEW

Scale 1:2; looking at the front (along +Y)

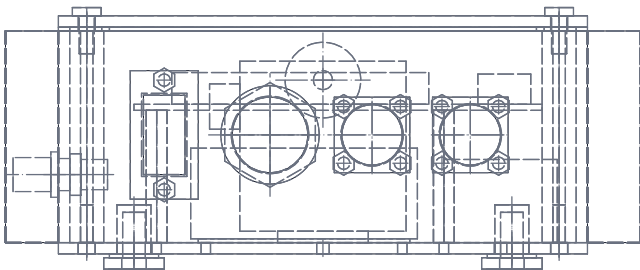

RIGHT VIEW

Scale 1:2; looking at the right side (along -X)

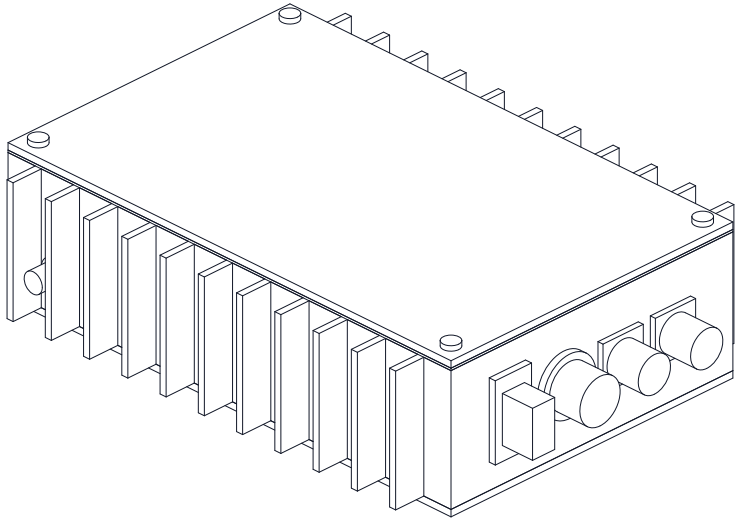

ISOMETRIC VIEW

Not to scale; seen from the front right and above, about 30 deg elevation

KEY DIMENSIONS AND INTERFACES (MM)

Overall 240 x 168 x 69 incl. pads, screws, sockets

Finned tube 220 x 140 x 56, wall 3; floor and lid 3

Fins 11 per side, 3 x 14, full height, pitch 19

Mounting: 4 x M6 rivet nuts on 180 x 100, pads D16 x 3

+X wall, from -Y: XT90 power in (bench only),

9-pin motor, M12 8-pin A safety loop,

M12 5-pin B command and CAN; -Y wall: M8 speed

Input 20 to 60 V DC; fuse 20 A (36, 48 V) or 40 A (24 V)

Contactors 100 A, breaks 50 A at 60 V DC, 50 ms max;

coil economizer on the supervisor board

Floor joint: conductive sealant, 4 x M4 into ports

Module about 1.92 kg (R12 limit 2.0 kg)

PRELIMINARY, NOT FOR FABRICATION

MOTIONCORE

github.com/BoujeeEnjinia1701/motioncore

General arrangement, drive and safety module

DRAWING NO. MTC-DWG-001			REV P4	SHEET 1 of 1	SIZE ANSI B
SCALE 1:2	UNITS mm	PROJECTION 	DATE 2026-10-02	DRAWN Amish Chadha	

MATERIAL / NOTES Finned tube, floor plate and lid: Al, clear anodized. Parts per bom/bom.csv					
---	--	--	--	--	--