



REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-10-01	AC



TOP VIEW

Scale 1:2; looking down (along -Z)

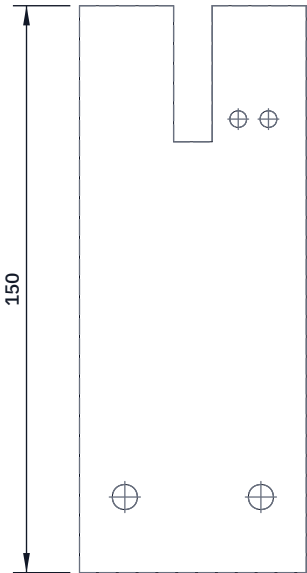


FRONT VIEW

Scale 1:2; looking at the front (along +Y)



RIGHT VIEW

Scale 1:2; looking at the right side (along -X)

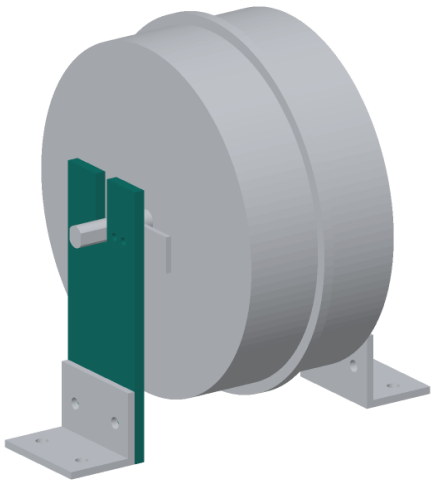

WHERE IT GOES

This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

Cut two 150 mm lengths of 60 x 6 mm bar; square and deburr.

Axle slot: 10.2 mm wide on the centre line, 36 mm deep from the top end, flat bottom. The axle flats (10 mm) slide in from above and its centre sits 120 mm above the board. Saw both sides, file square.

Foot bolt holes: two 6.6 mm, 20 mm up, 18 mm each side of centre.

The upright on the socket side of the motor (the one nearer the front edge) also gets two 4.4 mm holes for the Hall bracket, 120 mm up, 12 and 20 mm from centre toward the module.

Fit: inside faces 135 mm apart (the motor's axle width); feet bolted to the outside faces; axle nut and washer outside each upright.

Check: the motor's axle drops into both slots by hand and cannot turn.

MOTIONCORE

github.com/BoujeeEnjinia1701/motioncore

MotionCore motor upright (make 2): making sketch

DRAWING NO. MTC-DWG-106		REV P1	SHEET 1 of 1	SIZE ANSI B
SCALE 1:2	UNITS mm	PROJECTION 	DATE 2026-10-01	DRAWN Amish Chadha
MATERIAL / NOTES Aluminum flat bar 60 x 6 mm, 6082 or 6061				
Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com			Generated from cad/src; do not edit by hand	