



REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-10-01	AC

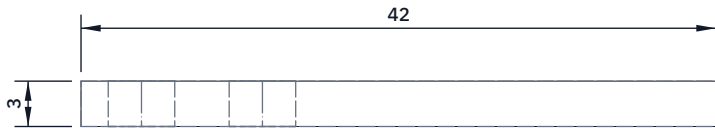


TOP VIEW
Scale 2:1; looking down (along -Z)

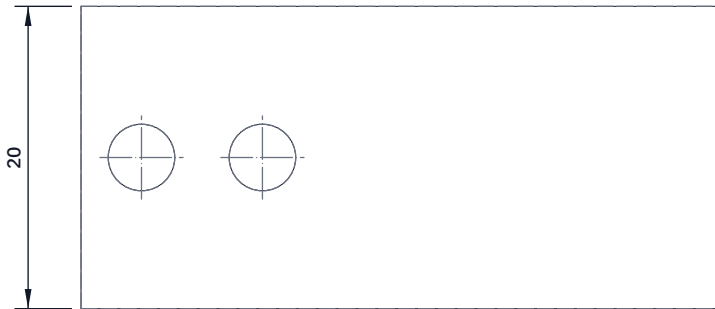

FRONT VIEW
Scale 2:1; looking at the front (along +Y)



RIGHT VIEW
Scale 2:1; looking at the right side (along -X)

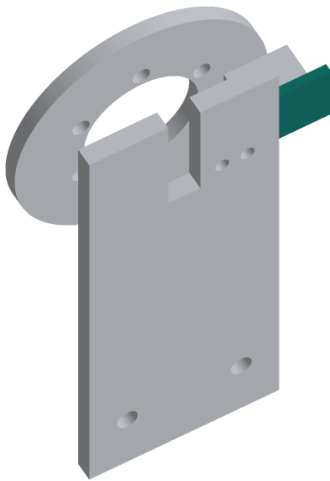

WHERE IT GOES
This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

Cut 42 mm of 20 x 3 mm flat bar; deburr.

Two 4.4 mm holes on the centre line, 4 and 12 mm from one end: these bolt to the socket-side upright with M4 bolts.

The Hall pickup sits on the other end, its centre 26 mm from the bolted end; mark its lug holes through the pickup and drill to suit (usually two M3).

Fit: the bracket lies flat on the inside face of the upright, level with the axle, and reaches toward the module. The pickup's face is 3.5 mm from the magnet ring, at the ring's magnet circle (34 mm from the axle centre).

Check: spin the wheel by hand; the ring passes the pickup without touching and the gap is 3 to 4 mm all round.

MOTIONCORE				github.com/BoujeeEnjinia1701/motioncore			
MotionCore Hall pickup bracket: making sketch							
DRAWING NO. MTC-DWG-108			REV P1		SHEET 1 of 1		SIZE ANSI B
SCALE 2:1	UNITS mm	PROJECTION 		DATE 2026-10-01		DRAWN Amish Chadha	
MATERIAL / NOTES Aluminum flat bar 20 x 3 mm							
Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com						Generated from cad/src; do not edit by hand	