

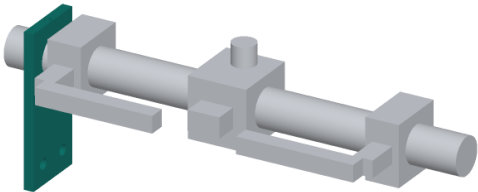


REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-10-01	AC

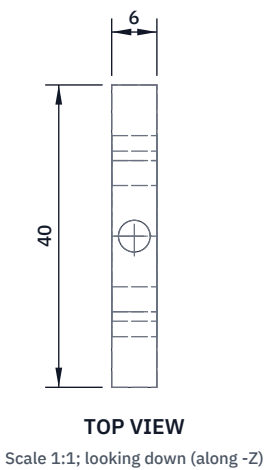

WHERE IT GOES

This part in colour, its neighbours in grey

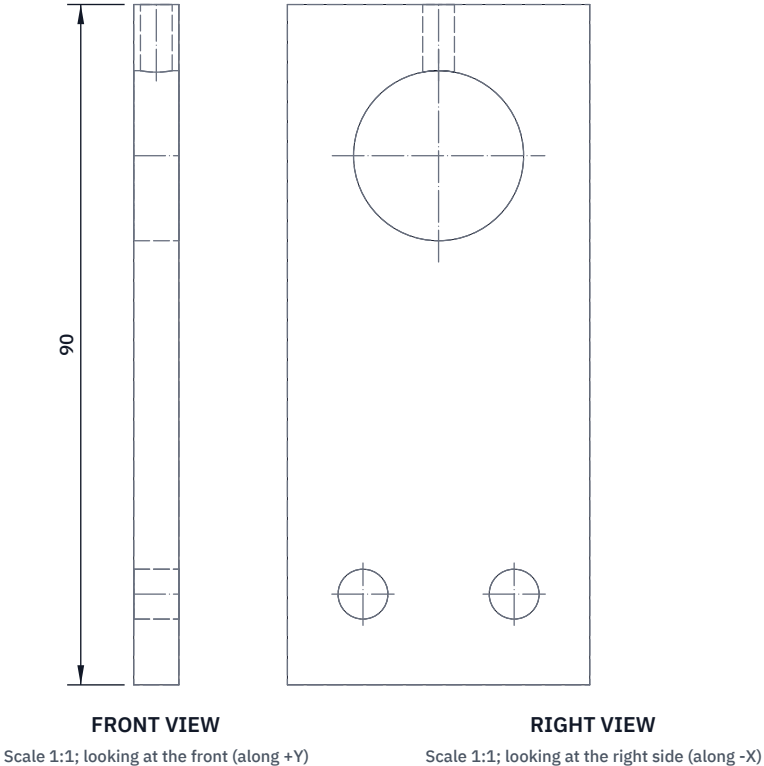

HOW TO MAKE IT AND HOW IT FITS

Cut two 90 mm lengths of 40 x 6 mm bar; square and deburr.

Bar hole: 22.5 mm on the centre line, centre 70 mm up from the board end. Drill a pilot, open with a step drill or hole saw, file to a sliding fit on the 22.2 mm handlebar.

Grub screw: drill 4.2 mm down the centre line from the top end into the bar hole and tap M5; an M5 grub screw locks the bar.

Foot bolt holes: two 6.6 mm, 12 mm up, 10 mm each side of centre.

Fit: a 40 mm foot bolts to the outside face of each post; the posts stand 230 mm apart (centres) with the bar through both.

Check: the bar slides through both posts by hand and locks with the grub screws.

MOTIONCORE				github.com/BoujeeEnjinia1701/motioncore			
MotionCore bar post (make 2): making sketch							
DRAWING NO. MTC-DWG-109			REV P1		SHEET 1 of 1		SIZE ANSI B
SCALE 1:1	UNITS mm	PROJECTION 		DATE 2026-10-01		DRAWN Amish Chadha	
MATERIAL / NOTES Aluminum flat bar 40 x 6 mm, 6082 or 6061							
Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com				Generated from cad/src; do not edit by hand			