



CONCEPT, NOT FOR FABRICATION

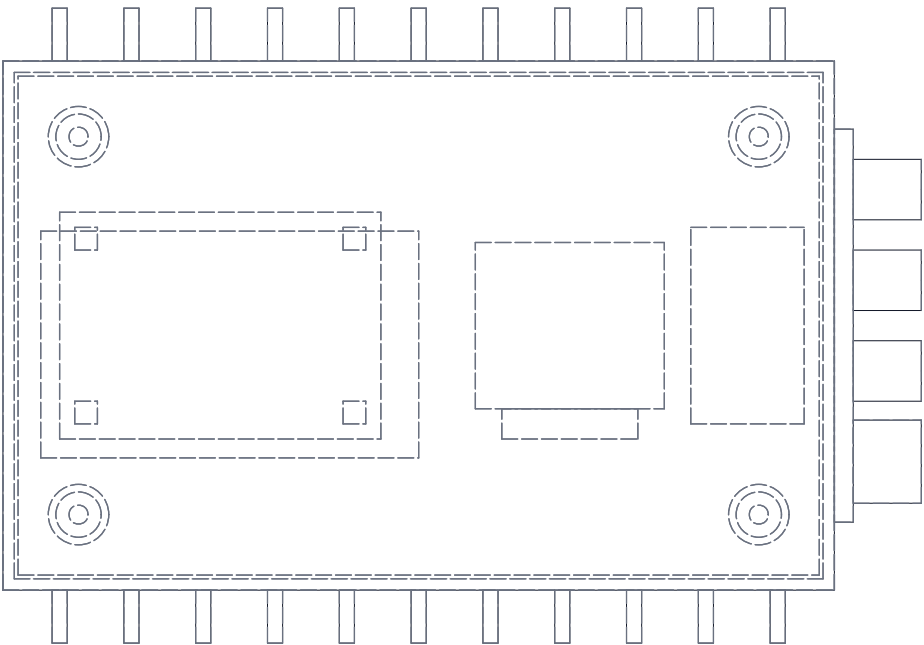


TOP VIEW

Scale 1:2

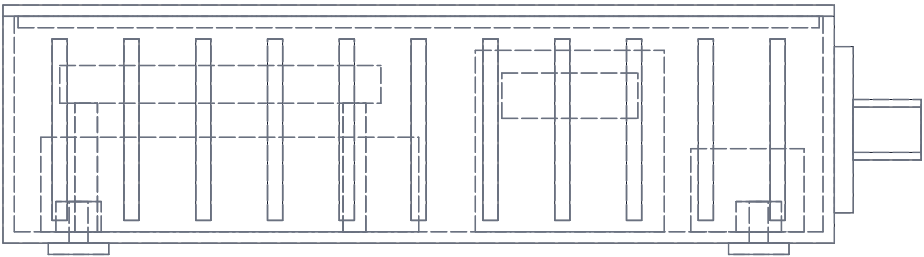


FRONT VIEW

Scale 1:2

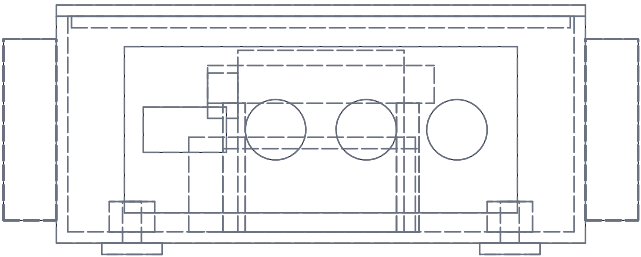

RIGHT VIEW

Scale 1:2

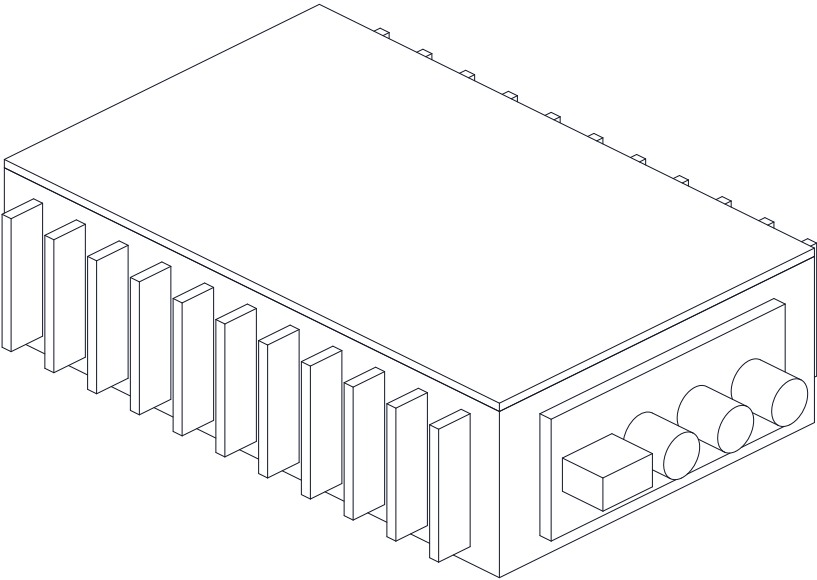

ISOMETRIC VIEW

Not to scale

KEY DIMENSIONS AND INTERFACES (MM)

Overall 243 x 168 x 66 incl. pads and connectors
Body 220 x 140 x 60, wall 3, lid 3
Fins 11 per side, 4 x 14 x 48, pitch 19
Mounting: 4 x M6 on 180 x 100, pads D16 x 3
+X panel, from -Y: XT90 power in (provisional),
9-pin motor plug, M12 8-pin A safety loop,
M12 5-pin B command and CAN (250 kbit/s)
Input 20 to 60 V DC; fuse 20 A (36, 48 V) or 40 A (24 V)
Contactor 100 A, breaks 50 A at 60 V DC, 50 ms max
Precharge 100 ohm, close at 0.6 s (MTC-CAL-001)
Module about 1.94 kg (R12 limit 2.0 kg)
PRELIMINARY, NOT FOR FABRICATION

MOTIONCORE

General arrangement, drive and safety module

DRAWING NO.

MTC-DWG-001

REV

P2

SHEET

1 of 1

SIZE

ANSI B

SCALE

1:2

UNITS

mm

PROJECTION



DATE

2026-09-25

DRAWN

Amish Chadha

MATERIAL / NOTES

Body and lid: extruded Al, clear anodized. Parts per bom/bom.csv