



CONCEPT, NOT FOR FABRICATION

REV	DESCRIPTION	DATE	BY
P1	Preliminary GA, interface v0.1 (MTC-CAL-001)	2026-09-25	AC

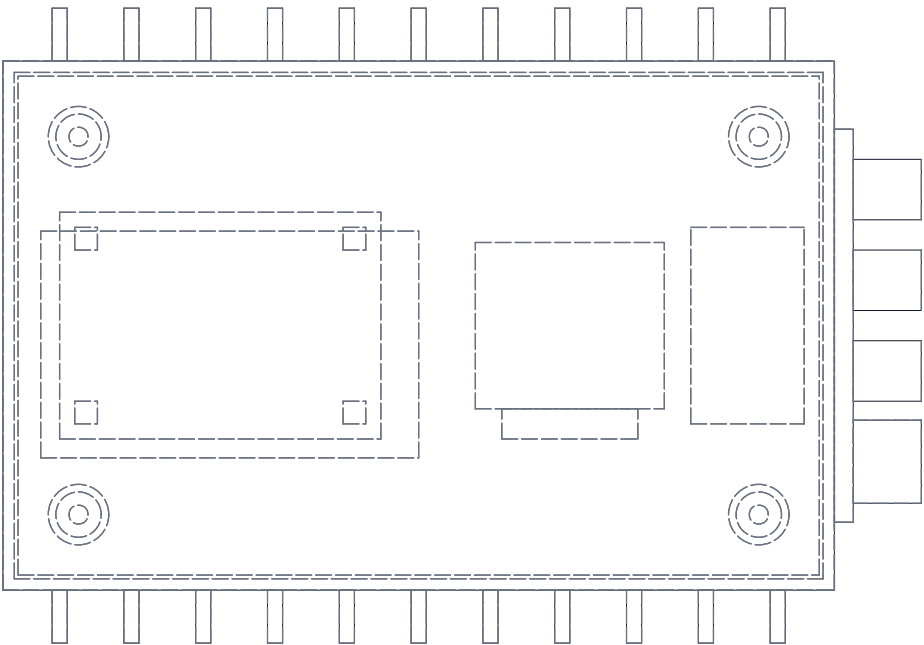


TOP VIEW

Scale 1:2

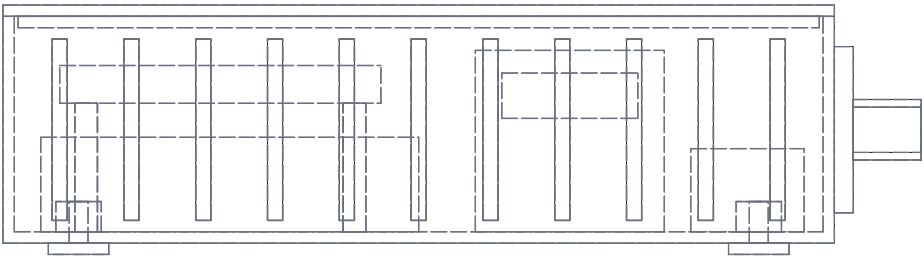


FRONT VIEW

Scale 1:2

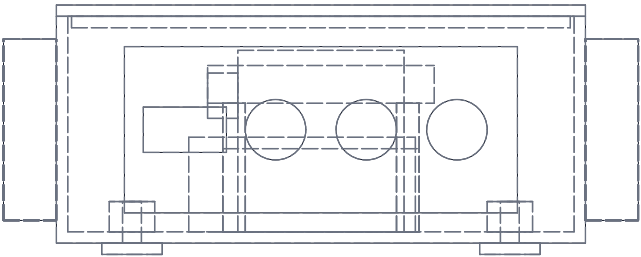

RIGHT VIEW

Scale 1:2

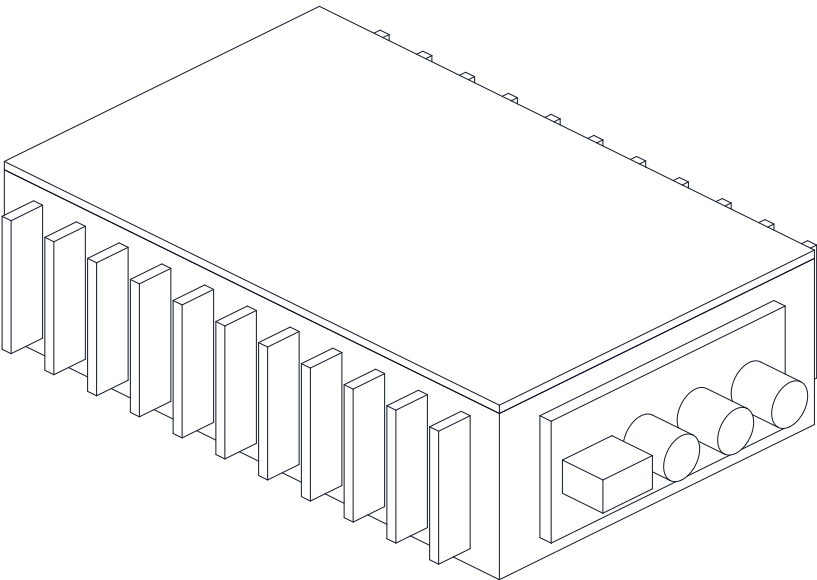

ISOMETRIC VIEW

Not to scale

KEY DIMENSIONS AND INTERFACES (MM)

Overall 243 x 168 x 66 incl. pads and connectors
Body 220 x 140 x 60, wall 3, lid 3
Fins 11 per side, 4 x 14 x 48, pitch 19
Mounting: 4 x M6 on 180 x 100, pads D16 x 3
+X panel, from -Y: XT90 power in (anti-spark),
9-pin motor plug, M12 8-pin A safety loop,
M12 5-pin B command and CAN (250 kbit/s)
Input 20 to 58 V DC; fuse 20 A (36, 48 V) or 40 A (24 V)
Contactor 100 A, breaks 50 A at 60 V DC, 50 ms max
Precharge 100 ohm, close at 0.6 s (MTC-CAL-001)
Module about 1.94 kg (R12 target 1.5 kg not met)
PRELIMINARY, NOT FOR FABRICATION

MOTIONCORE

General arrangement, drive and safety module

DRAWING NO. MTC-DWG-001			REV P1	SHEET 1 of 1	SIZE ANSI B
SCALE 1:2	UNITS mm	PROJECTION 	DATE 2026-09-25		DRAWN Amish Chadha
MATERIAL / NOTES Body and lid: extruded Al, clear anodized. Parts per bom/bom.csv					
Licensed CERN-OHL-S-2.0 · Open Hardware Portfolio · amishchadha.com				Generated from cad/src; do not edit by hand	