



CONCEPT, NOT FOR FABRICATION

NoiseMap · github.com/BoujeeEnjinia1701/noisemap

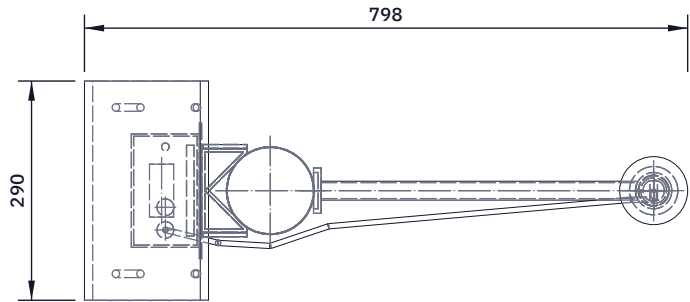


TOP VIEW

Scale 1:10; looking down (along -Z)

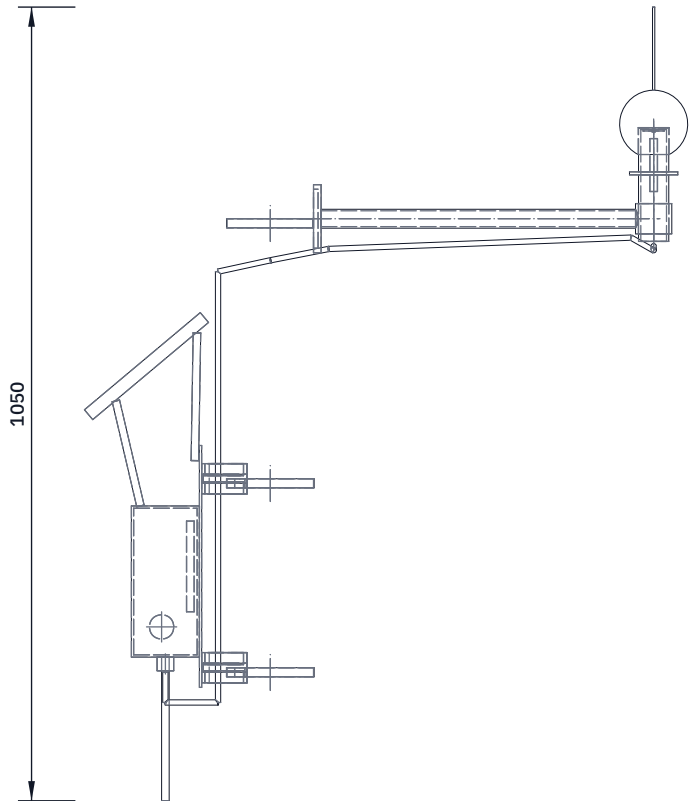


FRONT VIEW

Scale 1:10; looking at the front (along +Y)

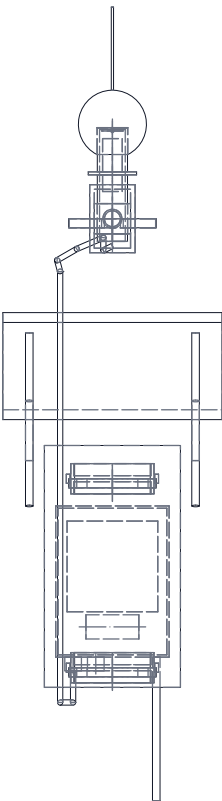

RIGHT VIEW

Scale 1:10; looking at the right side (along -X)

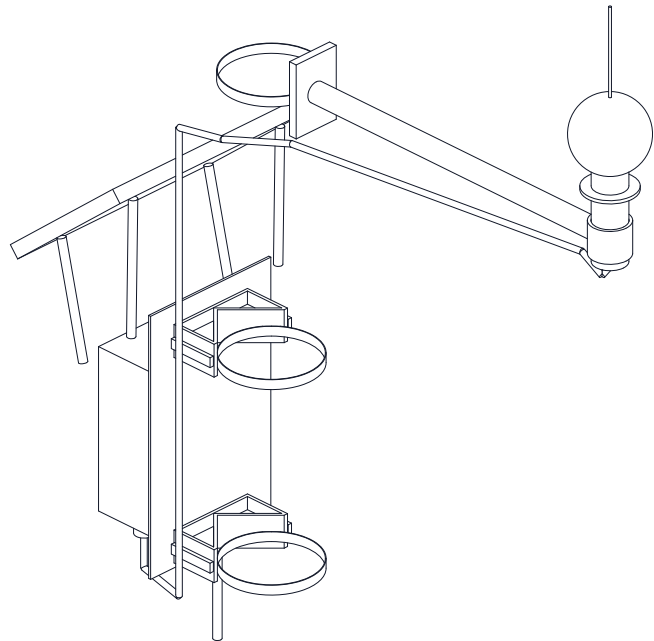

ISOMETRIC VIEW

Not to scale; seen from the front right and above, about 30 deg elevation

KEY DIMENSIONS AND INTERFACES (MM)

Microphone port 4000 above sidewalk, 450 off pole face
Design pole OD 114.3; adapter seats 60 to 140
V-blocks 110 x 60 x 40, 90 deg, 100 opening,
pocketed: 4 walls, 8 web; saddle pocket 6 deep
Arm 25 x 2 Al tube, 422 long, own band clamp
Head 40 OD x 150; port 3 dia x 2
Windscreen 90 foam ball, bore 41; spike 110
FieldNode core per FND-DWG-001: box 150 x 90 x 200,
6 W panel at 40 deg, back plate 180 x 320 x 3
Core and arm turn independently about the pole
M12 5-pin cable 1.5 m: 3.3 V, GND, UART 9,600 baud
Mass about 3.45 kg (NSM-CAL-001 v0.2; R10 3.5 kg)
PRELIMINARY, NOT FOR FABRICATION

NOISEMAP

github.com/BoujeeEnjinia1701/noisemap

General arrangement, street pole node

DRAWING NO.

NSM-DWG-001

REV

P2

SHEET

1 of 1

SIZE

ANSI B

SCALE

1:10

UNITS

mm

PROJECTION



DATE

2026-09-25

DRAWN

Amish Chadha

MATERIAL / NOTES

Arm, saddle, V-blocks 6063 Al; head ASA; bands stainless. See bom/bom.csv

Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com

Generated from cad/src; do not edit by hand