



CONCEPT, NOT FOR FABRICATION

NoiseMap · github.com/BoujeeEnjinia1701/noisemap

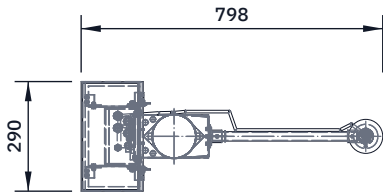


TOP VIEW

Scale 1:20; looking down (along -Z)

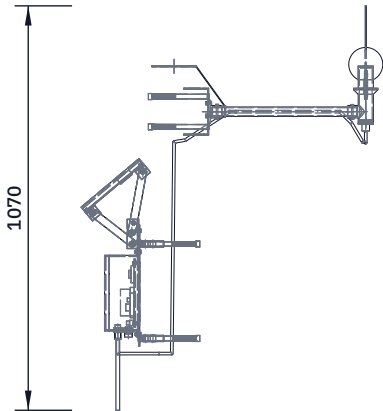


FRONT VIEW

Scale 1:20; looking at the front (along +Y)



RIGHT VIEW

Scale 1:20; looking at the right side (along -X)

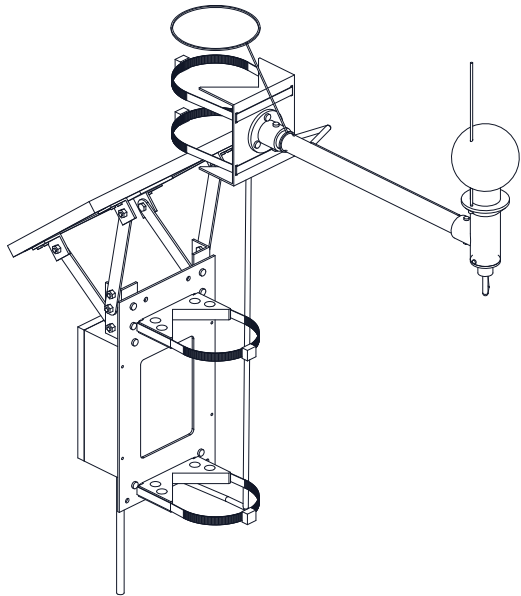

ISOMETRIC VIEW

Not to scale; seen from the front right and above, about 30 deg elevation

KEY DIMENSIONS AND INTERFACES (MM)

Microphone port 4000 above sidewalk, 450 off pole face
Design pole OD 114.3; adapter seats 60 to 140
V-blocks 112 x 63 x 16, 90 deg V, 106 mouth,
on FieldNode's V-block screws; bands through its slots
Arm saddle: 2.5 sheet channel, 2 bands; tube flange
Arm 25 x 2 Al tube, 383 long, cross bolted
Head 40 OD x 150; port 3 dia x 2; cap, M16 gland
Windscreen 90 foam ball, bore 40; spike in skirt boss
FieldNode core per FND-DWG-001 Rev P3, without its
small-pole V-blocks and bands
Core and arm turn independently about the pole
M12 cable 1.5 m: pin 1 3.3 V, 3 GND, 2 and 4 UART
Mass about 3.45 kg (NSM-CAL-001 v0.3; R10 3.5 kg)
PRELIMINARY, NOT FOR FABRICATION

NOISEMAP

github.com/BoujeeEnjinia1701/noisemap

General arrangement, street pole node

DRAWING NO. NSM-DWG-001			REV P4	SHEET 1 of 1	SIZE ANSI B
SCALE 1:20	UNITS mm	PROJECTION 	DATE 2026-10-02		DRAWN Amish Chadha
MATERIAL / NOTES Saddle, tube, V-blocks Al; head ASA; bands stainless. See bom/bom.csv					
Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com				Generated from cad/src; do not edit by hand	