



REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-10-02	AC

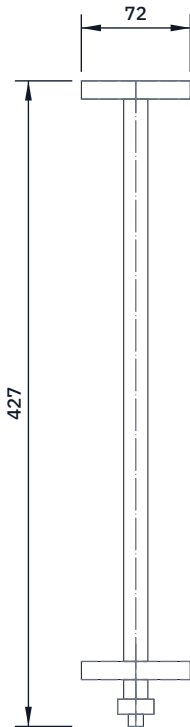


TOP VIEW

Scale 1:5; looking down (along -Z)




FRONT VIEW

Scale 1:5; looking at the front (along +Y)

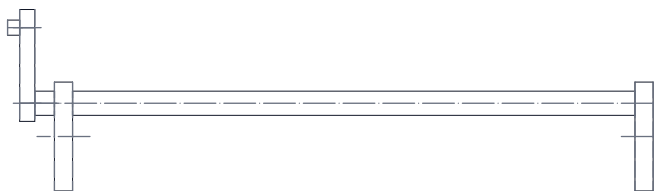

RIGHT VIEW

Scale 1:5; looking at the right side (along -X)

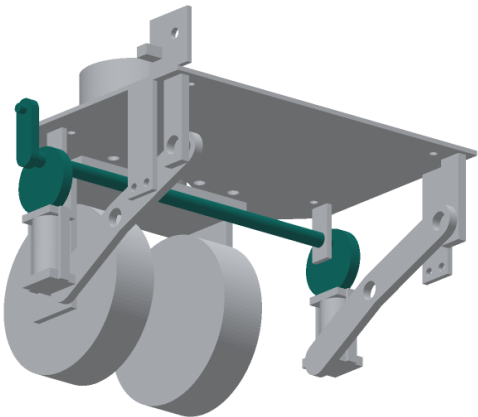

WHERE IT GOES

This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

Shaft: 16 mm bright steel bar, 419 mm long.

Cams (make 2): discs 72 mm across, 12 mm thick, with a 16 mm bore whose centre is 22 mm from the disc centre (the cam's throw).

Crank: 10 mm flat bar 24 wide, 74 long, ends rounded; 16 mm bore at one end, a 10 mm pin 18 long welded at the other, 50 mm apart.

Slide the shaft through both front hangers, then slide on a cam each side (outer faces 198 mm from the centre line) and the crank on the long end (outer face 221 mm out).

With the cams' thick side straight down and the crank pin straight up, drill a 5 mm hole through each hub and the shaft; fit roll pins.

Check: the shaft turns freely; cams and crank do not slip on it.

PalletPilot cam shaft, cams and crank: making sketch

DRAWING NO. PLP-DWG-105			REV P1	SHEET 1 of 1	SIZE ANSI B
SCALE 1:5	UNITS mm	PROJECTION 	DATE 2026-10-02		DRAWN Amish Chadha
MATERIAL / NOTES Bright steel bar 16 mm; steel plate 12 mm (cams); flat bar 24 x 10 mm (crank)					
Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com			Generated from cad/src; do not edit by hand		