




REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-10-02	AC

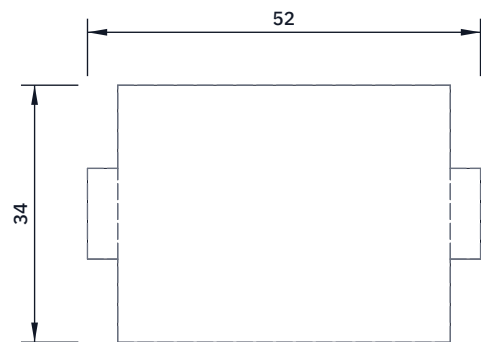


TOP VIEW
Scale 1:1; looking down (along -Z)

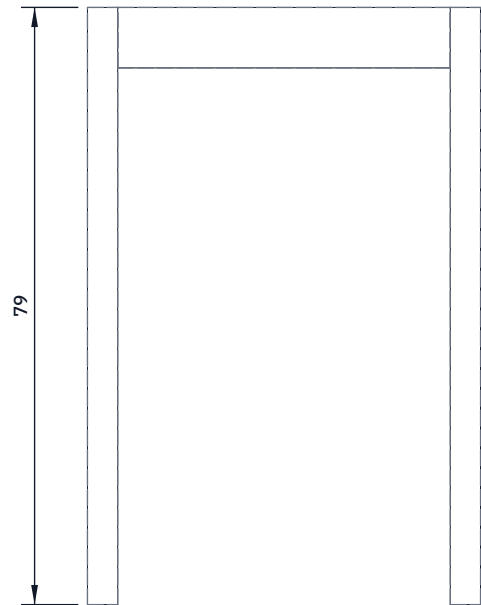

FRONT VIEW
Scale 1:1; looking at the front (along +Y)

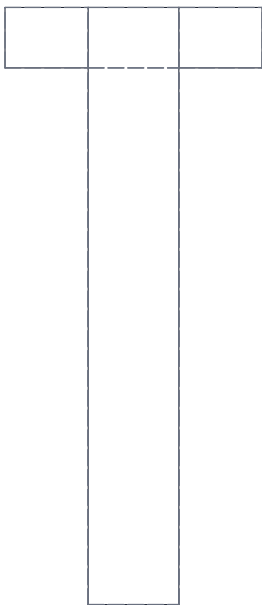

RIGHT VIEW
Scale 1:1; looking at the right side (along -X)

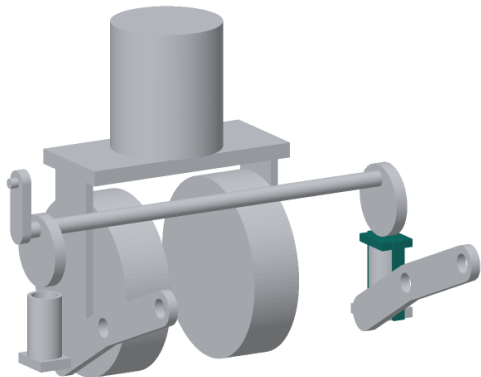

WHERE IT GOES
This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

Saddle (make 2): 8 mm steel, 44 x 34 mm. Turn a 2 mm deep ring groove in its underside, 34 mm across, to locate the spring top.

Straps (make 4): 4 mm steel strip 12 mm wide, 79 mm long.

Bottom end: a 6.5 mm hole 5 mm from the end (bolted to the tab).

Top end: a 6.5 mm wide slot, 12 mm long, ending 4 mm from the end.

Fit: one strap each side of the spring, bolted M6 to the tab and, through its slot, to the saddle. The slot lets the spring squash when a wheel rides a bump; when the lever lifts the saddle, the top of the slot catches and the straps lift the arm and wheel.

With the wheels down the saddle bolt sits 4 mm below the slot top.

Check: the saddle slides up and down the slots without binding.

PALLETPILOT			github.com/BoujeeEnjinia1701/palletpilot		
PalletPilot spring saddle and lift straps (make 2 sets): making sketch					
DRAWING NO. PLP-DWG-106			REV P1	SHEET 1 of 1	SIZE ANSI B
SCALE 1:1	UNITS mm	PROJECTION 	DATE 2026-10-02		DRAWN Amish Chadha
MATERIAL / NOTES Steel plate 8 mm (saddle); steel strip 12 x 4 mm (straps)					
Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com					
Generated from cad/src; do not edit by hand					