



CONCEPT, NOT FOR FABRICATION


REV	DESCRIPTION	DATE	BY
P1	General arrangement for TRL 3 (PCF-CAL-001)	2026-09-25	AC

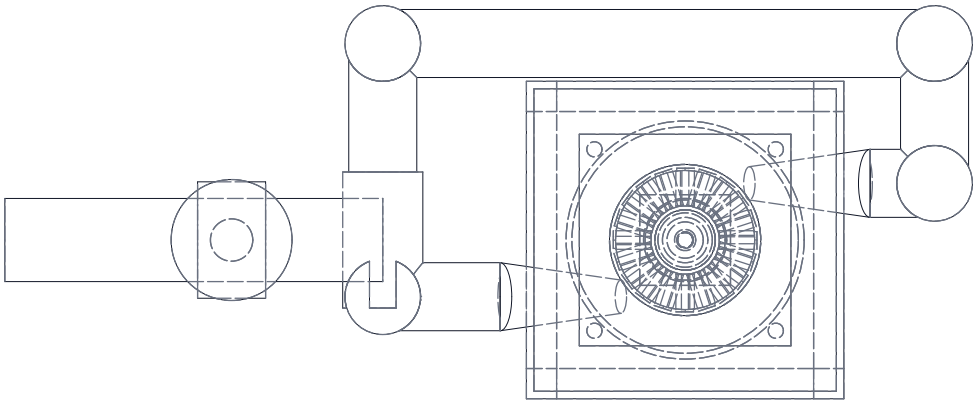


TOP VIEW
Scale 1:10

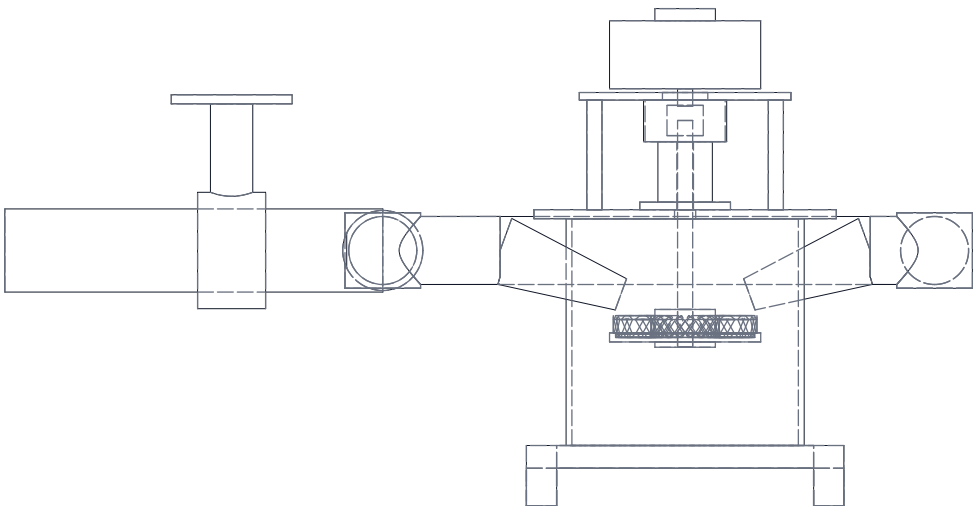

FRONT VIEW
Scale 1:10

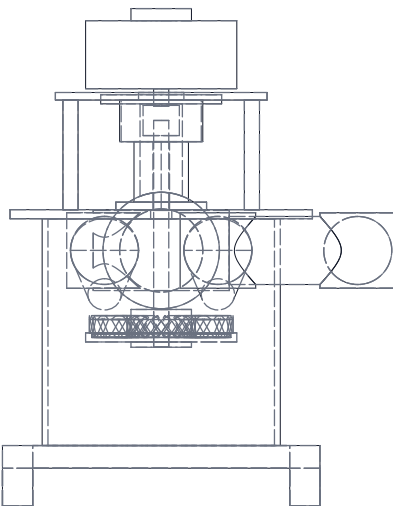

RIGHT VIEW
Scale 1:10

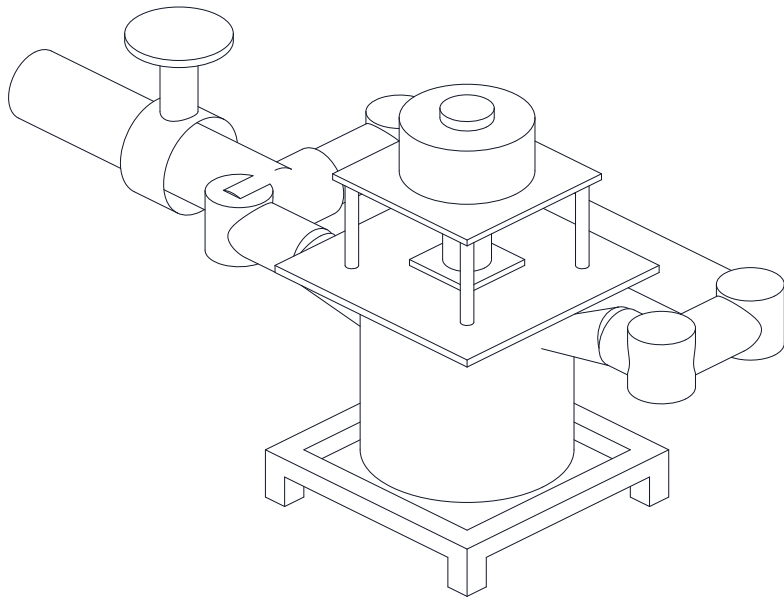

ISOMETRIC VIEW
Not to scale; penstock shown as a stub

MAIN DIMENSIONS (MM), Z FROM NORMAL TAILWATER

Nozzle centerline 280 above tailwater (R13: 300 max)
Runner 200 OD, 150 pitch dia., 20 buckets, mid-plane 235
Runner underside 210; housing 315 OD x 300, bottom at 80
Two jets, 34 mm inserts (20 to 45 range), 20 deg below runner plane
Jets strike the pitch circle at +Y and -Y, opposed
Shaft 20 dia. x 300; two 6204-2RS on the lid at 392
Generator 200 dia. x 90 on plate at 537
Penstock 110 OD; branches 90 OD at Z 338
Lid 400 sq. x 12; frame 420 sq., legs 80

PARTS LIST (ITEMS MATCH BOM/BOM.CSV)

- 1 Turgo runner, printed
- 2 Shaft and hub
- 3 Bearings, housing, mount, guard
- 4 Jaw coupling
- 5 Generator, low-speed BLDC
- 6 Housing and lid

PARTS LIST, CONTINUED

- 7 Manifold, two nozzles
 - 8 Inlet gate valve (slow closing)
 - 9 Penstock (stub shown)
 - 11 Turbine frame
- Items 10, 12 to 17 not shown
Guard the coupling; DC side 100 V

PICOFLOW

Turbine unit general arrangement

DRAWING NO. PCF-DWG-001		REV P1	SHEET 1 of 1	SIZE ANSI B
SCALE 1:10	UNITS mm	PROJECTION 	DATE 2026-09-25	DRAWN Amish Chadha
MATERIAL / NOTES Runner PETG (prototype) or PA-GF; housing PVC SN4; frame galvanized steel. PRELIMINARY, NOT FOR FABRICATION				
Licensed CERN-OHL-S-2.0 · Open Hardware Portfolio · amishchadha.com				Generated from cad/src; do not edit by hand