


REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-10-02	AC

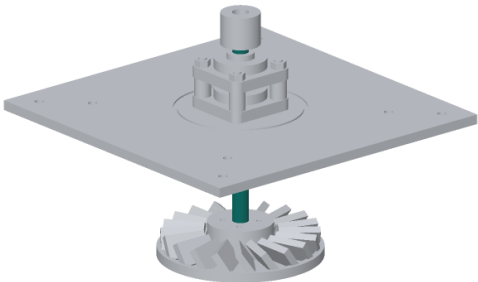

WHERE IT GOES

This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

Cut 294 mm of 20 mm ground stainless bar; face both ends square and chamfer them 1 mm so the bearings slide on.


Check the bar slides through a bearing unit by hand; polish any burr with fine emery.

No keyways: the runner hub and coupling clamp the shaft, and the bearing inserts lock with their own set screws.

At assembly, spot each set screw into the shaft with a 5 mm drill 0.5 mm deep through the screw hole, then tighten.

Fit: bottom end flush with the underside of the runner hub; top end half way into the jaw coupling, 30 mm above the upper bearing.

Check: straight within 0.1 mm over its length (roll it on glass).

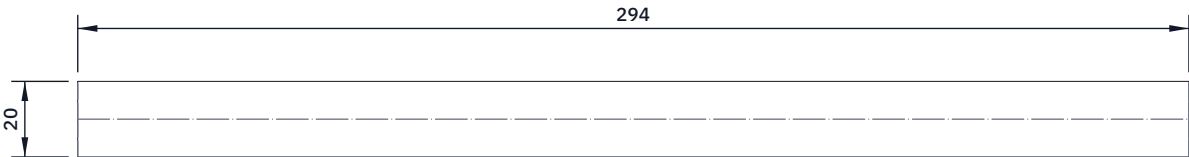

TOP VIEW

Scale 1:2; looking down (along -Z)



FRONT VIEW

Scale 1:2; looking at the front (along +Y)



RIGHT VIEW

Scale 1:2; looking at the right side (along -X)

PICOFLOW

github.com/BoujeeEnjinia1701/picoflow

PicoFlow shaft: making sketch

DRAWING NO. PCF-DWG-106			REV P1	SHEET 1 of 1	SIZE ANSI B
SCALE 1:2	UNITS mm	PROJECTION 	DATE 2026-10-02		DRAWN Amish Chadha
MATERIAL / NOTES 316 stainless steel bar, 20 mm, h9 or ground					
Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com				Generated from cad/src; do not edit by hand	