



REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-10-02	AC




TOP VIEW
Scale 1:2; looking down (along -Z)

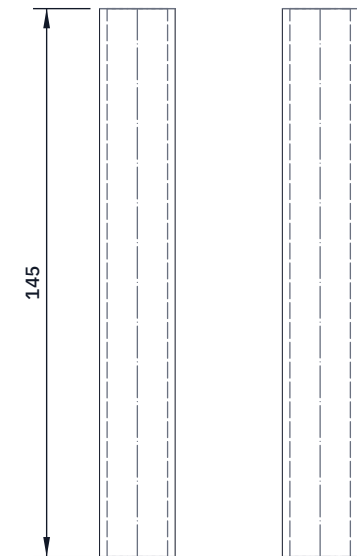

FRONT VIEW
Scale 1:2; looking at the front (along +Y)

RIGHT VIEW
Scale 1:2; looking at the right side (along -X)

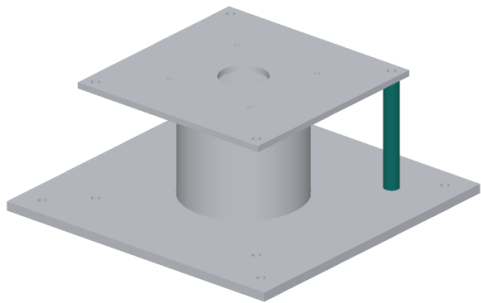

WHERE IT GOES
This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

Posts: cut four 145.0 mm lengths of 20 x 2 mm steel tube. Face the ends square on a disc sander; all four the same within 0.2 mm, so the plate sits level.

Post rods: cut four 195 mm lengths of M10 rod; clean the thread ends.

Bearing spacer sleeves: cut four 24.0 mm lengths of 20 mm tube with a 10.5 mm or larger bore, the same within 0.1 mm.

Tie rods: cut four 345 mm lengths of M10 rod.

Paint or galvanize the cut ends.

Fit: each post stands on the lid at 125 mm each way from the centre; the rod goes up from under the lid, through the post and the plate, with a 30 mm washer and nut under the lid and a washer and nut on the plate.

Check: the four posts stand the same height on a flat surface.

PICOFLOW

github.com/BoujeeEnjinia1701/picoflow

PicoFlow post and spacer sleeve (make 4 of each): making sketch

DRAWING NO. PCF-DWG-109			REV P1	SHEET 1 of 1	SIZE ANSI B
SCALE 1:2	UNITS mm	PROJECTION 	DATE 2026-10-02		DRAWN Amish Chadha
MATERIAL / NOTES Steel tube 20 x 2 mm; M10 threaded rod					
Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com					Generated from cad/src; do not edit by hand