
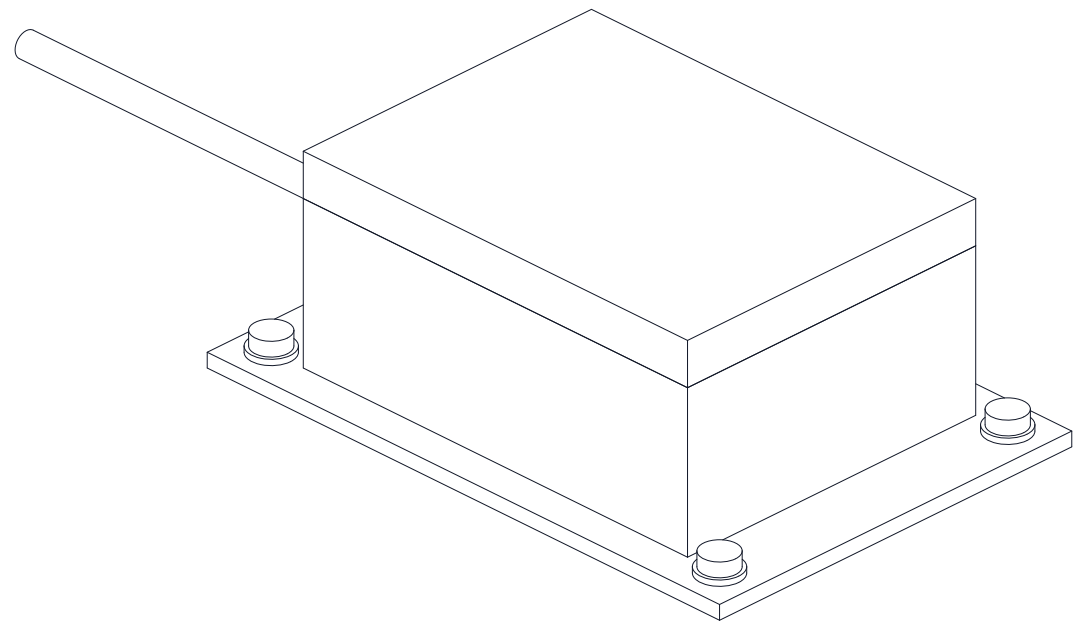


CONCEPT, NOT FOR FABRICATION

REV	DESCRIPTION	DATE	BY
P1	Preliminary GA for TRL 3 (from cad/src/model.py)	2026-09-25	AC
P2	Supply note: 60 V converter (PHL-DDR-002)	2026-09-25	AC

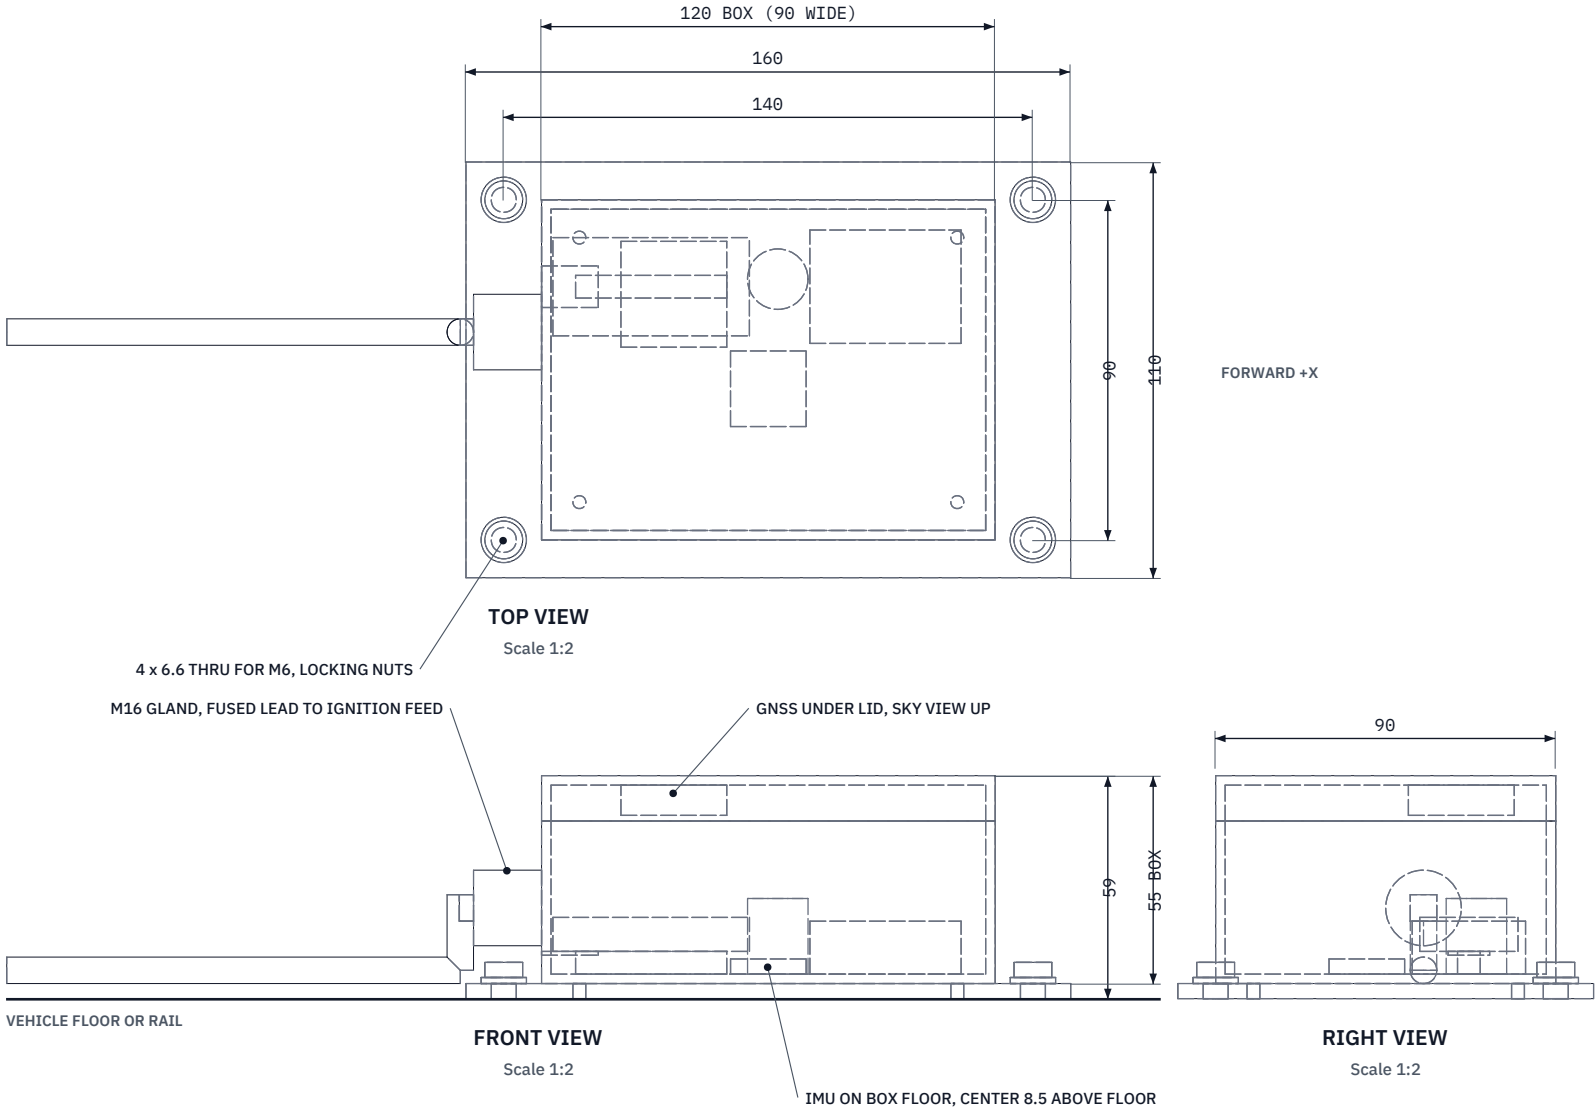

ISOMETRIC VIEW
Not to scale

MAIN DIMENSIONS AND INTERFACES (MM)

Plate Al 5052 160 x 110 x 4; 4 x M6 on 140 x 90
Stock IP65 box 120 x 90 x 55; 4 x M4 to plate on 100 x 70
Overall height 59 on the floor; logger about 0.37 kg
Bolt at existing floor, seat-rail or crossmember fixings
Plate first mode about 186 Hz on corner bolts (PHL-CAL-001)
IMU screwed flat to the box floor; X axis forward
GNSS under the plastic lid; keep metal off the lid
Supply 9 to 36 V, converter rated 60 V; fused 2 A, ignition switched; 0.54 W
Third-angle; front view from -Y; X forward along the vehicle

POTHOLELOG

General arrangement

DRAWING NO. PHL - DWG - 001			REV P2	SHEET 1 of 1	SIZE ANSI B
SCALE 1:2	UNITS mm	PROJECTION 	DATE 2026-09-25		DRAWN Amish Chadha
MATERIAL / NOTES Al 5052 plate; stock IP65 box; bought-in parts per bom/bom.csv. PRELIMINARY, NOT FOR FABRICATION					
Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com				Generated from cad/src; do not edit by hand	