




CONCEPT, NOT FOR FABRICATION

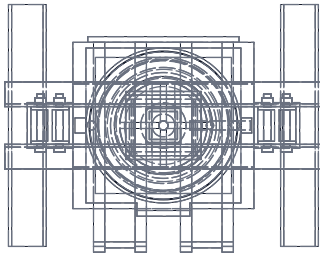


TOP VIEW
Scale 1:20

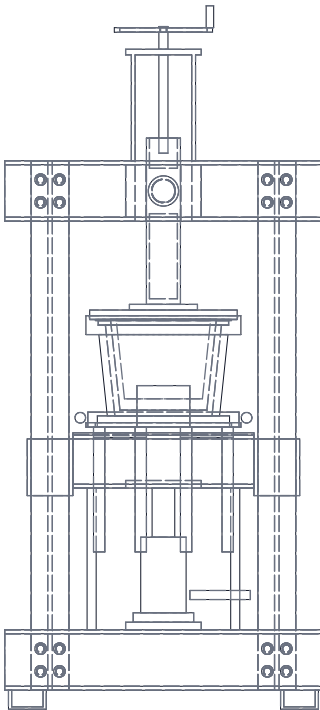

FRONT VIEW
Scale 1:20

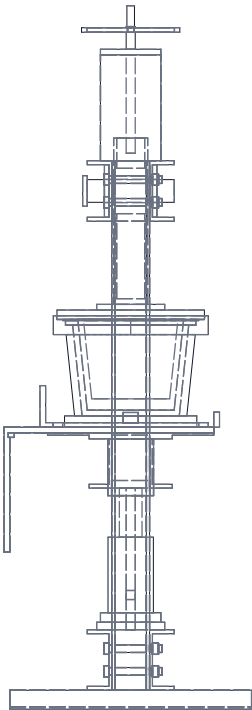

RIGHT VIEW
Scale 1:20

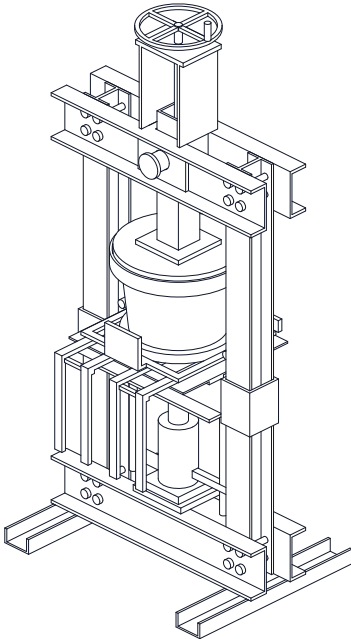

ISOMETRIC VIEW
Not to scale; guards not shown

KEY DIMENSIONS (MM) AND DATA

Frame 840 x 640 on feet; 840 x 655 rails folded
Rail hinge 320 in front of axis; deployed to 650
Height 1806 to handwheel; loading rim height 921
Uprights at 600 centers; beams 2 x UPN160, gap 100
Upright joints bolted, 4 x M20 8.8 each (16 total)
Top beam 1291 to 1451; load pin 60 dia at 1371
20 t jack, stroke 150; pressing travel 110
Crank lift 200 (Tr24 x 5, 40 turns); open gap 70
Pot: inner rim 280, depth 240, wall 15, rim 345
Female mold 410 dia; male flange 390 in lip, fit 0.1
Frame 190 MPa, pin 258 MPa, bolts 75 MPa at 294 kN
Mold gap deflection 0.6 mm at 10 t, 1.8 mm at 30 t
Press about 298 kg plus bolts; heaviest part 39 kg
Not met at TRL 3: R10 cost (\$984 vs \$930)
Pin-presence interlock; guards required
PRELIMINARY, NOT FOR FABRICATION

POTPRESS

General arrangement, press closed

DRAWING NO. PPR-DWG-001			REV P2	SHEET 1 of 1	SIZE ANSI B
SCALE 1:20	UNITS mm	PROJECTION 	DATE 2026-09-25		DRAWN Amish Chadha
MATERIAL / NOTES S275 channel and plate; molds cast Al-Si (lead-free scrap); pin 42CrMo4 QT. See bom/bom.csv					
Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com					Generated from cad/src; do not edit by hand