



REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-09-30	AC

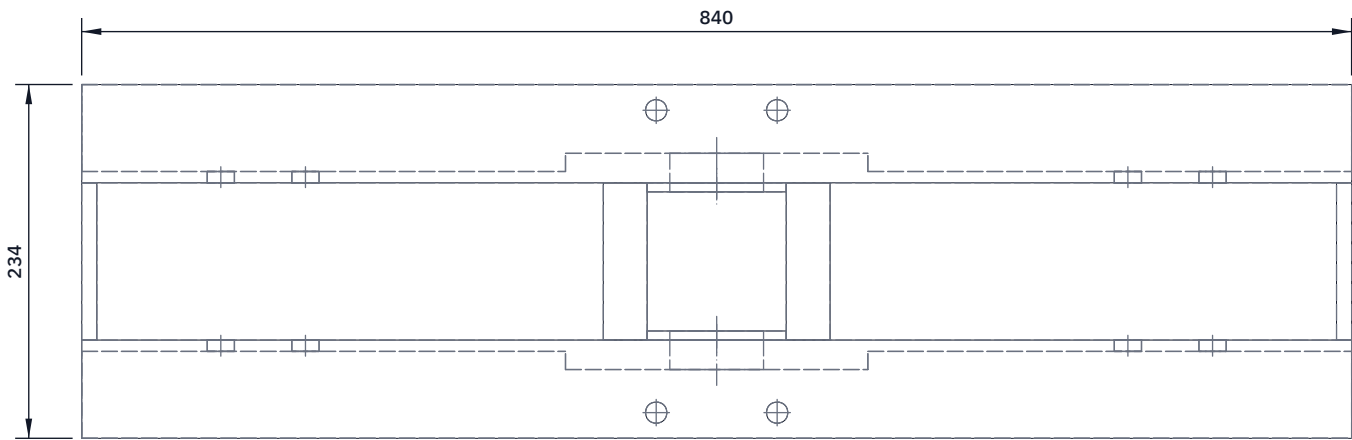


TOP VIEW

Scale 1:5; looking down (along -Z)

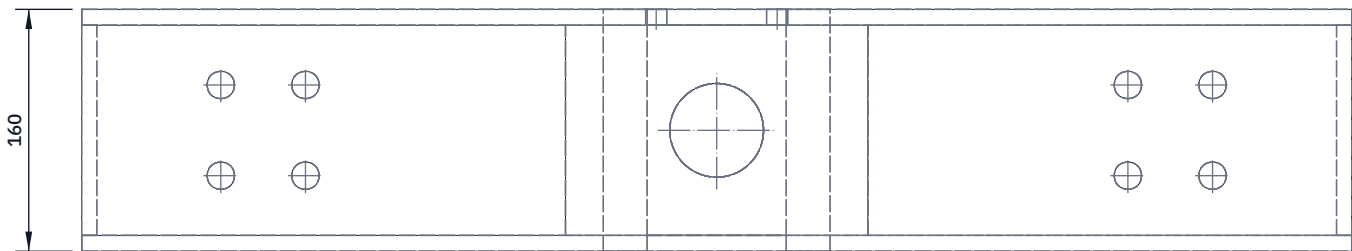


FRONT VIEW

Scale 1:5; looking at the front (along +Y)

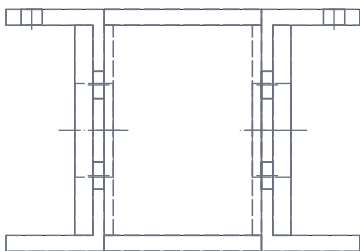

RIGHT VIEW

Scale 1:5; looking at the right side (along -X)

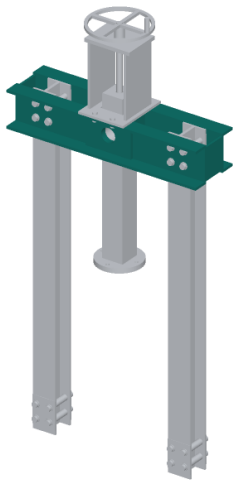

WHERE IT GOES

This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

As the base beam: two UPN 160 channels 840 mm, webs 104 mm apart, 10 mm end blocks, joint holes 18 mm at 272 and 328 mm each side, 50 and 110 mm up from the beam bottom.

Doublers: 12 x 200 x 139 mm plate, one on the outside of each web, in the middle, 6 mm fillet weld all round.

Pin bore: 62 mm through both webs and doublers, 80 mm up (mid-height).

Clamp the channels together and cut both with a 62 mm annular cutter (hired magnetic drill); weld the end blocks with a 60 mm bar through.

Bracket holes: four 14 mm in the top flanges, 40 mm each side of the middle, 100 mm each side of the centre line.

Guides (UHMW-PE): two blocks 29 x 104 x 160 mm, 46 to 75 mm each side of the middle; two 6 x 92 x 139 mm strips on the webs with 62 mm holes on the pin. Two M6 countersunk screws each, through the web.

Fit: the stem slides between the guides with 1 mm each side.

Check: a 60 mm bar slides through both bores by hand.

POTPRESS

github.com/BoujeeEnjinia1701/potpress

PotPress top crossbeam with doublers and guides: making sketch

DRAWING NO.

PPR-DWG-104

REV

P1

SHEET

1 of 1

SIZE

ANSI B

SCALE

1:5

UNITS

mm

PROJECTION



DATE

2026-09-30

DRAWN

Amish Chadha

MATERIAL / NOTES

Two UPN 160 channels 840 mm; 12 mm plate; UHMW-PE; S275