
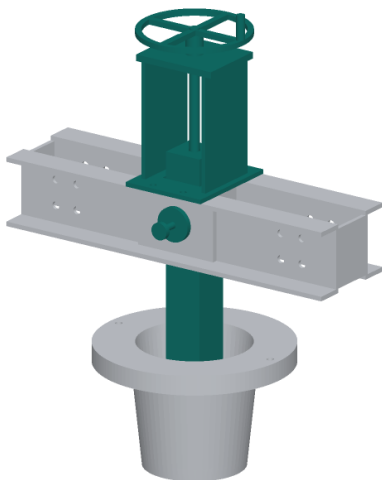
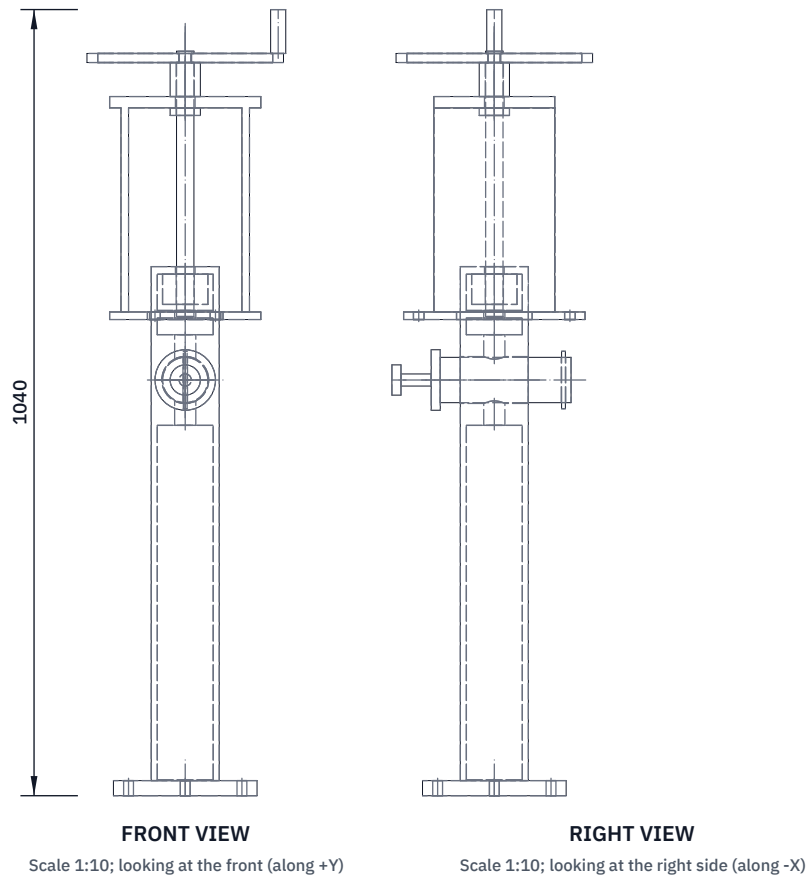


REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-09-30	AC

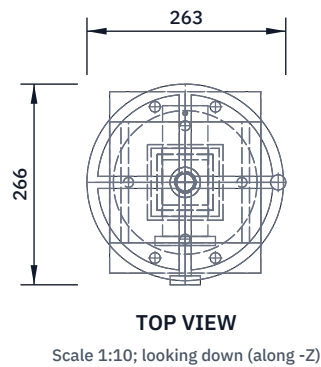

HOW TO MAKE IT AND HOW IT FITS

Stem: SHS 90 x 90 x 8, 670 mm, welded square on a 190 x 20 mm disc with four 13 mm holes at 75 mm. Pin block 74 x 74 x 120 mm inside, centre 530 mm up; bore 62 mm across it, then a 28 mm hole down its middle.

Nut box: captive Tr24 nut (60 x 60 x 40) under a 10 mm cap plate (26 mm hole), a 10 mm floor with a 28 mm hole 8 mm below the nut.

The nut lifts the stem by the cap; the 8 mm gap is the float.

Load pin: 60 mm 42CrMo4, quenched and tempered, 173 mm shank, 80 x 12 mm head turned on, pull knob, 6 mm hole for the R-clip. Do not weld it.

Bracket: 200 x 240 x 10 mm base with a 100 mm square hole and four 14 mm holes; two 10 mm side plates 270 tall at 80 mm each side; a 200 x 160 x 15 top with a 26 mm hole. Bolted to the top beam, 4 x M12.

Screw: Tr24 x 5, about 360 mm, held by two collars at the top plate, 260 mm handwheel with a crank knob. 40 turns lift the mold 200 mm.

Check: the pin slides through beam and stem together by hand.

POTPRESS

github.com/BoujeeEnjinia1701/potpress

PotPress male mold slide: stem, load pin and crank: making sketch

DRAWING NO.
PPR-DWG-109

REV
P1

SHEET
1 of 1

SIZE
ANSI B

SCALE

1:10

UNITS

mm

PROJECTION



DATE

2026-09-30

DRAWN

Amish Chadha

MATERIAL / NOTES

SHS 90 x 90 x 8; 42CrMo4 bar; 10 and 15 mm plate; Tr24 x 5 screw