

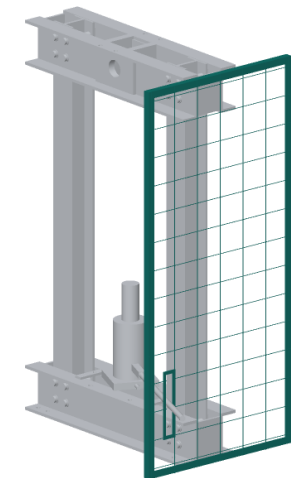


REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-09-30	AC

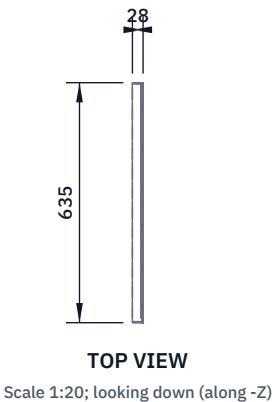

WHERE IT GOES
This part in colour, its neighbours in grey

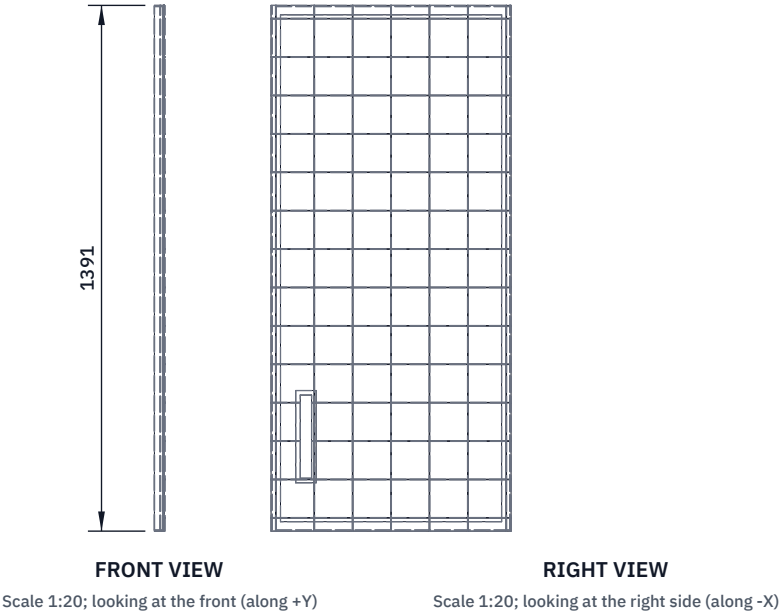

HOW TO MAKE IT AND HOW IT FITS

Seven panels, each mesh on a welded frame of 25 x 25 x 3 angle:
sides 635 (right) and 675 (left) x 1,391 mm; rear 940 x 1,391;
front strips 180 x 1,391; lower front 580 x 320; roof 940 x 675
with a cut-out round the top beam. Mesh drawn at every 8th wire.
Pump slot (right side): 30 x 220 mm, 200 to 420 mm up, centred 218 mm
in front of the middle; frame it with 3 mm strip and a brush strip.
Interlock holes (front right strip): 44 mm square at the release
shaft and a 40 mm square for the pin cable.
Fixing mesh: clamp it under bolted flat strips, or grind the zinc
off before welding (fume: see safety stops).
Standoffs: eight 40 x 6 mm flat bars bolted to the beam webs; the
side panels bolt to them. Panels bolt to each other with M8.
Right front strip sits 40 mm back to leave a pocket for the interlock.
Check: flat within 3 mm; no panel over about 10 kg.

POTPRESS		github.com/BoujeeEnjinia1701/potpress		
PotPress fixed mesh guards (right side guard drawn): making sketch				
DRAWING NO. PPR-DWG-110		REV P1	SHEET 1 of 1	SIZE ANSI B
SCALE 1:20	UNITS mm	PROJECTION 	DATE 2026-09-30	DRAWN Amish Chadha
MATERIAL / NOTES Galvanised welded mesh 12.7 x 12.7 x 1.6 mm; 25 x 25 x 3 angle				
Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com			Generated from cad/src; do not edit by hand	